



鼎圣集团
DINGSHENG GROUP

电缆桥架系列

Cable Support Series

鼎圣集团有限公司
DINGSHENG GROUP CO., LTD.

企业简介

Enterprise Introduction



鼎圣集团有限公司（原镇江鼎圣电器有限公司）是输配电行业的大型制造企业，全国质量管理优秀企业，江苏省高新技术企业。已形成高低压成套设备、智能母线、新能源、抗震支架系统、弱电布线系统及充电桩等6大产业板块。公司地处中国电力电气产业化基地——江苏·扬中，占地面积120000平方米，建筑面积80000平方米，固定资产5.8亿元，拥有多项专利技术证书。

鼎圣集团有限公司技术力量雄厚、生产装备先进。生产制造过程严格按ISO9001质量体系运行，所有产品均通过了各项试验与认证。鼎圣集团有限公司积极开展与国际知名企业合作，近年来，公司与西门子、ABB、GE精诚合作，授权开发生产SIVACON 8PT、MLS-V、MD190等具有先进结构的成套开关设备。公司坚持不懈地以质量为本，从质量管理的每个细节入手，公司内部



实行ERP管理系统，实施严密、高效的质量管理，确保鼎圣产品精益求精，品质卓越。鼎圣产品广泛应用于电网、数据中心、发电、炼油、环保、交通等行业，为各行业用户提供了一流的产品，得到一致的好评，深受用户的欢迎和青睐。

海纳百川，聚集世界资源优势，造百年宏伟大业，是鼎圣人的胸怀与抱负。面对竞争和挑战，鼎圣人与时俱进，用敏锐的智慧和胆略，紧紧抓住每一个机遇，为用户提供超值服务，是鼎圣集团的永恒追求。未来的鼎圣集团将是创新的鼎圣集团、环保的鼎圣集团、国际化的鼎圣集团、盼望着与您交友，与您合作，与您共同迈向美好的明天！

目

录

Table of Content

电缆桥架的选择与安装 Selection and Installation of Cable Tray	1
XQJ-钢制桥架 XQJ-Steel Cable Tray	09
HQJ-铝合金桥架 XQJ-Aluminium alloy Cable Tray	28
NDCH-A(耐火桥架)防火桥架 NDCH-Complex refractory bCable Tray	37
NDCH-B玻璃钢防腐桥架 BYQ ₁ -FRP Cable Tray	38
XQJ-SJ-电缆竖井 XQJ-SJ-Cable shaft	39
ZJ-安装支架 ZJ-Mounting bracket	44
TPC附件 TPC Accessories	52

电缆桥架的选择与安装

Selection and Installation of Cable Tray

一、适用范围 Application

系列电缆桥架适用于电压40千伏以下的电力电缆，以及控制电缆、照明配线等室内、室外架空，电缆沟、隧道的敷设。

Cable trays apply to the indoor and outside layout of Power cable, Control cable and lightening line 40kV below.

二、结构特点与安装 Structure characteristic and installation

系列电缆桥架具有品种全、应用广、强度大、结构轻、造价低、施工简单、配线灵活、安装标准、外型美观的特点，对您的技术改进、扩充电缆、维护检修带来方便。

Cable trays have many advantages such as complete categories, wide application, high tension, light, low price, easy installation, flexible, standard and beautiful appearance. It is convenient for your technical improvement. cable enlarge and maintenance.

系列电缆桥架的安装可因地制宜。可随工艺管道架空敷设；楼板、梁下吊装；室内外墙壁、柱壁、隧道、电缆沟壁上的侧装。还可在露天立柱或支墩上安装。大型多层桥架吊装或立装时，应尽量采用工字钢立柱两侧对称敷设。

Cable trays can suit measures to local conditions. They can be installed along with pipes or hanged under floor or beam. They can also be installed at the sides of wall, pillar, trnnel indoor and outside. When many layers of cable trays are hanged and erected, they can be layer by two sides of I-beam Pillars.

系列电缆桥架可水平、垂直敷设；可转角、T字形、十字形分支；可调宽、调高、变径。

Cable trays can be laid horiaontall, vertical and be rised with angle, T or cross branches. The height, width and diameter can be adjusted.

三、电缆在电缆桥架上的层次安排 The layer arrangment of cable tray for cables

1. 电缆桥架层次排列应是弱电流控制电缆在最上层、接着一般控制电缆，低压动力电缆，高压动力电缆依次往下排列。（见下页表）这种排列有利于屏蔽干扰、电力电缆冷却、方便施工。

The upper layer can place week current cable, Then control cable by layer, Hy this means it can avoid shield and the cooling of power cable. It is also convenient to install cable tray.

四、电缆桥架横截面和邦高(边高)选择 To select section and side height of cable tray

1. 横截面选择 To select section

$$S_D = n_1 \cdot \pi \cdot d_1^2 / 4 + n_2 \cdot \pi \cdot d_2^2 / 4 + \dots + n_n \cdot \pi \cdot d_n^2 / 4 (\text{mm}^2)$$

$$S = K \cdot S_D / \eta$$

层次 Layer	电缆类别 Cable Categories	配套电缆桥架的名称 Names of cable Tray	备注 Addition
上 up : : : : : 下 Down	弱电类电缆 Weak Current Cable	带护罩的槽式、托盘式 Channel type & tray type with covers	不同组别的 电缆之间应加设 隔板 Barriers shall be placed between different groups of cable
	一般控制电缆 Control Cable	托盘式、槽式、梯级式 Tray type, Channel type and ladder type	
	低压动力、照明电缆 LV Power cable & Lightening cable	梯级式、托盘式、槽式 ladder type, Tray type and channel type	
	高压动力电缆 LV Power cable	带护罩的梯级式、托盘式 ladder type, & tray type with covers	

式中 S_D —电缆总截面积(mm^2); S_D —total section area of cable (mm^2)

$n_1、n_2 \cdots n_n$ —同型号规格电缆根数; $n_1、n_2 \cdots n_n$ —Cables of same specification.

$d_1、d_2 \cdots d_n$ —同型号规格电缆直径; $d_1、d_2 \cdots d_n$ —Cables of same specification Dia.

S —托盘、梯级等横截面积(mm^2); S —section area of tray or ladder cable tray.

K —余量系 数, 取1.10~1.25; k —Allowance coefficient 1.10~1.25

η —填充 率, 动力电缆取45% - 50%, 控制电缆取50% - 70%。

η —Packing rate: Power cable 45% - 50%, Control cable 50% - 70%.

2. 邦高 (边高) 选择 To choice the height of side of cable tray

非梯式桥架邦高 (边高) H 值确定原则:

To ascertain the height of side of non-ladder cable tray (H);

a. 对于控制电缆敷设不得超过邦高 (边高) 的2/5;

Control cable laying height 2/5 of the height of side;

b. 对于动力电缆敷设不得超过邦高 (边高) 的2/3。

Power cable laying 2/3 of the height of side.

梯式桥架的邦高 (边高) 确定为: 按上述原则确定的 H 值加25mm(即 $H+25\text{mm}$)

To ascertain the height of side of ladder cable tray: The above-metioned $H+25\text{mm}$

注意: 当电缆根数过多时, 可采用多层桥架敷设; 电缆根数较少时, 不同性质的电缆可以在同一桥架内敷设, 但中间需要隔板隔开。

Notice: When cables are too mush, several layers can be laid; When cables are few, different specifications cables can be Laid at the same cable tray. However barrier shall be placed between them.

各层电缆桥架层间距离为 The distance between layers

控制电缆 $\geq 200\text{mm}$ Control cable $\geq 200\text{mm}$

动力电缆 $\geq 300\text{mm}$ power cable $\geq 300\text{mm}$

机械化敷设电缆 $\geq 400\text{mm}$ Mechanical erection cable $\geq 400\text{mm}$

五、载荷等级选择 To choice loading capacity

1. 所选托盘、梯架的承载能力应满足工作均布载荷小于额定均布载荷。如果实际跨距不等于2m或者有附加集中载荷时，应根据下式换算成等效工作均布载荷。

Average loading capacity tray type and ladder type cable trays shall be lower than rated average loading capacity. If actual span is equal to 2m of there is additive loading, the average loading as follows.

$$q_p = 2P/L$$

式中P—附加集中载荷(n)

P—additive loading(n)

L—跨距(m); L—span(m)

q_p —等效均布载荷值。

q_p —average loading value

2. 实际工程中，特殊载荷条件如超重、大跨距的情况是经常碰到的，其支、吊装、托盘、梯架型式可由用户提出详图，也可以委托公司设计、验证，但都必须满足强度、刚度、稳定性要求。对于本样本给出的桥架、托臂等支、吊架的承载资料仅供参考使用

Special loading conditions such as over loading of big span etc, often occur. The drawing about support hanger, tray and ladder type are supplied by users. Our Company can also design for users. But we must meet tension, rigid and stability requirements. If all files are supplied by users, We will not be responsible of the fault of loading problem. The loading files about cable tray, hanger, bracket of this brochure are supplied for your reference.

六、表面处理选择 To choice surface treatment

电缆桥架是薄壁钢结构件，为使其能适应不同的环境要求和有较长的使用寿命，我公司对电缆桥架的表面处理工艺做了大量的工作。如镀锌工艺，产品经酸洗、碱洗、水洗、钝化、镀化、在钝化、使镀锌层的里层和表面都形成一层高质量的钝化膜、其抗腐蚀能力可提高5~8倍，特别是对热浸锌工艺的改进使热浸锌桥架其表面质量符合美国、加拿大等国家的先进标准，其在沿海地区的使用寿命能超过40年。

Cable tray is made of this steel plate. In order to fit different environment requirements, our company has done a lot of work about surface treatment. For example, galvanizing technology: after the products have passed the procedures of acid pickling, alkali pickling, water cleaning, inactivating, zinc-plating, a high quality, inactivating, zinc-plating, reactivating, a high quality purified thin coating will be formed on the surface and in the layer of zinc-plating. Then the anti-corrosion capacity of cable tray is improved 5-8 times more. Especially the improvement of hot galvanizing technology makes the surface treatment quality of our factory conform to American & Canadian standards. The cable tray of our factory can be used for more than 40 years in the coastal areas.

各表面处理特性及技术指标如下：

Surface treatment characteristics and technic indexes:

1、电缆桥架热浸镀锌层特性及技术指标

Characteristics and technic indexes of hot galvanizing cable tray.

(1) 热浸镀锌层重量及厚度，符合美国NEMA . VEI标准和美国依巴斯柯公司 (EBASCO) 电缆托盘规范的规定。

(1) Weight and thickness of hot galvanizing layer, which conform to American NEMA.VEI Standard and American EBASCO Cable tray stipulations.

电缆桥架热浸镀锌层重量、厚度

Hot galvanizing layer's Weight And Thickness

材料规格 Material's specifications	表面锌层最小重量、厚度 Least weight and thickness of hot galvanizing layer	
	重量 (克/米 ²) Weight(g/m ²)	厚度 (微米) Thickness(μm)
钢制结构件厚度 ≥5mm	610	85
Steel frames Thickness <5mm	458	65
螺栓连接件直径 ≥10mm	381	54
Bolts & nuts Dia. <10mm	305	43

(2) 镀锌层附着力符合美国ASTM · A153-80《钢铁零件热浸镀锌技术规范》中的撬剥法及锤击法的要求。

(2) Galvanizing layer adhesion conform to the Hot Galvanizing Technic Stipulations of steel parts of ASTM. A153-80.

(3) 镀锌层均匀性符合GB3091-82《低压流体输送用镀锌焊接钢管》或美国ANSI · C · 80 · 1 · 1977《刚性钢管镀锌规范》中的“硫酸铜浸渍法”规定。

(3) Well distribution of galvanizing layer conforms to Zinc-plating Welding Steel pipe of Low Pressure Liquid conveyance of GB 3091-82 Standard or Zinc-plating stipulationj of Rigid steel pipe of American ANSI. C.80.1.1997

(4) 镀锌层耐腐蚀性能参见镀锌层平均腐蚀速度试验数据

(4) Anti-corrosion performance of galranizing layer refers to test figures of average corrosive speed

日本镀锌协会大气暴露试验数据

Open Air Test Figures of Japan Zinc-Plating Association

锌层重量 Galvanizing Layerweight 耐腐蚀性能 Anti-corrosive performance 大气环境 Air Environment	400克 / 米 ² (g/m ²)		500克 / 米 ² (g/m ²)		600克 / 米 ² (g/m ²)	
	腐蚀速度 克 / 米 ² · 年 Corrosive speed g/m ² annual	耐用 年限 Life	腐蚀速度 克 / 米 ² · 年 Corrosive speed g/m ² annual	耐用 年限 Life	腐蚀速度 克 / 米 ² · 年 Corrosive speed g/m ² annual	耐用 年限 Life
重工业地区 Heavy industry area	31.1	11.6	32.8	13.7	31.1	17.4
海岸地区 Coastal area	12.4	29.0	12.5	36.0	12.3	43.9
郊外地区 Rural area	7.1	50.7	7.2	62.5	6.7	80.6
城市地区 Urban area	15.7	22.9	16.0	28.1	15.9	34.0

注：表内资料引自日本《电设工业》1977 · 6。

Note: Above data has been cited from in 《Electrical Equipment Industry》 1977 · 6

国内试验数据

Doments Test Figures

大气环境 Air Environment 耐腐速度 Corrosive speed	上海杨树浦工业气候 (户 外) Shanghai yangshuPu Industry Climate (Outside)	广州市城郊气候 (户 外) GuangZhou Rural Area Climate (Outside)	海南岛榆林海洋气候 (户 外) Hainan Is land Yulin Sea Climate (Outside)
钢构件镀锌 平衡腐蚀速度克/米 ² ·年 Steel parts' Galvanizing g/m ² annual corrosive speed	23	37	47

注：上述资料引自国防工业出版社《电镀手册》

Note: Above data has been cited from in 《Galvanization manuaud》

2. 电缆桥架电镀锌技术质量指标 Galvanizing technic quality index of Cable tray

镀锌层厚度 (附着量) Galvanizing layeer Thickness	桥架构件 Parts of cable tray		≥12μm(84g/m ²)
	螺栓 Bolts	≥M14	≥12μm(84g/m ²)
		M8-M12	≥9μm(63g/m ²)
		≥M6	≥6μm(42g/m ²)
表面钝化处理 Surface Inactivation Treatment	经钝化处理后，应有良好的钝化膜（白色、虹色） After having been in activated, the layer has fine in activation coating (white, rainbow)		
锌层附着力 Galvanizing Layer Cohesion	划线、划格法试验锌层不应起皮剥离 The layer dows not peel by scratch test.		
外 观 Appearance	锌层表面应光滑均匀、致密、不得有起皮、气泡、花斑、局部未镀、划伤等缺陷 Galvanizing layer surface is smooth, even, delicate without Peeling, bubble, scratch, spot		

注：电镀锌后钝化桥架表面形成钝化膜，将明显提高其防腐寿命

Note: After inactivating the film of cable tray surface is formed, the life of anti-corrosion will be risen.

3. 电缆桥架喷涂粉末技术质量指标 Technic quality indexes of cable tray spray powder.

项目 Item	涂料 Paint	环氧树脂粉末 Epoxy resin	聚 酯 粉 末 Polyester powder
厚度 Thickness (μm)		≥60	≥60
附着力级 Cohesion		2	2
冲击强度 J Impact Tension (kgf.cm)		≥5 (≥50)	≥3 (≥30)
柔韧性(mm) Pliable & tough		≤2	≤3
边角覆盖率 (%) Edge Cover rate		≥30	≥30
外 观 Appearance		均匀光滑、不起泡、无裂纹、色泽均匀一致 Even and Smooth without bubble, crack colours are well distributed	

我公司桥架表面处理可分为喷涂、镀锌、镀锌加喷涂、热浸锌、镀锌镍、热喷锌，对各自的性能和特点进行比较列表如下：

Surface treatment of our cable tray has six ways (spray, zinc-pleting, zinc-plating with spray, hot galvanizing, Nickec zinc-plating, zinc-plating). The six ways have different performances as follow.

类别 项目 Sort Item	喷 涂 spray	镀 锌 Zinc-Plating	镀锌加喷涂 Zinc-Plating with spray	热浸锌 Hot Galvanizing	镀锌镍 Nickec zinc-plating	热喷锌 Zinc-plating
外 观 Appearance	很 好 Very good	好 Good	很 好 Very good	一 般 Normal	很 好 Very good	很 好 Very good
表面处理变形 Surface Treatment Deforming	不 No	不 No	不 No	变形 Deforming	不 No	不 No
环境要求 Enviroment demmand	室内、常温、干燥 Indoor & dry, Normal temperature	室外、轻腐蚀 Outside, light anti-corrosion	室外、高温、潮湿 Outside wet high temperature	室外、重腐蚀 Outside, heavy corrosion	室外、重腐蚀 Outside, heavy corrosion	室外、重腐蚀 Outside, heavy corrosion
使用寿命(年) Life (year)	10	12	14	>40(镀锌80μm)	> 30	> 30
价 格 Price	一 般 Normal	一 般 Normal	较 高 Fairly night	较 高 Fairly night	较 高 Fairly night	较 高 Fairly night

七、支、吊架配置 Bracket, hanging support selection

1. 桥架均布载荷与支、吊架跨距的平方成反比。例如，在跨距 $L=2m$ 时，额定均布载荷为 q_E ，当桥架实际的跨距 L_G 不等于 $2m$ 时，工作均布载荷 q_G 应满足： $q_G \leq q_E(L/L_G)^2$ 。

The uniform load of cable tray is inverse ratio with span of bracket or hanging support. For example, the span of supports is $L_G=2m$, rated uniform load is q_E . When $L_G \neq 2m$. Working uniform load is $q_G \leq q_E(L/L_G)^2$

若实际跨距为3、4、5、6m……时代入上式

According the equation. $L_G = 3, 4, 5, 6m$. we get the following result:

3m; $q_G \leq 0.44q_E$ 4m; $q_G \leq 0.25q_E$ 5m; $q_G \leq 0.16q_E$ 6m; $q_G \leq 0.11q_E$

可见，支吊架跨距越大，托盘、梯架的承载能力越小，用户和设计单位在选用时一定要注意，不要仅着重选择桥架的跨度而忽视了桥架的承载计算。

From above calculating: the longer span of support, the less load of cable tray. Customers select not only the span of cable tray, but also to pay attention the load of cable tray.

2. 在确定支、吊架跨距时，除满足工作均布载荷小于或等于额定均布载荷之外，还要满足相对挠度小于或等于 $L/200$ 。

To determine the span of cable tray supports, besides to meet the uniform load less or equal rated uniform load, but also to meet the deflection (in unit) Less or equal $L/200$.

八、注意事项 Matters Needring

1. 系列电缆桥架的最大载荷、支撑间距应小于允许载荷和支撑跨距。

The maximum load, span of supports cable tray must be less allowable load and span of supports.

2. 桥架的安装应以国家规范为准，目前可参照《电缆桥架安装图集86S D169》进行。桥架在安装过程中严禁载人，如现场情况确定有必要时，必须有安全保障设施方可载人，本事项对于不合格或非专业的操作人员尤为重要。

The installation of cable tray must comply with the national standard, at the present time, to abide by the installation drawing 《86 SD169》 leaf lets. When installation. to carry people by cable tray is forbidding. if necessary, to ensure the safety measures, in this situation, allowing to carry people. It is important to non-professional operating workers.

3. 桥架的立柱、托盘等支架可与基础预埋件焊接固定，也可采用膨胀螺栓固定，对于现场焊接处一定要做好防腐处理，通常由用户现场涂刷防腐漆。

The bracket and vertical column of cable tray will be installed by welding or expansion bolt of the basement, the welding place treatment will be done by painting.

4. 系列电缆桥架水平敷设时，桥架间的对接处距支承点的距离应在跨距的1/4以内，对于大跨距桥架最好放在支承架上对接，在有弯通或三通的地方则需单独增加支承点，垂直方向的托臂每隔1.5m设一固定点。

When cable tray be installed in horizontal position, the distance from connection point of cable tray to support must be in 1/4 span, the connection ideal point of cable tray is in the support. There is a place of elbow or Tee tray. It is necessary to add the support or bracket. The distance between brackets in vertical direction is 1.5m.

5. 桥架内的电缆应用电缆卡带、或金属电缆卡子进行分组固定。对于水平敷设的电缆通常每隔2m左右作一固定点；对于垂直敷设的电旨应 每隔1~1.5m固定一次，在改变标高的端部也应予以固定。

Cable in the tray will be fixed by cable band. The cable band may be metal material. When cable tray in horizontal position, the distance of the fixed point is 2m. In vertical position, the distance is 1 or 1.5m. The level of cable tray is changeed,also in the change point, the cable must be fixed.

6. 电缆桥架按电力施工规范要求应进行良好接地，对于镀锌电缆桥架无须有专门接地装置，其本体即可作为接地干线；对于表面进行非金属处理的桥架必须有专门的接地装置；桥架的接地线可用BVR电缆或铜编织线，该线通常由用户自备，如由本公司供货，则应在合同中注明，长距离的电缆桥架每隔30~50m接地一次。

According to < ELectrical Construction Rules >, cable tray will be well grounded, to zinc-plating cable tray, the cable tray body is good grounding trunk, to non-metal treatment of cable tray surface, they must have a special grounding device. the grounding wire is to use BVR cable or braid wire, in the long distance cable tray gronding point is in every 30-50m once again. In general the grounding wire will be purchased by our customer, If be supply by our comapny. Please note in contract.

7. 本《电缆桥架》产品说明书出版日期为二00五年十一月，系本公司现行有效版本。

Cable tray manual published in November 2005. It is a newly revision.

8. 本说明书给出的桥架及附件在保证使用性能不受影响的前提下，本公司有权对其结构进行修改。We guarantee the properties of cable tray and it's accessories given by this manual. At this condition, we will change cable tray structure. without notice.

九、电缆桥架型号编制说明 Compile Introduction of Cable Tray Type

XQJ	钢制桥架 Steel cable tray	HQJ	铝合金桥架 AL. alloy cable tray
NDCH	防火桥架 Fire prevention cable tray	BHQ	玻璃钢桥架 Fiberglass cable tray

- 1、桥架系列代号 Codes of lists of cable trays
- 2、大跨距型桥架代号（非大跨距桥架无本代号） Codes of wide span cable trays(other's are no code)
 - DJ-I普通大跨距桥架 Normal wide span cable tray
 - DJ-II重载型大跨距桥架 Heavy load wide span cable tray
- 3、型号代号 Type codes
 - T-梯级式桥架 Ladder type cable tray
 - P-托盘式桥架 Tray type cable tray
 - C-槽式桥架 Channel type cable tray

XQJ-钢制桥架

说明

钢制电缆桥架是我公司吸取国内外同类产品的优点，采用先进的工艺加工而成，具有结构简单，形式灵活多样、价格便宜、安装便利等特点。是使用最多、应用最广的桥架。

Instruction


Our company manufactures XQJ general type by introducing the strongcomings of same products home and abroad and adopting advance craft. It has advantages of simple structure, flexible form, low price, convenient installation. It is most widely used.

XQJ-T型梯级式电缆桥架是根据国内外有关资料而改进设计的，它具有重量轻、成本低、造型别致、安装方便、散热、透气性好等优点。它适用于一般直径较大电缆的敷设，特别适用于高、低压动力电缆的敷设。

XQJ-T model step cable bridge is designed on the basis of corresponding documents in and abroad. It has many advantages: light weight, low cost, reasonable construction, easy installation, heat radiation and permeation etc. It applies to laying of cables with big diameter, epecially to laying of high and low voltage power cables.

梯级式电缆桥架在不同跨距下最大允许均布载荷及变形量见下图：

See the graph below for maximal permissible uniform load and deformation of step type cable bridge with different spans.


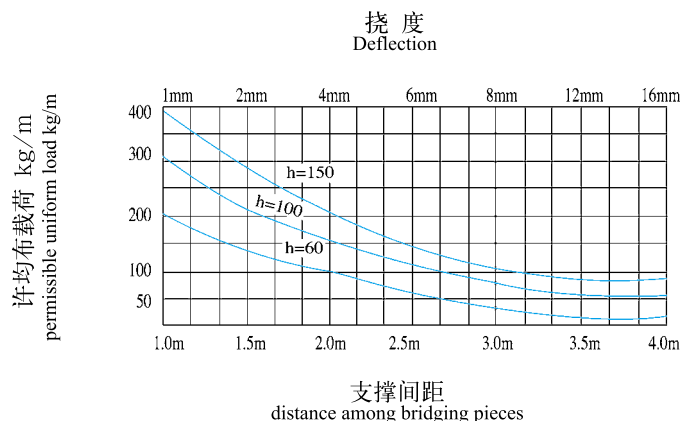


XQJ-P托盘式电缆桥架是石油、化工、电力、轻工、电视、电讯等方面应用最广泛的一种。它具有重量轻、载荷大、造型美观、结构简单、安装方便等优点。它适用于动力电缆的安装，也适用于控制电缆的敷设。

XQJ-P Model pallet cable bridge is widely used in the fields of petroleum, chemical industry, electrical power, light industry, television and communication etc. It can install not noly power cables, but control cables, with outstanding advantages: light weight, heavy load, reasonable construction, simple structure and easy mounting etc.

托盘式电缆桥架在不同跨度下最大允许均布载荷及变形量见下图：

See the graph below for maximal permissible uniform load and deformation of pallet type cable bridge with different spans.

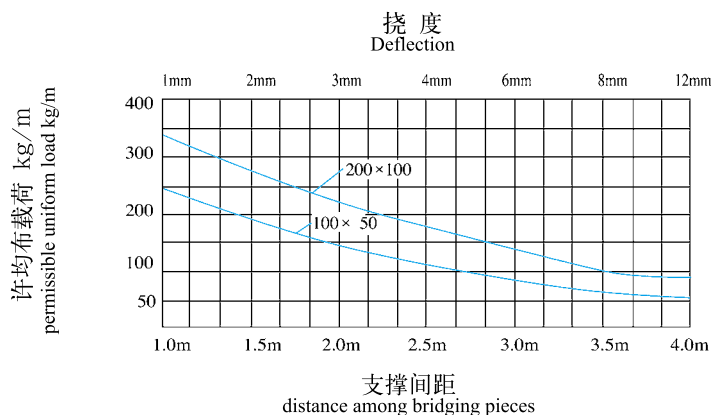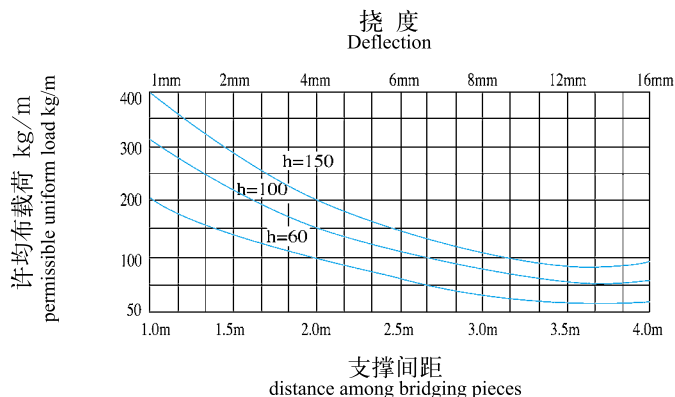

XQJ-C槽式电缆桥架是一种全封闭型电缆桥架。它最适用于敷设计算机电缆、通信电缆、热电偶电缆及其它高灵敏系统的控制电缆等。它对控制电缆的屏蔽干扰和重腐蚀环境中电缆的防护罩都有较好效果。

XQJ-C Model channel cable bridge is one fully enclosed cable bridge. It's the best to lay computer cable, communication cable, thermocouple cable and other control cables of high sensitive systems ect. It can screen disturbance for control cable and protect cable from corrosion in seriously corroded environment effectly.

槽式电缆桥架在不同跨度下最大允许均布载荷及变形量见下图：

See the graph below for maximal permissible uniform load and deformation of channel cable bridge with different spans:

梯级式和托盘式电缆桥架备有护罩，需要配护罩时可在订货时注明或按照护罩型号订货，槽式和梯级式桥架的配件通用。


电缆桥架其表面处理分为静电喷塑、镀锌、热浸锌、喷漆、镀锌镍等，在重腐蚀环境中可特殊防腐处理，如复合镀等。用户所需电缆桥架如超出本标准范围的品种规格，亦可来图、来函或面洽，我公司尽可能满足您的需要。

In addition, cleadings are prepared for step type cable bridges and pallet type cable bridges, you should refer to item when you order goods or make order according to cleading models you need. All the matching parts may be used for pallet and channel and step type bridges.

The peface treatment for cable bridge includes: electrostatic coating plastic, zinc, zinc hot dipping, painting and nickel plating etc. special corrosion protection treatment for seriously corroded enviromment, such as composite electroplate, if the cable bridge is not in the range of models involved, welcome to your drawing sheets, letters and arrival and our company will try our best to meet your requirements.


XQJ-T-1 型梯架

XQJ-T-1 Stair Frame

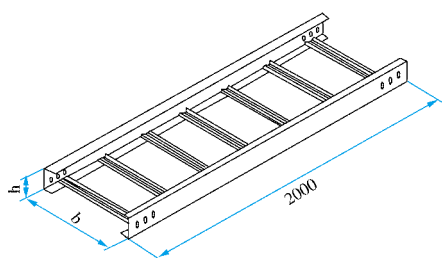

XQJ-P-1 型托盘式桥架


XQJ-P-1 Tray Bridge Frame

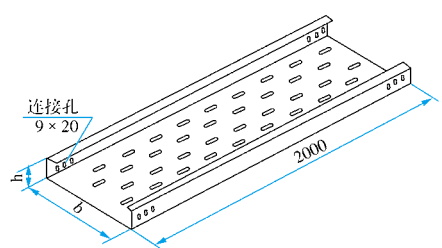

型号 Model	b (mm)	h (mm)	重量 kg Weight	
			T-1	P-1
XQJ-T-1 XQJ-P-1	-206	200	60	12.69
	-2010	200	100	19.38
	-2015	200	150	28.84
	-306	300	60	13.97
	-3010	300	100	20.69
	-3015	300	150	30.05
	-3020	300	200	26.96
	-406	400	60	20.82
	-4010	400	100	25.27
	-4015	400	150	31.41
	-4020	400	200	35.12
	-506	500	60	23.24
	-5010	500	100	26.57
	-5015	500	150	32.70
	-5020	500	200	38.27
	-606	600	60	23.09
	-6010	600	100	27.96
	-6015	600	150	34.08
	-6020	600	200	40.18
	-806	800	60	28.20
	-8010	800	100	31.82
	-8015	800	150	37.94
	-8020	800	200	44.04
	-10010	1000	100	41.52
	-10015	1000	150	48.86
	-10020	1000	200	56.23


XQJ-T-2 型水平弯通

XQJ-T-2 Horizontal Bend

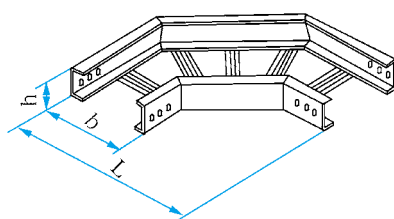

XQJ-P-2 型水平弯通


XQJ-P-2 Horizontal Bend

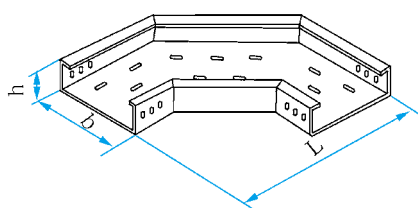

型号 Model	b (mm)	h (mm)	L (mm)	重量 kg Weight	
				T-2	P-2
XQJ-T-2 XQJ-P-2	-206	200	60	500	6.24
	-2010	200	100	500	7.38
	-2015	200	150	600	13.25
	-306	300	60	600	7.91
	-3010	300	100	600	9.18
	-3015	300	150	700	15.85
	-3020	300	200	700	18.48
	-406	400	60	700	8.45
	-4010	400	100	700	10.44
	-4015	400	150	800	17.72
	-4020	400	200	800	19.65
	-506	500	60	800	11.16
	-5010	500	100	800	13.37
	-5015	500	150	900	20.56
	-5020	500	200	900	25.42
	-606	600	60	900	12.93
	-6010	600	100	900	15.48
	-6015	600	150	1000	22.68
	-6020	600	200	1000	26.19
	-806	800	60	1100	14.41
	-8010	800	100	1100	17.23
	-8015	800	150	1100	26.92
	-8020	800	200	1100	30.85
	-10010	1000	100	1100	28.41
	-10015	1000	150	1200	31.76
	-10020	1000	200	1200	36.65


XQJ-T-3 型水平三通

XQJ-T-3 Horizontal 3-Tee




XQJ-P-3 型水平三通

XQJ-P-3 Horizontal 3-Tee




XQJ-T-4 型水平四通

XQJ-T-4 Horizontal 4-Cross



XQJ-P-4 型水平四通

XQJ-P-4 Horizontal 4-Cross

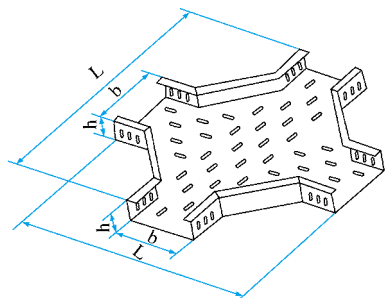


型 号 Model		b (mm)	h (mm)	L ₁ (mm)	L ₂ (mm)	重量 kg Weight	
						T-3	P-3
XQJ-T-3 XQJ-P-3	-206	200	60	800	500	8.56	10.62
	-2010	200	100	800	500	11.30	14.95
	-2015	200	150	1000	600	20.37	22.51
	-306	300	60	900	600	10.62	17.38
	-3010	300	100	900	600	13.10	19.46
	-3015	300	150	1100	700	22.47	27.97
	-3020	300	200	1100	700	25.48	36.61
	-406	400	60	1000	700	13.57	27.92
	-4010	400	100	1000	700	15.48	30.96
	-4015	400	150	1200	800	26.15	44.26
	-4020	400	200	1200	800	27.44	53.31
	-506	500	60	1100	800	14.61	35.17
	-5010	500	100	1100	800	17.30	38.50
	-5015	500	150	1300	900	27.63	51.37
	-5020	500	200	1300	900	29.08	64.15
	-606	600	60	1200	900	15.94	42.90
	-6010	600	100	1200	900	19.10	46.40
	-6015	600	150	1400	1000	29.90	62.96
	-6020	600	200	1400	1000	32.32	76.80
	-806	800	60	1400	1100	19.84	61.02
	-8010	800	100	1400	1100	22.87	64.51
	-8015	800	150	1600	1200	35.84	74.50
	-8020	800	200	1600	1200	39.40	86.10
	-10010	1000	100	1800	1400	41.91	80.01
	-10015	1000	150	2000	1600	49.70	96.22
	-10020	1000	200	2000	1600	60.53	102.01

型 号 Model		b (mm)	h (mm)	L ₁ =L ₂ (mm)	重量 kg Weight	
					T-4	P-4
XQJ-T-4 XQJ-P-4	-206	200	60	900	11.91	13.63
	-2010	200	100	900	14.31	18.60
	-2015	200	150	1100	25.28	28.85
	-306	300	60	900	14.43	21.45
	-3010	300	100	900	16.35	23.69
	-3015	300	150	1100	27.32	34.46
	-3020	300	200	1100	31.81	47.36
	-406	400	60	1000	16.47	31.82
	-4010	400	100	1000	18.95	36.47
	-4015	400	150	1200	29.45	53.49
	-4020	400	200	1200	34.08	58.81
	-506	500	60	1100	18.57	41.52
	-5010	500	100	1100	21.08	45.02
	-5015	500	150	1300	33.62	62.87
	-5020	500	200	1300	40.10	69.13
	-606	600	60	1200	21.50	50.04
	-6010	600	100	1200	24.15	53.32
	-6015	600	150	1400	36.04	73.17
	-6020	600	200	1400	41.59	81.98
	-806	800	60	1400	25.98	69.91
	-8010	800	100	1400	28.56	83.29
	-8015	800	150	1600	40.59	95.30
	-8020	800	200	1600	50.75	102.66
	-10010	1000	100	1900	54.55	115.83
	-10015	1000	150	1900	67.66	125.98
	-10020	1000	200	1900	82.16	133.34


XQJ-T-5A、B 型垂直弯通

XQJ-T-5A、B Vertical Bend

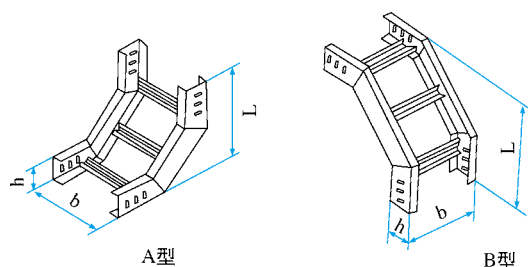

XQJ-P-5A、B 型垂直弯通


XQJ-P-5A、B Vertical Bend

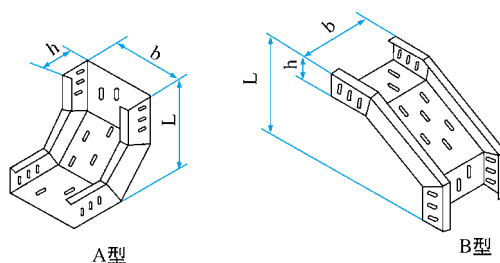

型 号 Model		b (mm)	h (mm)	L (mm)	重量 kg Weight		
					T-5AB	P-5A	P-5B
XQJ-T-5AB XQJ-P-5AB	-206	200	60	360	5.13	6.56	5.47
	-2010	200	100	400	5.89	8.89	7.62
	-2015	200	150	550	11.58	15.21	14.12
	-306	300	60	360	5.48	8.76	7.69
	-3010	300	100	400	6.63	10.79	9.64
	-3015	300	150	550	12.90	17.17	16.00
	-3020	300	200	600	20.69	26.18	24.54
	-406	400	60	360	5.68	13.67	12.51
	-4010	400	100	400	7.47	16.22	15.08
	-4015	400	150	550	14.51	24.38	22.42
	-4020	400	200	600	23.70	27.58	26.45
	-506	500	60	360	6.20	15.77	14.70
	-5010	500	100	400	7.99	18.66	17.33
	-5015	500	150	550	15.05	27.93	26.50
	-5020	500	200	600	28.02	42.77	40.45
	-606	600	60	360	8.54	28.75	27.64
	-6010	600	100	400	9.33	31.46	30.35
	-6015	600	150	550	15.57	43.59	41.86
	-6020	600	200	600	29.87	53.18	51.19
	-806	800	60	360	7.82	36.71	35.54
	-8010	800	100	400	9.61	39.63	38.57
	-8015	800	150	550	16.66	54.61	52.46
	-8020	800	200	600	31.83	64.03	61.89
	-10010	1000	100	550	16.42	56.45	54.29
	-10015	1000	150	600	21.49	66.19	63.00
	-10020	1000	200	650	42.57	75.13	72.30


XQJ-T-5C 型垂直转动弯通

XQJ-T-5C Vertical Turning Bend

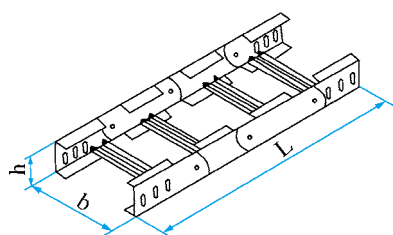

XQJ-P-5C 型垂直转动弯通


XQJ-P-5C Vertical Turning Bend

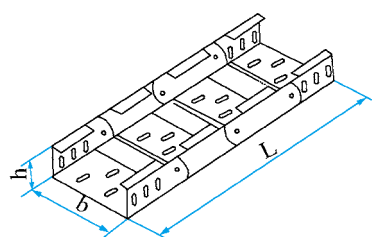

型 号 Model		b (mm)	h (mm)	L1=L2 (mm)	重量 kg Weight	
					T-5C	P-5C
XQJ-T-5C XQJ-P-5C	-206	200	60	660	6.41	7.49
	-2010	200	100	700	9.03	10.48
	-2015	200	150	950	19.05	17.36
	-306	300	60	660	9.03	8.75
	-3010	300	100	700	11.74	12.20
	-3015	300	150	950	19.71	20.41
	-3020	300	200	1100	24.89	27.78
	-406	400	60	660	7.85	18.57
	-4010	400	100	700	12.93	20.89
	-4015	400	150	950	22.06	34.15
	-4020	400	200	1100	26.61	32.00
	-506	500	60	660	8.91	21.12
	-5010	500	100	700	14.05	23.52
	-5015	500	150	950	22.78	37.71
	-5020	500	200	1100	27.91	34.39
	-606	600	60	660	13.05	23.52
	-6010	600	100	700	16.24	26.03
	-6015	600	150	950	24.35	40.12
	-6020	600	200	1100	29.08	52.63
	-806	800	60	660	16.11	28.45
	-8010	800	100	700	20.00	31.39
	-8015	800	150	950	24.93	48.29
	-8020	800	200	1100	29.99	64.51
	-10010	1000	100	700	22.72	45.81
	-10015	1000	150	950	29.56	53.54
	-10020	1000	200	1100	37.32	74.21

XQJ-C-1 槽式直通


Trough type straight

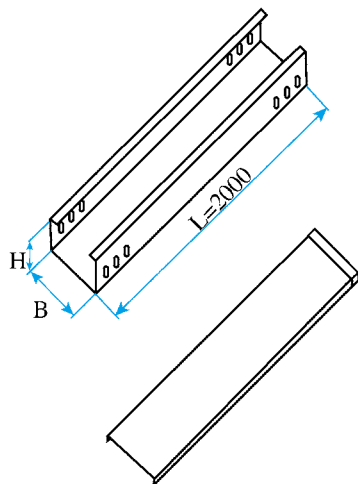

序号 No.	型号 Model	规格 B×H Size B×H	重量 (kg/节) Weight
1	XQJ-C-1-052.5	50 × 25	6.88
2	XQJ-C-1-105	100 × 50	12.44
3	XQJ-C-1-157.5	150 × 75	17.96
4	XQJ-C-1-2010	200 × 100	28.03
5	XQJ-C-1-2512.5	250 × 125	35.67
6	XQJ-C-1-3010	300 × 100	41.83
7	XQJ-C-1-3015	300 × 150	46.72
8	XQJ-C-1-4010	400 × 100	52.00
9	XQJ-C-1-4015	400 × 150	65.47
10	XQJ-C-1-4020	400 × 200	71.73
11	XQJ-C-1-5010	500 × 100	73.27
12	XQJ-C-1-5015	500 × 150	79.38
13	XQJ-C-1-5020	500 × 200	85.50
14	XQJ-C-1-6010	600 × 100	92.38
15	XQJ-C-1-6015	600 × 150	98.50
16	XQJ-C-1-6020	600 × 200	104.61
17	XQJ-C-1-8010	800 × 100	117.18
18	XQJ-C-1-8015	800 × 150	137.47
19	XQJ-C-1-8020	800 × 200	144.81
20	XQJ-C-1-10010	1000 × 100	170.41
21	XQJ-C-1-10015	1000 × 150	177.68
22	XQJ-C-1-10020	1000 × 200	192.37

XQJ-C-1F 终端封头


Terminals seal

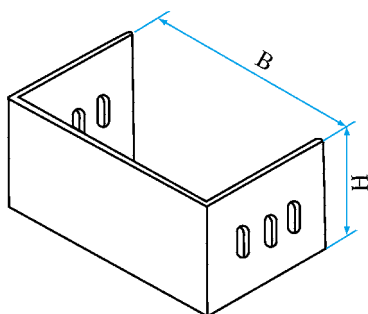

序号 No.	型号 Model	规格 B×H Size B×H	重量 (kg/节) Weight
1	XQJ-C-1F-052.5	50 × 25	0.16
2	XQJ-C-1F-105	100 × 50	0.36
3	XQJ-C-1F-157.5	150 × 75	0.61
4	XQJ-C-1F-2010	200 × 100	0.92
5	XQJ-C-1F-2512.5	250 × 125	1.28
6	XQJ-C-1F-3010	300 × 100	1.51
7	XQJ-C-1F-3015	300 × 150	2.25
8	XQJ-C-1F-4010	400 × 100	1.78
9	XQJ-C-1F-4015	400 × 150	2.39
10	XQJ-C-1F-4020	400 × 200	3.90
11	XQJ-C-1F-5010	500 × 100	2.58
12	XQJ-C-1F-5015	500 × 150	3.74
13	XQJ-C-1F-5020	500 × 200	4.35
14	XQJ-C-1F-6010	600 × 100	2.92
15	XQJ-C-1F-6015	600 × 150	4.08
16	XQJ-C-1F-6020	600 × 200	4.74
17	XQJ-C-1F-8010	800 × 100	4.37
18	XQJ-C-1F-8015	800 × 150	4.94
19	XQJ-C-1F-8020	800 × 200	6.28
20	XQJ-C-1F-10010	1000 × 100	5.41
21	XQJ-C-1F-10015	1000 × 150	6.94
22	XQJ-C-1F-10020	1000 × 200	7.94

XQJ-C-2 槽式水平弯道


Trough type horizontal bend

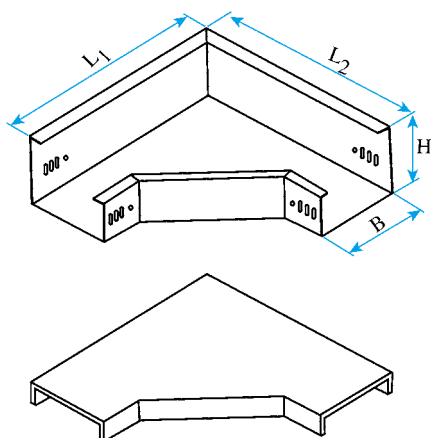

序号 No.	型号 Model	规格B×H Size B×H	长度 L ₁ =L ₂ Length L ₁ =L ₂	重量 (kg/节) Weight
1	XQJ-C-2-052.5	50 × 25	250	4.10
2	XQJ-C-2-105	100 × 50	350	7.26
3	XQJ-C-2-157.5	150 × 75	400	8.82
4	XQJ-C-2-2010	200 × 100	450	12.00
5	XQJ-C-2-2512.5	250 × 125	500	16.26
6	XQJ-C-2-3010	300 × 100	650	22.23
7	XQJ-C-2-3015	300 × 150		25.83
8	XQJ-C-2-4010	400 × 100	800	38.94
9	XQJ-C-2-4015	400 × 150		42.67
10	XQJ-C-2-4020	400 × 200		46.80
11	XQJ-C-2-5010	500 × 100	900	48.60
12	XQJ-C-2-5015	500 × 150		52.03
13	XQJ-C-2-5020	500 × 200		56.50
14	XQJ-C-2-6010	600 × 100	1000	69.73
15	XQJ-C-2-6015	600 × 150		73.52
16	XQJ-C-2-6020	600 × 200		78.34
17	XQJ-C-2-8010	800 × 100	1200	93.39
18	XQJ-C-2-8015	800 × 150		97.79
19	XQJ-C-2-8020	800 × 200		106.34
20	XQJ-C-2-10010	1000 × 100	1300	121.07
21	XQJ-C-2-10015	1000 × 150		129.48
22	XQJ-C-2-10020	1000 × 200		137.86

XQJ-C-2A-135° 槽式水平弯道


Trough type 135° horizontal bend

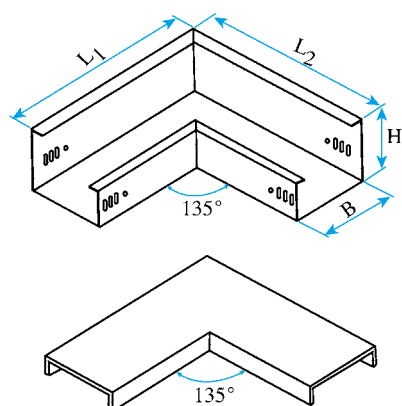

序号 No.	型号 Model	规格B×H Size B×H	长度 L ₁ =L ₂ Length L ₁ =L ₂	重量 (kg/节) Weight
1	XQJ-C-2A-052.5	50 × 25	250	4.17
2	XQJ-C-2A-105	100 × 50	350	7.12
3	XQJ-C-2A-157.5	150 × 75	400	8.38
4	XQJ-C-2A-2010	200 × 100	450	12.95
5	XQJ-C-2A-2512.5	250 × 125	500	19.97
6	XQJ-C-2A-3010	300 × 100	650	25.15
7	XQJ-C-2A-3015	300 × 150		28.31
8	XQJ-C-2A-4010	400 × 100	800	37.00
9	XQJ-C-2A-4015	400 × 150		40.44
10	XQJ-C-2A-4020	400 × 200		51.05
11	XQJ-C-2A-5010	500 × 100	900	50.19
12	XQJ-C-2A-5015	500 × 150		54.47
13	XQJ-C-2A-5020	500 × 200		58.76
14	XQJ-C-2A-6010	600 × 100	1000	68.26
15	XQJ-C-2A-6015	600 × 150		72.88
16	XQJ-C-2A-6020	600 × 200		77.48
17	XQJ-C-2A-8010	800 × 100	1200	92.90
18	XQJ-C-2A-8015	800 × 150		97.84
19	XQJ-C-2A-8020	800 × 200		102.30
20	XQJ-C-2A-10010	1000 × 100	1300	115.02
21	XQJ-C-2A-10015	1000 × 150		122.22
22	XQJ-C-2A-10020	1000 × 200		129.84

XQJ-C-3 槽式水平三通


Trough type horizontal tee

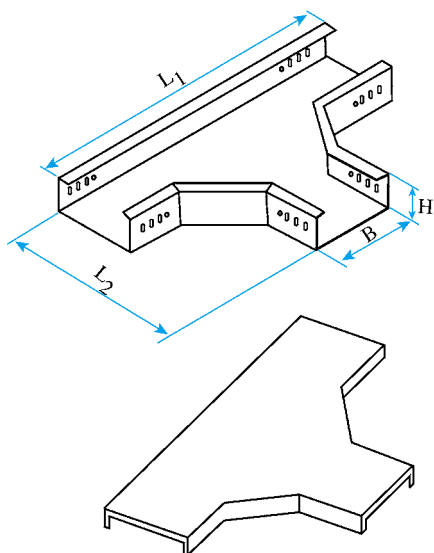

序号 No.	型号 Model	规格B×H Size B×H	长度 Length		重量 (kg/节) Weight
1	XQJ-C-3-052.5	50 × 25	450	250	4.12
2	XQJ-C-3-105	100 × 50			8.44
3	XQJ-C-3-157.5	150 × 75	650	400	9.90
4	XQJ-C-3-2010	200 × 100			15.12
5	XQJ-C-3-2512.5	250 × 125	750	500	18.49
6	XQJ-C-3-3010	300 × 100	1000	650	25.66
7	XQJ-C-3-3015	300 × 150			29.80
8	XQJ-C-3-4010	400 × 100	1200	800	44.97
9	XQJ-C-3-4015	400 × 150			49.10
10	XQJ-C-3-4020	400 × 200			57.36
11	XQJ-C-3-5010	500 × 100	1300	900	62.00
12	XQJ-C-3-5015	500 × 150			65.02
13	XQJ-C-3-5020	500 × 200			70.00
14	XQJ-C-3-6010	600 × 100	1400	1000	74.31
15	XQJ-C-3-6015	600 × 150			79.98
16	XQJ-C-3-6020	600 × 200			83.44
17	XQJ-C-3-8010	800 × 100	1600	1200	93.15
18	XQJ-C-3-8015	800 × 150			102.33
19	XQJ-C-3-8020	800 × 200			114.29
20	XQJ-C-3-10010	1000 × 100	1800	1400	123.86
21	XQJ-C-3-10015	1000 × 150			130.44
22	XQJ-C-3-10020	1000 × 200			153.36


GDQ3-C-4 槽式水平四通

Trough type horizontal cross

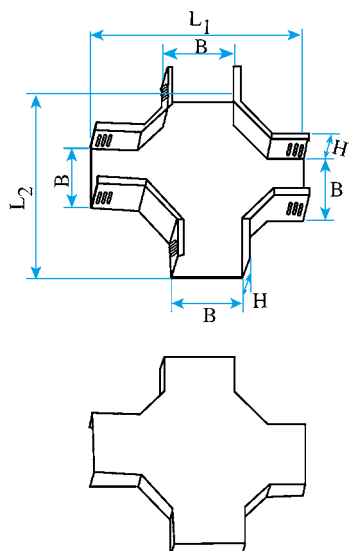


序号 No.	型号 Model	规格B×H Size B×H	长度 L1=L2 Length L1=L2		重量 (kg/节) Weight
1	XQJ-C-4-052.5	50 × 25	450		4.79
2	XQJ-C-4-105	100 × 50	600		8.02
3	XQJ-C-4-157.5	150 × 75	650		10.83
4	XQJ-C-4-2010	200 × 100	700		18.18
5	XQJ-C-4-2512.5	250 × 125	750		22.98
6	XQJ-C-4-3010	300 × 100	1000		32.19
7	XQJ-C-4-3015	300 × 150			36.29
8	XQJ-C-4-4010	400 × 100	1200		53.92
9	XQJ-C-4-4015	400 × 150			58.93
10	XQJ-C-4-4020	400 × 200			68.91
11	XQJ-C-4-5010	500 × 100	1300		74.40
12	XQJ-C-4-5015	500 × 150			77.43
13	XQJ-C-4-5020	500 × 200			82.91
14	XQJ-C-4-6010	600 × 100	1400		87.79
15	XQJ-C-4-6015	600 × 150			92.60
16	XQJ-C-4-6020	600 × 200			98.03
17	XQJ-C-4-8010	800 × 100	1600		108.43
18	XQJ-C-4-8015	800 × 150			124.65
19	XQJ-C-4-8020	800 × 200			131.63
20	XQJ-C-4-10010	1000 × 100	1800		154.00
21	XQJ-C-4-10015	1000 × 150			168.00
22	XQJ-C-4-10020	1000 × 200			180.33

XQJ-C-5A 垂直等径上弯通
Vertical equal sectional upward bend

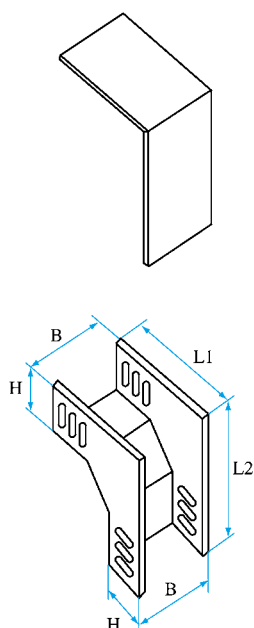


序号 No.	型号 Model	规格B×H Size B×H	长度 L ₁ =L ₂ Length L ₁ =L ₂	重量 (kg/节) Weight
1	XQJ-C-5A-052.5	50 × 25	225	3.04
2	XQJ-C-5A-105	100 × 50	300	3.51
3	XQJ-C-5A-157.5	150 × 75	325	6.55
4	XQJ-C-5A-2010	200 × 100	350	10.11
5	XQJ-C-5A-2512.5	250 × 125	375	12.54
6	XQJ-C-5A-3010	300 × 100	400	16.45
7	XQJ-C-5A-3015	300 × 150	500	19.65
8	XQJ-C-5A-4010	400 × 100	400	24.73
9	XQJ-C-5A-4015	400 × 150	500	28.98
10	XQJ-C-5A-4020	400 × 200	600	35.35
11	XQJ-C-5A-5010	500 × 100	500	34.08
12	XQJ-C-5A-5015	500 × 150	600	38.62
13	XQJ-C-5A-5020	500 × 200	700	41.71
14	XQJ-C-5A-6010	600 × 100	600	46.63
15	XQJ-C-5A-6015	600 × 150	700	50.99
16	XQJ-C-5A-6020	600 × 200	800	53.52
17	XQJ-C-5A-8010	800 × 100	600	55.58
18	XQJ-C-5A-8015	800 × 150	700	58.67
19	XQJ-C-5A-8020	800 × 200	800	62.04
20	XQJ-C-5A-10010	1000 × 100	600	65.23
21	XQJ-C-5A-10015	1000 × 150	700	76.70
22	XQJ-C-5A-10020	1000 × 200	800	88.50

XQJ-C-5B 垂直等径下弯通
Vertical equal sectional downward bend

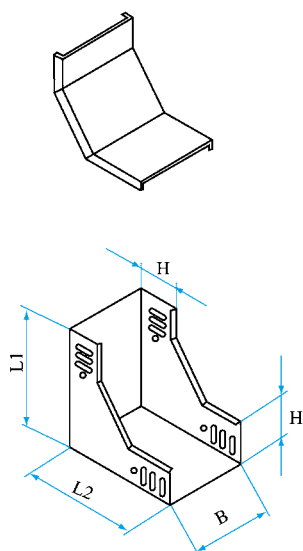


序号 No.	型号 Model	规格B×H Size B×H	长度 L ₁ =L ₂ Length L ₁ =L ₂	重量 (kg/节) Weight
1	XQJ-C-5B-052.5	50 × 25	225	3.23
2	XQJ-C-5B-105	100 × 50	300	3.45
3	XQJ-C-5B-157.5	150 × 75	325	6.70
4	XQJ-C-5B-2010	200 × 100	350	10.46
5	XQJ-C-5B-2512.5	250 × 125	375	12.86
6	XQJ-C-5B-3010	300 × 100	400	22.06
7	XQJ-C-5B-2015	300 × 150	500	24.17
8	XQJ-C-5B-4010	400 × 100	400	30.49
9	XQJ-C-5B-4015	400 × 150	500	32.73
10	XQJ-C-5B-4020	400 × 200	600	41.32
11	XQJ-C-5B-5010	500 × 100	500	40.64
12	XQJ-C-5B-5015	500 × 150	600	44.12
13	XQJ-C-5B-5020	500 × 200	700	50.39
14	XQJ-C-5B-6010	600 × 100	600	51.31
15	XQJ-C-5B-6015	600 × 150	700	54.78
16	XQJ-C-5B-6020	600 × 200	800	58.60
17	XQJ-C-5B-8010	800 × 100	600	65.19
18	XQJ-C-5B-8015	800 × 150	700	68.66
19	XQJ-C-5B-8020	800 × 200	800	72.81
20	XQJ-C-5B-10010	1000 × 100	600	80.72
21	XQJ-C-5B-10015	1000 × 150	700	89.34
22	XQJ-C-5B-10020	1000 × 200	800	102.17

XQJ-C-6 上垂直等径三通 Upward vertical equal sectional tee

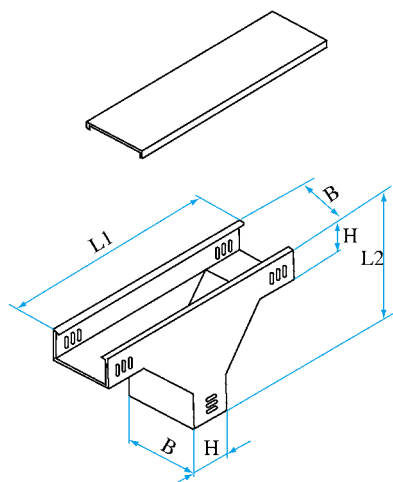

序号 No.	型号 Model	规格B×H Size B×H	长度 Length		重量 (kg/节) Weight
			L ₁	L ₂	
1	XQJ-C-6-052.5	50×25	425	225	2.99
2	XQJ-C-6-105	100×50	550	300	5.54
3	XQJ-C-6-157.5	150×75	575	325	8.84
4	XQJ-C-6-2010	200×100	600	350	13.33
5	XQJ-C-6-2512.5	250×125	625	375	16.29
6	XQJ-C-6-3010	300×100	700	400	24.10
7	XQJ-C-6-3015	300×150	850	500	26.68
8	XQJ-C-6-4010	400×100	1000	450	33.32
9	XQJ-C-6-4015	400×150	850	500	35.78
10	XQJ-C-6-4020	400×200	1000	600	48.27
11	XQJ-C-6-5010	500×100	900	500	44.41
12	XQJ-C-6-5015	500×150	950	550	48.21
13	XQJ-C-6-5020	500×200	1000	500	54.72
14	XQJ-C-6-6010	600×100	900	500	56.06
15	XQJ-C-6-6015	600×150	950	550	58.80
16	XQJ-C-6-6020	600×200	1000	600	61.05
17	XQJ-C-6-8010	800×100	900	500	67.00
18	XQJ-C-6-8015	800×150	950	550	70.79
19	XQJ-C-6-8020	800×200	1000	600	73.87
20	XQJ-C-6-10010	1000×100	900	500	76.53
21	XQJ-C-6-10015	1000×150	950	550	83.51
22	XQJ-C-6-10020	1000×200	1000	600	88.20


XQJ-C-7 下垂直等径三通 Downward vertical equal sectional tee

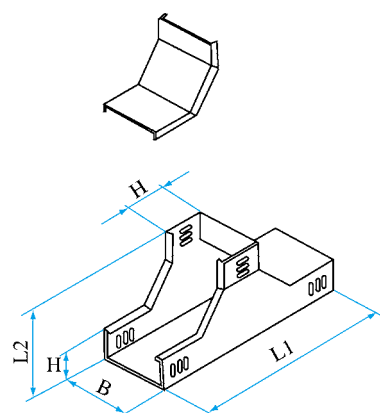

序号 No.	型号 Model	规格B×H Size B×H	长度 Length		重量 (kg/节) Weight
			L ₁	L ₂	
1	XQJ-C-7-052.5	50×25	425	225	3.40
2	XQJ-C-7-105	100×50	550	300	6.07
3	XQJ-C-7-157.5	150×75	575	325	8.78
4	XQJ-C-7-2010	200×100	600	350	13.44
5	XQJ-C-7-2512.5	250×125	625	375	16.31
6	XQJ-C-7-3010	300×100	700	400	25.31
7	XQJ-C-7-3015	300×150	850	500	26.91
8	XQJ-C-7-4010	400×100	1000	450	31.83
9	XQJ-C-7-4015	400×150	850	500	37.57
10	XQJ-C-7-4020	400×200	1000	600	49.16
11	XQJ-C-7-5010	500×100	900	500	46.64
12	XQJ-C-7-5015	500×150	950	550	50.63
13	XQJ-C-7-5020	500×200	1000	500	56.16
14	XQJ-C-7-6010	600×100	900	500	58.87
15	XQJ-C-7-6015	600×150	950	550	60.74
16	XQJ-C-7-6020	600×200	1000	600	62.94
17	XQJ-C-7-8010	800×100	900	500	66.84
18	XQJ-C-7-8015	800×150	950	550	74.79
19	XQJ-C-7-8020	800×200	1000	600	76.47
20	XQJ-C-7-10010	1000×100	900	500	82.14
21	XQJ-C-7-10015	1000×150	950	550	88.12
22	XQJ-C-7-10020	1000×200	1000	600	93.58

XQJ-C-8 上边垂直等径三通


Upward side vertical equal sectional tee

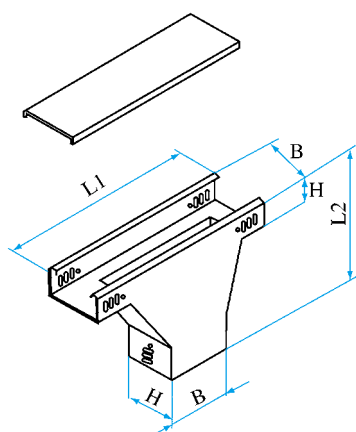

序号 No.	型号 Model	规格B×H Size B×H	长度 Length		重量 (kg/节) Weight
			L ₁	L ₂	
1	XQJ-C-8-052.5	50×25	425	225	2.99
2	XQJ-C-8-105	100×50	550	300	5.54
3	XQJ-C-8-157.5	150×75	575	325	8.84
4	XQJ-C-8-2010	200×100	700	350	13.33
5	XQJ-C-8-2512.5	250×125	750	375	16.29
6	XQJ-C-8-3010	300×100	1000	400	24.32
7	XQJ-C-8-3015	300×150	1050	500	26.68
8	XQJ-C-8-4010	400×100	1200	450	35.83
9	XQJ-C-8-4015	400×150	1200	500	35.40
10	XQJ-C-8-4020	400×200	1200	600	44.70
11	XQJ-C-8-5010	500×100	1300	500	48.55
12	XQJ-C-8-5015	500×150	1300	550	50.96
13	XQJ-C-8-5020	500×200	1300	500	54.72
14	XQJ-C-8-6010	600×100	1400	500	62.37
15	XQJ-C-8-6015	600×150	1400	550	68.14
16	XQJ-C-8-6020	600×200	1400	600	61.05
17	XQJ-C-8-8010	800×100	1600	500	69.26
18	XQJ-C-8-8015	800×150	1600	550	71.50
19	XQJ-C-8-8020	800×200	1600	600	73.85
20	XQJ-C-8-10010	1000×100	1800	500	79.22
21	XQJ-C-8-10015	1000×150	1800	550	99.09
22	XQJ-C-8-10020	1000×200	1800	600	104.36

XQJ-C-9 下边垂直等径三通


Downward side vertical equal sectional tee

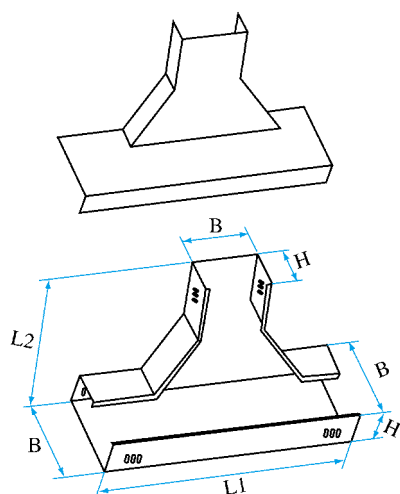

序号 No.	型号 Model	规格B×H Size B×H	长度 Length		重量 (kg/节) Weight
			L ₁	L ₂	
1	XQJ-C-9-052.5	50×25	425	225	2.79
2	XQJ-C-9-105	100×50	550	300	5.10
3	XQJ-C-9-157.5	150×75	575	325	8.00
4	XQJ-C-9-2010	200×100	700	350	15.44
5	XQJ-C-9-2512.5	250×125	750	375	24.60
6	XQJ-C-9-3010	300×100	1000	400	29.78
7	XQJ-C-9-3015	300×150	1000	500	33.52
8	XQJ-C-9-4010	400×100	1200	450	40.47
9	XQJ-C-9-4015	400×150	1200	500	44.19
10	XQJ-C-9-4020	400×200	1200	600	55.81
11	XQJ-C-9-5010	500×100	1300	500	58.52
12	XQJ-C-9-5015	500×150	1300	550	63.52
13	XQJ-C-9-5020	500×200	1300	500	68.51
14	XQJ-C-9-6010	600×100	1400	500	78.51
15	XQJ-C-9-6015	600×150	1400	550	83.82
16	XQJ-C-9-6020	600×200	1400	600	89.08
17	XQJ-C-9-8010	800×100	1600	500	111.48
18	XQJ-C-9-8015	800×150	1600	550	117.41
19	XQJ-C-9-8020	800×200	1600	600	138.03
20	XQJ-C-9-10010	1000×100	1800	500	146.11
21	XQJ-C-9-10015	1000×150	1800	550	152.88
22	XQJ-C-9-10020	1000×200	1800	600	167.67

XQJ-C-10 垂直等径左上弯道


Vertical equal sectional left upward bend

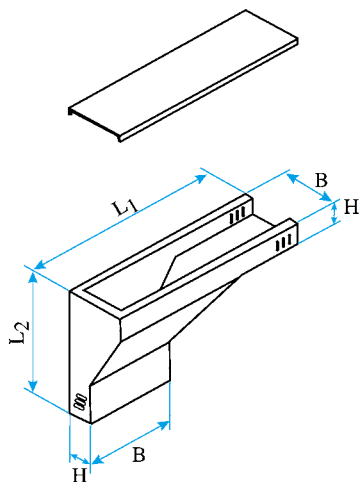

序号 No.	型号 Model	规格B×H Size B×H	长度 Length		重量 (kg/节) Weight
			L ₁	L ₂	
1	XQJ-C-10-052.5	50 × 25	250	225	3.03
2	XQJ-C-10-105	100 × 50	350	300	3.93
3	XQJ-C-10-157.5	150 × 75	400	325	7.48
4	XQJ-C-10-2010	200 × 100	450	350	11.47
5	XQJ-C-10-2512.5	250 × 125	500	375	14.79
6	XQJ-C-10-3010	300 × 100	550	350	23.83
7	XQJ-C-10-3015	300 × 150	650	500	21.76
8	XQJ-C-10-4010	400 × 100	750	450	35.05
9	XQJ-C-10-4015	400 × 150	750	500	38.31
10	XQJ-C-10-4020	400 × 200	800	600	44.33
11	XQJ-C-10-5010	500 × 100	900	600	47.55
12	XQJ-C-10-5015	500 × 150	900	650	49.48
13	XQJ-C-10-5020	500 × 200	900	700	52.27
14	XQJ-C-10-6010	600 × 100	1000	700	57.25
15	XQJ-C-10-6015	600 × 150	1000	750	61.62
16	XQJ-C-10-6020	600 × 200	1000	800	66.08
17	XQJ-C-10-8010	800 × 100	1200	900	88.01
18	XQJ-C-10-8015	800 × 150	1200	950	92.69
19	XQJ-C-10-8020	800 × 200	1200	1000	99.01
20	XQJ-C-10-10010	1000 × 100	1400	950	112.15
21	XQJ-C-10-10015	1000 × 150	1400	1000	118.50
22	XQJ-C-10-10020	1000 × 200	1400	1050	138.00

XQJ-C-11 垂直等径右上弯道


Vertical equal sectional right upward bend

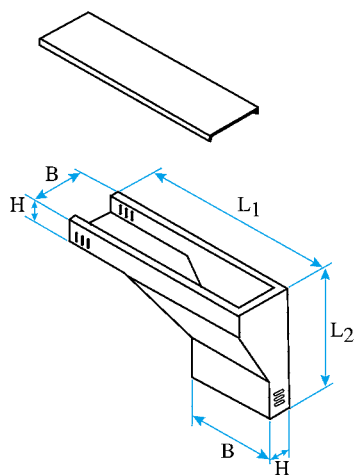

序号 No.	型号 Model	规格B×H Size B×H	长度 Length		重量 (kg/节) Weight
			L ₁	L ₂	
1	XQJ-C-11-052.5	50 × 25	250	225	3.03
2	XQJ-C-11-105	100 × 50	350	300	3.93
3	XQJ-C-11-157.5	150 × 75	400	325	7.48
4	XQJ-C-11-2010	200 × 100	450	350	11.47
5	XQJ-C-11-2512.5	250 × 125	500	375	14.79
6	XQJ-C-11-3010	300 × 100	550	350	23.83
7	XQJ-C-11-3015	300 × 150	650	500	21.76
8	XQJ-C-11-4010	400 × 100	750	450	35.05
9	XQJ-C-11-4015	400 × 150	750	500	38.31
10	XQJ-C-11-4020	400 × 200	800	600	44.33
11	XQJ-C-11-5010	500 × 100	900	600	47.55
12	XQJ-C-11-5015	500 × 150	900	650	49.48
13	XQJ-C-11-5020	500 × 200	900	700	52.27
14	XQJ-C-11-6010	600 × 100	1000	700	57.25
15	XQJ-C-11-6015	600 × 150	1000	750	61.62
16	XQJ-C-11-6020	600 × 200	1000	800	66.08
17	XQJ-C-11-8010	800 × 100	1200	900	88.01
18	XQJ-C-11-8015	800 × 150	1200	950	92.69
19	XQJ-C-11-8020	800 × 200	1200	1000	99.01
20	XQJ-C-11-10010	1000 × 100	1400	950	112.15
21	XQJ-C-11-10015	1000 × 150	1400	1000	118.50
22	XQJ-C-11-10020	1000 × 200	1400	1050	138.00

XQJ-C-12 垂直等径左下弯道


Vertical equal sectional left downward bend

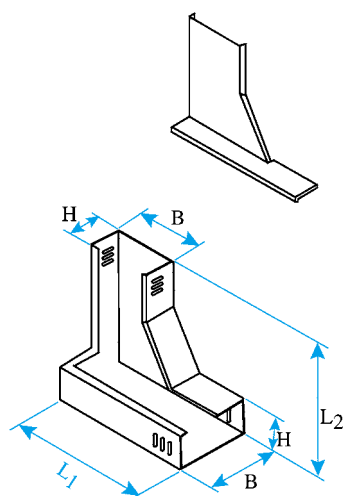

序号 No.	型号 Model	规格B×H Size B×H	长度 Length		重量 (kg/节) Weight
			L ₁	L ₂	
1	XQJ-C-12-052.5	50×25	250	225	3.03
2	XQJ-C-12-105	100×50	350	300	3.93
3	XQJ-C-12-157.5	150×75	400	325	7.48
4	XQJ-C-12-2010	200×100	450	350	11.47
5	XQJ-C-12-2512.5	250×125	500	375	14.79
6	XQJ-C-12-3010	300×100	600	400	23.83
7	XQJ-C-12-3015	300×150	650	500	21.76
8	XQJ-C-12-4010	400×100	750	400	35.05
9	XQJ-C-12-4015	400×150	750	500	38.31
10	XQJ-C-12-4020	400×200	800	600	44.33
11	XQJ-C-12-5010	500×100	800	400	47.55
12	XQJ-C-12-5015	500×150	850	500	49.48
13	XQJ-C-12-5020	500×200	900	600	52.27
14	XQJ-C-12-6010	600×100	900	400	57.25
15	XQJ-C-12-6015	600×150	950	500	61.62
16	XQJ-C-12-6020	600×200	1000	600	66.08
17	XQJ-C-12-8010	800×100	1100	400	88.01
18	XQJ-C-12-8015	800×150	1150	500	92.69
19	XQJ-C-12-8020	800×200	1200	600	99.01
20	XQJ-C-12-10010	1000×100	1400	600	112.15
21	XQJ-C-12-10015	1000×150	1400	600	118.50
22	XQJ-C-12-10020	1000×200	1400	600	138.00

XQJ-C-13 垂直等径右下弯道


Vertical equal sectional right downward bend

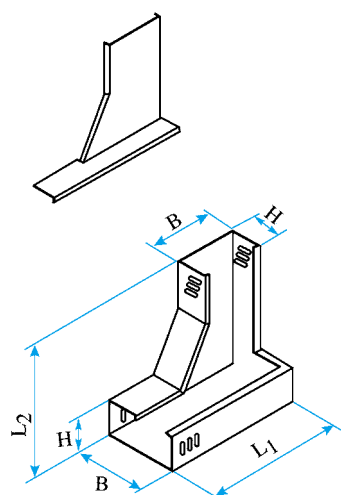

序号 No.	型号 Model	规格B×H Size B×H	长度 Length		重量 (kg/节) Weight
			L ₁	L ₂	
1	XQJ-C-13-052.5	50×25	250	225	3.03
2	XQJ-C-13-105	100×50	350	300	3.93
3	XQJ-C-13-157.5	150×75	400	325	7.48
4	XQJ-C-13-2010	200×100	450	350	11.47
5	XQJ-C-13-2512.5	250×125	500	375	14.79
6	XQJ-C-13-3010	300×100	600	400	23.83
7	XQJ-C-13-3015	300×150	650	500	21.76
8	XQJ-C-13-4010	400×100	700	400	35.05
9	XQJ-C-13-4015	400×150	750	500	38.31
10	XQJ-C-13-4020	400×200	800	600	44.33
11	XQJ-C-13-5010	500×100	800	400	47.55
12	XQJ-C-13-5015	500×150	850	500	49.48
13	XQJ-C-13-5020	500×200	900	600	52.27
14	XQJ-C-13-6010	600×100	900	400	57.25
15	XQJ-C-13-6015	600×150	950	500	61.62
16	XQJ-C-13-6020	600×200	1000	600	66.08
17	XQJ-C-13-8010	800×100	1100	400	88.01
18	XQJ-C-13-8015	800×150	1150	500	92.69
19	XQJ-C-13-8020	800×200	1200	600	99.01
20	XQJ-C-13-10010	1000×100	1400	600	112.15
21	XQJ-C-13-10015	1000×150	1400	600	118.50
22	XQJ-C-13-10020	1000×200	1400	600	138.00

XQJ-C-14 上角垂直等径三通


Upward corner vertical equal sectional tee

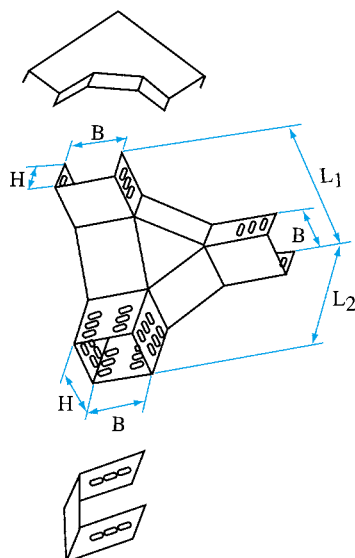

序号 No.	型号 Model	规格B×H Size B×H	长度 Length		重量 (kg/节) Weight
			L ₁	L ₂	
1	XQJ-C-14-052.5	50 × 25	250	225	3.25
2	XQJ-C-14-105	100 × 50	350	300	5.49
3	XQJ-C-14-157.5	150 × 75	400	325	10.52
4	XQJ-C-14-2010	200 × 100	450	350	15.67
5	XQJ-C-14-2512.5	250 × 125	500	375	20.50
6	XQJ-C-14-3010	300 × 100	600	400	29.78
7	XQJ-C-14-3015	300 × 150	650	500	35.08
8	XQJ-C-14-4010	400 × 100	700	400	44.07
9	XQJ-C-14-4015	400 × 150	750	500	48.43
10	XQJ-C-14-4020	400 × 200	800	600	62.99
11	XQJ-C-14-5010	500 × 100	800	400	67.00
12	XQJ-C-14-5015	500 × 150	850	500	72.00
13	XQJ-C-14-5020	500 × 200	900	600	76.93
14	XQJ-C-14-6010	600 × 100	900	400	81.17
15	XQJ-C-14-6015	600 × 150	950	500	87.00
16	XQJ-C-14-6020	600 × 200	1000	600	94.38
17	XQJ-C-14-8010	800 × 100	1100	400	104.06
18	XQJ-C-14-8015	800 × 150	1150	500	120.03
19	XQJ-C-14-8020	800 × 200	1200	600	131.92
20	XQJ-C-14-10010	1000 × 100	1250	400	144.37
21	XQJ-C-14-10015	1000 × 150	1300	500	148.56
22	XQJ-C-14-10020	1000 × 200	1350	600	161.23

XQJ-C-15 下角垂直等径三通


Downward corner vertical equal sectional tee

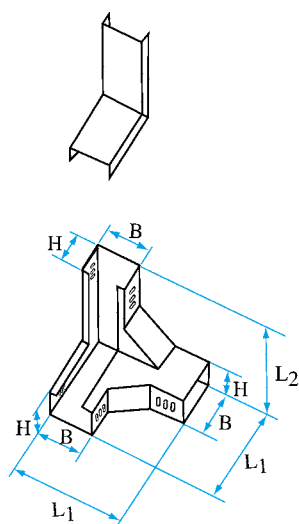

序号 No.	型号 Model	规格B×H Size B×H	长度 Length		重量 (kg/节) Weight
			L ₁	L ₂	
1	XQJ-C-15-052.5	50 × 25	250	225	3.13
2	XQJ-C-15-105	100 × 50	250	300	5.40
3	XQJ-C-15-157.5	150 × 75	400	325	9.60
4	XQJ-C-15-2010	200 × 100	450	350	15.31
5	XQJ-C-15-2512.5	250 × 125	500	375	19.24
6	XQJ-C-15-3010	300 × 100	600	400	33.08
7	XQJ-C-15-3015	300 × 150	650	500	37.24
8	XQJ-C-15-4010	400 × 100	700	400	44.97
9	XQJ-C-15-4015	400 × 150	750	500	49.10
10	XQJ-C-15-4020	400 × 200	800	600	59.03
11	XQJ-C-15-5010	500 × 100	800	400	62.00
12	XQJ-C-15-5015	500 × 150	850	500	65.02
13	XQJ-C-15-5020	500 × 200	900	600	70.41
14	XQJ-C-15-6010	600 × 100	900	400	72.40
15	XQJ-C-15-6015	600 × 150	950	500	75.11
16	XQJ-C-15-6020	600 × 200	1000	600	80.05
17	XQJ-C-15-8010	800 × 100	1000	400	96.51
18	XQJ-C-15-8015	800 × 150	1150	500	101.82
19	XQJ-C-15-8020	800 × 200	1200	600	112.26
20	XQJ-C-15-10010	1000 × 100	1250	400	124.90
21	XQJ-C-15-10015	1000 × 150	1300	500	134.54
22	XQJ-C-15-10020	1000 × 200	1350	600	146.71

XQJ-C-16 上垂直等径四通


Upward vertical equal sectional cross

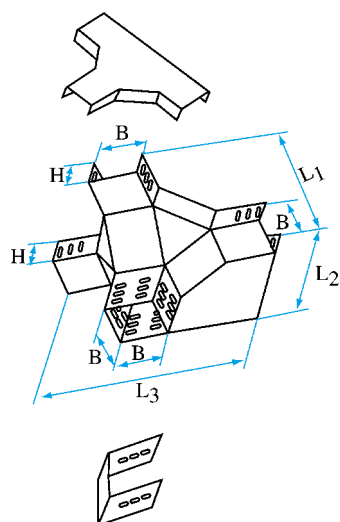

序号 No.	型号 Model	规格B×H Size B×H	长度 Length			重量 (kg/节) Weight
			L ₁	L ₂	L ₃	
1	XQJ-C-14-052.5	50×25	250	225	250	3.69
2	XQJ-C-14-105	100×50	350	300	600	6.86
3	XQJ-C-14-157.5	150×75	400	325	650	12.06
4	XQJ-C-14-2010	200×100	450	350	700	19.03
5	XQJ-C-14-2512.5	250×125	500	375	750	23.84
6	XQJ-C-14-3010	300×100	600	400	900	35.73
7	XQJ-C-14-3015	300×150	650	500	1000	40.23
8	XQJ-C-14-4010	400×100	750	450	1000	48.57
9	XQJ-C-14-4015	400×150	750	500	1100	53.03
10	XQJ-C-14-4020	400×200	800	600	1200	66.97
11	XQJ-C-14-5010	500×100	800	400	1100	70.24
12	XQJ-C-14-5015	500×150	850	500	1200	76.22
13	XQJ-C-14-5020	500×200	900	600	1300	91.32
14	XQJ-C-14-6010	600×100	900	400	1200	94.22
15	XQJ-C-14-6015	600×150	950	500	1300	98.47
16	XQJ-C-14-6020	600×200	1000	600	1400	102.71
17	XQJ-C-14-8010	800×100	1100	400	1400	120.70
18	XQJ-C-14-8015	800×150	1150	500	1500	128.21
19	XQJ-C-14-8020	800×200	1200	600	1600	133.74
20	XQJ-C-14-10010	1000×100	1500	400	1800	150.07
21	XQJ-C-14-10015	1000×150	1550	500	1800	159.20
22	XQJ-C-14-10020	1000×200	1600	600	1800	172.22

XQJ-C-1A 变径接头


Reducer

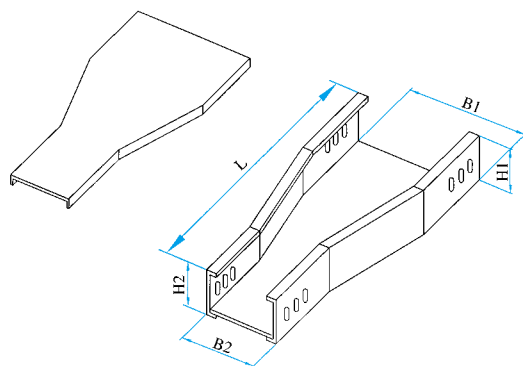

序号 No.	型号 Model	规格B ₁ ×H ₁ -B ₂ ×H ₂ SizeB ₁ ×H ₁ -B ₂ ×H ₂	长度 L Length	重量 (kg/节) Weight
1	XQJ-C-1A-2010 to 052.5	100×25-50×50	350	2.63
2	XQJ-C-1A-2010 to 1010	200×100-100×100	450	7.76
3	XQJ-C-1A-3010 to 1510	300×100-150×100	500	11.03
4	XQJ-C-1A-3015 to 2015	300×150-200×100	600	14.90
5	XQJ-C-1A-4010 to 2010	400×100-200×150	800	23.57
6	XQJ-C-1A-4015 to 3015	400×150-300×150		26.19
7	XQJ-C-1A-5010 to 3010	500×100-300×150	900	36.61
8	XQJ-C-1A-5015 to 4015	500×150-400×150		38.54
9	XQJ-C-1A-5020 to 4020	500×200-400×200		42.82
10	XQJ-C-1A-6010 to 3010	600×100-300×100	1000	43.88
11	XQJ-C-1A-6010 to 4010	600×100-400×100		46.18
12	XQJ-C-1A-6010 to 5010	600×100-500×100		51.31
13	XQJ-C-1A-6015 to 3015	600×150-500×100	1000	46.84
14	XQJ-C-1A-6015 to 4015	600×150-400×150		49.31
15	XQJ-C-1A-6015 to 5015	600×150-500×150		54.78
16	XQJ-C-1A-8010 to 4010	800×100-400×100	1200	66.89
17	XQJ-C-1A-8010 to 5010	800×100-500×100		70.41
18	XQJ-C-1A-8010 to 6010	800×100-600×100		78.23
19	XQJ-C-1A-8015 to 4015	800×150-400×150	1200	74.15
20	XQJ-C-1A-8015 to 6015	800×150-600×150		82.38
21	XQJ-C-1A-8020 to 4020	800×200-400×200	1200	87.17
22	XQJ-C-1A-8020 to 6020	800×200-600×200		96.86


XQJ-C-1B 上平异径接头

Flat top reducer




XQJ-C-1C 上平异径接头

Flat top reducer




XQJ-C-1D 下平异径接头

Flat bottom reducer



XQJ-C-1E 下平异径接头

Flat bottom reducer




序号 No.	型号 Model	规格 $B_1 \times H_1 - B_2 \times H_2$ Size $B_1 \times H_1 - B_2 \times H_2$	长度 L Length	重量 (kg/节) Weight
1	XQJ-C-1B-052.5 to 105	$50 \times 25 - 100 \times 50$	200	1.78
2	XQJ-C-1B-052.5 to 157.5	$50 \times 25 - 150 \times 75$	250	2.66
3	XQJ-C-1B-052.5 to 2010	$50 \times 25 - 200 \times 100$	300	4.85
4	XQJ-C-1B-052.5 to 2512.5	$50 \times 25 - 250 \times 125$	350	6.05
5	XQJ-C-1B-052.5 to 3015	$50 \times 25 - 300 \times 150$	500	10.88
6	XQJ-C-1B-052.5 to 4020	$50 \times 25 - 400 \times 200$	600	21.56
7	XQJ-C-1B-052.5 to 5020	$50 \times 25 - 500 \times 200$	700	28.20
8	XQJ-C-1B-052.5 to 6020	$50 \times 25 - 600 \times 200$	800	36.67
9	XQJ-C-1B-052.5 to 8020	$50 \times 25 - 800 \times 200$	1000	55.43
10	XQJ-C-1B-105 to 457.5	$100 \times 50 - 150 \times 75$	250	3.10
11	XQJ-C-1B-105 to 2010	$100 \times 50 - 200 \times 100$	300	5.00
12	XQJ-C-1B-105 to 12.5	$100 \times 50 - 250 \times 125$	350	6.95
13	XQJ-C-1B-105 to 3015	$100 \times 50 - 300 \times 150$	500	11.85
14	XQJ-C-1B-105 to 4020	$100 \times 50 - 400 \times 200$	600	26.78
15	XQJ-C-1B-105 to 5020	$100 \times 50 - 500 \times 200$	700	33.41
16	XQJ-C-1B-105 to 6020	$100 \times 50 - 600 \times 200$	800	40.29
17	XQJ-C-1B-105 to 8020	$100 \times 50 - 800 \times 200$	1000	54.13
18	XQJ-C-1B-157.5 to 2010	$150 \times 75 - 200 \times 100$	250	4.41
19	XQJ-C-1B-157.5 to 2512.5	$150 \times 75 - 250 \times 125$	300	6.52
20	XQJ-C-1B-157.5 to 3015	$150 \times 75 - 300 \times 150$	400	10.84
21	XQJ-C-1B-157.5 to 4020	$150 \times 75 - 400 \times 200$	550	23.99
22	XQJ-C-1B-157.5 to 5020	$150 \times 75 - 500 \times 200$	650	29.83
23	XQJ-C-1B-157.5 to 6020	$150 \times 75 - 600 \times 200$	750	37.61
24	XQJ-C-1B-157.5 to 8020	$150 \times 75 - 800 \times 200$	950	57.77
25	XQJ-C-1B-2010 to 2512.5	$200 \times 100 - 250 \times 125$	250	5.91
26	XQJ-C-1B-2010 to 3015	$200 \times 100 - 300 \times 150$	400	10.36
27	XQJ-C-1B-2010 to 4020	$200 \times 100 - 400 \times 200$	500	20.78
28	XQJ-C-1B-2010 to 5020	$200 \times 100 - 500 \times 200$	600	27.14
29	XQJ-C-1B-2010 to 6020	$200 \times 100 - 600 \times 200$	700	38.16
30	XQJ-C-1B-2010 to 8020	$200 \times 100 - 800 \times 200$	900	53.80
31	XQJ-C-1B-2512.5 to 3015	$250 \times 125 - 300 \times 150$	350	9.70
32	XQJ-C-1B-2512.5 to 4020	$250 \times 125 - 400 \times 200$	450	18.48
33	XQJ-C-1B-2512.5 to 5020	$250 \times 125 - 500 \times 200$	550	25.54
34	XQJ-C-1B-2512.5 to 6020	$250 \times 125 - 600 \times 200$	650	40.93
35	XQJ-C-1B-2512.5 to 8020	$250 \times 125 - 800 \times 200$	850	54.87
36	XQJ-C-1B-3015 to 4020	$300 \times 150 - 400 \times 200$	500	22.09
37	XQJ-C-1B-3015 to 5020	$300 \times 150 - 500 \times 200$	600	29.34
38	XQJ-C-1B-3015 to 6020	$300 \times 150 - 600 \times 200$	700	38.04
39	XQJ-C-1B-3015 to 8020	$300 \times 150 - 800 \times 200$	900	51.33
40	XQJ-C-1B-4020 to 5020	$400 \times 200 - 500 \times 200$	500	58.98
41	XQJ-C-1B-4020 to 6020	$400 \times 200 - 600 \times 200$	600	80.25
42	XQJ-C-1B-4020 to 8020	$400 \times 200 - 800 \times 200$	800	97.55
43	XQJ-C-1B-5020 to 6020	$500 \times 200 - 600 \times 200$	500	70.69
44	XQJ-C-1B-5020 to 8020	$500 \times 200 - 800 \times 200$	700	107.49
45	XQJ-C-1B-6020 to 8020	$600 \times 200 - 800 \times 200$	600	97.31

注：C-1C,C-1D,C-1E 型径接头的重量同C-1B型


Note: The weight of C-1C, C-1D, C-1E type reducer equal C-1B type

XQJ-ZH-01A 型组合式桥架
Model XQJ-ZH-01A combined Cable support

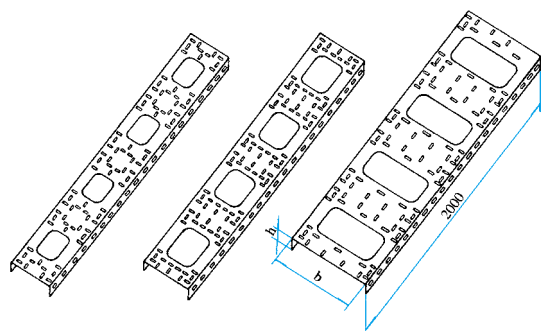


型号 Model	规格b×h Size	重量 kg Weight
ZH-01A-100	100×25	6.74
ZH-01A-150	150×25	8.99
ZH-01A-200	200×25	11.24

XQJ-ZH-01B 型组合式桥架
Model XQJ-ZH-01B combined Cable support

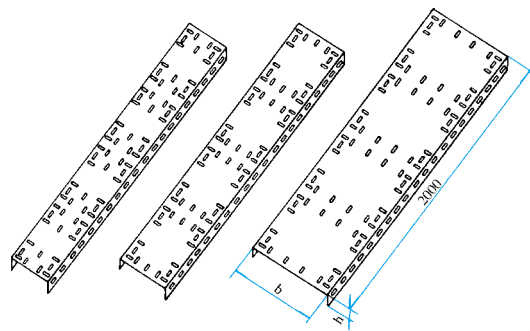

型号 Model	规格b×h Size	重量 kg Weight
ZH-01B-100	100×25	6.74
ZH-01B-150	150×25	8.99
ZH-01B-200	200×25	11.24

XQJ-ZH-02A、B 型配线桥架
Model XQJ-ZH-02A、B Model Cabling Support

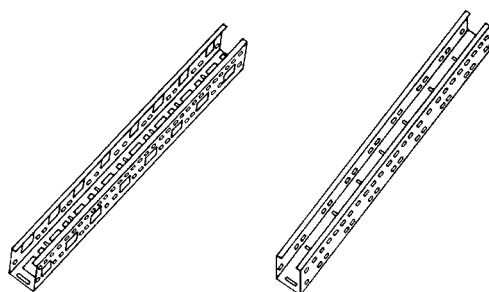


A型 A Type

B型 B Type

型号 Model	规格 Size	支撑距离“×”时电缆负载能力 Load Capacity for different spans						重量 kg Weight
		1.5m	2m	2.5m	3m	3.5m	4m	
ZH-02A	50×50	50	30	19	9	5	3	8.53
ZH-02B	50×50	60	33	18	10	6	4	8.53

XQJ-ZH-03A、B 型配线桥架
Model XQJ-ZH-03A、B Model Cabling Support

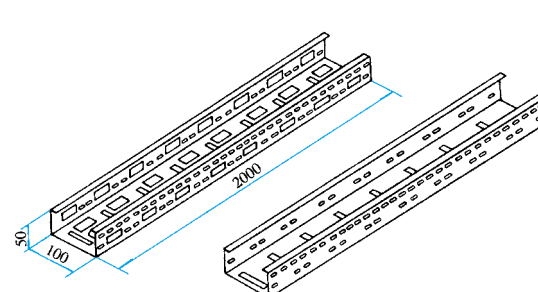


A型 A Type

B型 B Type


型号 Model	规格 Size	支撑距离“×”时电缆负载能力 Load Capacity for different spans						重量 kg Weight
		1.5m	2m	2.5m	3m	3.5m	4m	
ZH-03A	100×50	67	38	20	12	7	5	10.78
ZH-03B	100×50	83	50	28	16	10	7	10.78

XQJ-ZH-04 型配线桥架
Model XQJ-ZH-04 Cabling Support




型号 Model	规格 Size	重量 kg Weight	备注 Remarks
ZH-04	50×25	4.50	

XQJ-ZH-05 型连接板
Model XQJ-ZH-05 Connection plate









型号 Model	规格 Size	参考价 元/只 Reference price yuan/piece	备注 Remarks
ZH-05	25×25		

XQJ-ZH-06 型连接片
Model XQJ-ZH-06 connection piece




型号 Model	规格 Size	参考价 元/只 Reference price yuan/piece	备注 Remarks
ZH-06	24×70		

XQJ-ZH 型组合式电缆桥架组合形式及配套件数表 Possible configurations and required no. of elements for Model XQJ-ZH combined cable support


序号 NO.	形式 Model	底板与侧板的配制图 Bottom and side plates		底板宽(mm) Bottom Width	底板 h (数量) No. of Side plates			侧边数量 No. of side plates	连接螺栓 Connection bolts		备注 Remarks
					100	150	200		规格 Size	量/m Quantity	
1001 1002 1003	A			103 153 203	1	1	1	2 2 2	M6 × 12	6 (14)	
1004 1005				303 403		2	2	2 2		9 (19)	
1006 1007				503 603		2	1 3	2 2		12 (24)	
2008 2009 2010	B			205 305 405	2	2	2	3 3 3	M6 × 12	9 (21)	
2011 2012				505 605		2	1 3	3 3		12 (26)	
2013				805			4	3		16(31)	
3014 3015 3016	C			306 456 606	3	3		4 4 4	M6 × 12	12 (28)	
3017				806			4	4		15(33)	
3018				1006			5	4		18(38)	
3019				1206			6	4		21(43)	
4020 4021 4022	D			153 203 253	1	1	1	4 4 4	M6 × 15	16 (24)	
4023 4024				353 453		2		4 4		20 (30)	
5025 5026 5027	E			256 356 456	2	2	2	6 6 6	M6 × 15	24 (36)	
5028 5029				656 856		4	4	6 6		32 (48)	

XQJ-ZH-07 型连接板
Model XQJ-ZH-07 connection plate




型号 Model	参考价元/只 Reference price yuan/piece	备注 Remarks
ZH-07		

XQJ-ZH-11 型扣锁
Model XQJ-ZH-11 lock




型号 Model	参考价元/只 Reference price yuan/piece	备注 Remarks
ZH-11		

XQJ-ZH-08 型管接头
Model XQJ-ZH-08 pipe connector




配管 Connected Pipe	安装尺寸L×H Size of Installation
G1/2", G3/4", G1", G1 1/2", G2"	122 × 74, 122 × 124, 122 × 174

XQJ-ZH-09 U 型管卡
Model XQJ-ZH-09 U pipe clamp




规格 □×L Size	配用引管线径 Cable diameter
22 × 31, 27 × 34, 34 × 37, 49 × 45, 61 × 50, 76 × 57, 89 × 64	G1/2", G3/4", G1", G1 1/2", G2", G2 1/2", G3"

XQJ-ZH-10 型盖板
Model XQJ-ZH-10 cover plate

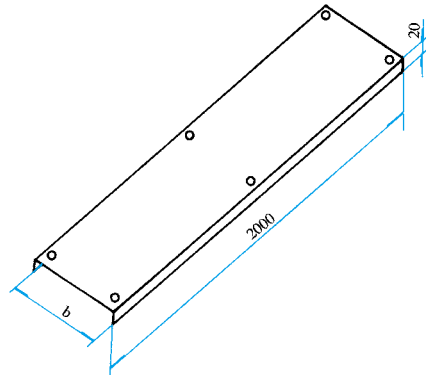


型号 Model	b (mm)	重量 kg Weight	备注 Remarks
ZH-10-50	55	3.39	订货时请注明配套使用的组合式电缆桥架的组合形式: A、B、C、D、E b宽度根据组合形式: A型加3mm、B、C型加6mm、D型加56mm、E型加59mm Please give clear indication of the combination forms: A.B.C.D.E.b width: Plus 3mm for Type A Plus 6mm for Type B Plus 56mm for Type D Plus 59mm for Type E
ZH-10-100	105	5.26	
ZH-10-150	155	7.21	
ZH-10-200	205	9.01	
ZH-10-300	305	13.04	
ZH-10-400	405	21.09	
ZH-10-500	505	25.86	
ZH-10-600	605	36.78	
ZH-10-700	705	46.11	
ZH-10-800	805	52.47	

XQJ-DJ-TI-01型梯级式大跨距汇线桥架
Stair Large-span Bridge Frame

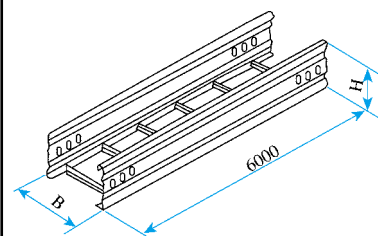


型号 Model	H (mm)	B (mm)	重量 kg Weight	备注 Remarks
DJ-TI-01-102	100	200	64.10	单排 连接孔
DJ-TI-01-103		300	68.08	
DJ-TI-01-104		400	76.10	
DJ-TI-01-105		500	88.89	
DJ-TI-01-106		600	106.11	
DJ-TI-01-108		800	175.25	
DJ-TI-01-152	150	200	99.04	双排 连接孔
DJ-TI-01-153		300	102.28	
DJ-TI-01-154		400	105.53	
DJ-TI-01-155		500	110.41	
DJ-TI-01-156		600	128.10	
DJ-TI-01-158		800	159.73	
DJ-TI-01-202	200	200	121.80	双排 连接孔
DJ-TI-01-203		300	125.06	
DJ-TI-01-204		400	128.31	
DJ-TI-01-205		500	133.16	
DJ-TI-01-206		600	144.54	
DJ-TI-01-208		800	179.48	

XQJ-DJ-TII-01型梯级式大跨距汇线桥架
Stair Large-span Bridge Frame

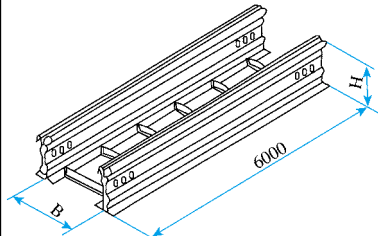


型号 Model	H (mm)	B (mm)	重量 kg Weight	备注 Remarks
DJ-TII-01-102	100	200	126.31	单排 连接孔
DJ-TII-01-103		300	129.87	
DJ-TII-01-104		400	145.26	
DJ-TII-01-105		500	153.03	
DJ-TII-01-106		600	160.78	
DJ-TII-01-108		800	217.91	
DJ-TII-01-152	150	200	164.20	双排 连接孔
DJ-TII-01-153		300	168.28	
DJ-TII-01-154		400	186.48	
DJ-TII-01-155		500	198.94	
DJ-TII-01-156		600	209.02	
DJ-TII-01-158		800	283.29	
DJ-TII-01-202	200	200	202.09	双排 连接孔
DJ-TII-01-203		300	207.17	
DJ-TII-01-204		400	232.45	
DJ-TII-01-205		500	244.84	
DJ-TII-01-206		600	257.25	
DJ-TII-01-208		800	348.66	

XQJ-DJ-PI-01型托盘式大跨距汇线桥架
Stair Large-span Bridge Frame

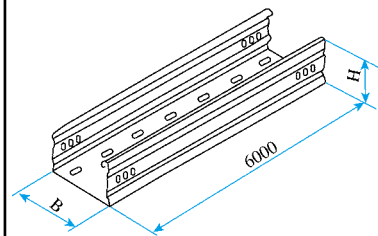


型号 Model	H (mm)	B (mm)	重量 kg Weight	备注 Remarks
DJ-PI-01-102	100	200	93.02	单排 连接孔
DJ-PI-01-103		300	111.17	
DJ-PI-01-104		400	158.66	
DJ-PI-01-105		500	196.43	
DJ-PI-01-106		600	231.06	
DJ-PI-01-108		800	323.00	
DJ-PI-01-152	150	200	134.56	双排 连接孔
DJ-PI-01-153		300	156.36	
DJ-PI-01-154		400	222.70	
DJ-PI-01-155		500	249.98	
DJ-PI-01-156		600	280.05	
DJ-PI-01-158		800	346.70	
DJ-PI-01-202	200	200	157.35	双排 连接孔
DJ-PI-01-203		300	179.13	
DJ-PI-01-204		400	241.13	
DJ-PI-01-205		500	267.30	
DJ-PI-01-206		600	313.51	
DJ-PI-01-208		800	379.18	

XQJ-DJ-PII-01型托盘式大跨距汇线桥架
Stair Large-span Bridge Frame

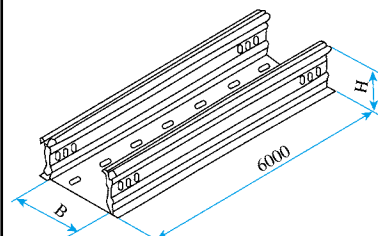


型号 Model	H (mm)	B (mm)	重量 kg Weight	备注 Remarks
DJ-PII-01-102	100	200	159.15	单排 连接孔
DJ-PII-01-103		300	179.34	
DJ-PII-01-104		400	244.09	
DJ-PII-01-105		500	270.01	
DJ-PII-01-106		600	295.79	
DJ-PII-01-108		800	389.96	
DJ-PII-01-152	150	200	206.88	双排 连接孔
DJ-PII-01-153		300	233.97	
DJ-PII-01-154		400	317.41	
DJ-PII-01-155		500	351.02	
DJ-PII-01-156		600	384.54	
DJ-PII-01-158		800	506.96	
DJ-PII-01-202	200	200	254.63	双排 连接孔
DJ-PII-01-203		300	287.97	
DJ-PII-01-204		400	390.65	
DJ-PII-01-205		500	432.02	
DJ-PII-01-206		600	473.27	
DJ-PII-01-208		800	624.00	

XQJ-DJ-CI-01型槽式大跨距汇线桥架
Stair Large-span Bridge Frame

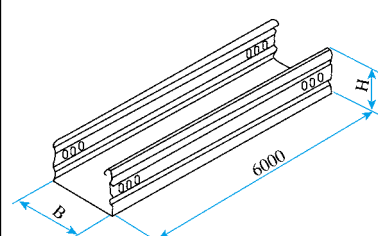

型号 Model	H (mm)	B (mm)	重量 kg Weight	备注 Remarks
DJ-CI-01-102	100	200	102.30	单排 连接孔
DJ-CI-01-103		300	122.27	
DJ-CI-01-104		400	166.41	
DJ-CI-01-105		500	200.73	
DJ-CI-01-106		600	234.78	
DJ-CI-01-108		800	335.98	
DJ-CI-01-152	150	200	148.00	双排 连接孔
DJ-CI-01-153		300	171.99	
DJ-CI-01-154		400	225.38	
DJ-CI-01-155		500	253.00	
DJ-CI-01-156		600	292.69	
DJ-CI-01-158		800	355.90	
DJ-CI-01-202	200	200	173.03	双排 连接孔
DJ-CI-01-203		300	197.04	
DJ-CI-01-204		400	254.18	
DJ-CI-01-205		500	281.76	
DJ-CI-01-206		600	322.18	
DJ-CI-01-208		800	387.26	

XQJ-DJ-CII-01型槽式大跨距汇线桥架
Stair Large-span Bridge Frame

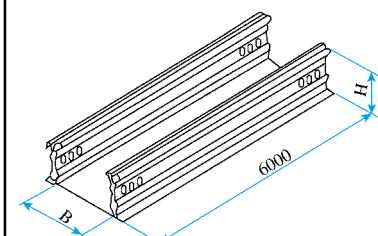


型号 Model	H (mm)	B (mm)	重量 kg Weight	备注 Remarks
DJ-CII-01-102	100	200	167.62	单排 连接孔
DJ-CII-01-103		300	182.44	
DJ-CII-01-104		400	268.05	
DJ-CII-01-105		500	289.84	
DJ-CII-01-106		600	314.87	
DJ-CII-01-108		800	417.01	
DJ-CII-01-152	150	200	219.82	双排 连接孔
DJ-CII-01-153		300	255.42	
DJ-CII-01-154		400	375.27	
DJ-CII-01-155		500	405.76	
DJ-CII-01-156		600	440.81	
DJ-CII-01-158		800	583.74	
DJ-CII-01-202	200	200	261.83	双排 连接孔
DJ-CII-01-203		300	291.89	
DJ-CII-01-204		400	428.25	
DJ-CII-01-205		500	463.73	
DJ-CII-01-206		600	503.72	
DJ-CII-01-208		800	667.21	

HQJ-铝合金桥架

HQJ-铝合金桥架是我公司参照美国NEMAB标准NOVEI-1979《CABLE TRAY SYSTEMS》自行研制开发的，具有结构简单、式样新颖，耐腐蚀、使用寿命长、安装维护方便，不需保养等优点，能够适用于广泛的环境条件，在沿海盐雾地区、高温、高湿和有腐蚀性的环境中使用，更能显示出它的抗腐蚀性能。


HQJ-Aluminum alloy cable tray is designed and manufactured by our company referring to cable tray system of American standard NEMAB NOVEI-1979《CABLE TRAY SYSTEMS》. It has many advantages such as simple structure, new style, anti-corrosion, long life, convenient erection, no needs maintenance, it can be used at any environment place, especially it can show its anti-corrosive performance when used in salty and foggy coastal areas and highly-humid and corrosive environment.

HQJ-01AT 型铝合金梯级桥架
HQJ-01AT Al alloy ladder type cable support

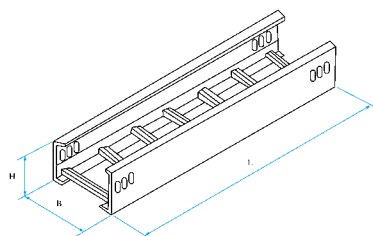


型号 Model	H (mm)	B (mm)	L (mm)	单重 wkg/m	备注 Remarks
HQJ-01AT-62	60	200	2000	5.32	
HQJ-01AT-63		300		5.72	
HQJ-01AT-64		400		6.41	
HQJ-01AT-65		500		7.21	
HQJ-01AT-66		600		8.59	
HQJ-01AT-68		800		9.81	
HQJ-01AT-102	100	200	2000	6.15	
HQJ-01AT-103		300		6.52	
HQJ-01AT-104		400		7.63	
HQJ-01AT-105		500		8.59	
HQJ-01AT-106		600		10.18	
HQJ-01AT-108		800		11.45	
HQJ-01AT-152	150	200	2000	7.26	
HQJ-01AT-153		300		8.00	
HQJ-01AT-154		400		8.80	
HQJ-01AT-155		500		9.65	
HQJ-01AT-156		600		11.24	
HQJ-01AT-158		800		13.14	

HQJ-01AP 型铝合金托盘桥架
HQJ-01AP Al alloy tray type cable support

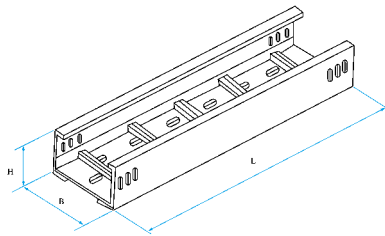


型号 Model	H (mm)	B (mm)	L (mm)	单重 wkg/m	备注 Remarks
HQJ-01AP-62	60	200	2000	6.15	B尺寸在400以上的加用梯级加强节
HQJ-01AP-63		300		7.99	
HQJ-01AP-64		400		9.22	
HQJ-01AP-65		500		10.39	
HQJ-01AP-66		600		13.14	
HQJ-01AP-68		800		14.95	
HQJ-01AP-102	100	200	2000	7.10	Ladder rein forcing section is provided for those B with dimension over 400
HQJ-01AP-103		300		9.01	
HQJ-01AP-104		400		10.28	
HQJ-01AP-105		500		11.24	
HQJ-01AP-106		600		14.20	
HQJ-01AP-108		800		16.11	
HQJ-01AP-152	150	200	2000	8.06	
HQJ-01AP-153		300		9.96	
HQJ-01AP-154		400		11.24	
HQJ-01AP-155		500		12.61	
HQJ-01AP-156		600		14.42	
HQJ-01AP-158		800		17.07	

HQJ-01AC 型铝合金槽式桥架
HQJ-01AC Al alloy channel type cable support

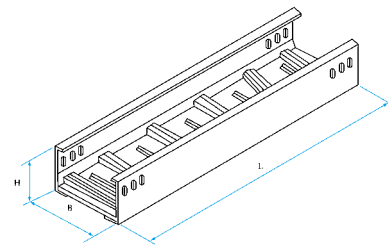


型号 Model	H (mm)	B (mm)	L (mm)	单重 wkg/m	备注 Remarks
HQJ-01AC-62	60	200	2000	6.25	B尺寸在400以上的加用梯级加强节
HQJ-01AC-63		300		8.27	
HQJ-01AC-64		400		9.22	
HQJ-01AC-65		500		10.49	
HQJ-01AC-66		600		13.46	
HQJ-01AC-68		800		15.26	
HQJ-01AC-102	100	200	2000	7.21	Ladder rein forcing section is provided for those B with dimension over 400
HQJ-01AC-103		300		9.01	
HQJ-01AC-104		400		10.28	
HQJ-01AC-105		500		11.45	
HQJ-01AC-106		600		14.52	
HQJ-01AC-108		800		16.32	
HQJ-01AC-152	150	200	2000	8.16	
HQJ-01AC-153		300		10.39	
HQJ-01AC-154		400		11.34	
HQJ-01AC-155		500		12.72	
HQJ-01AC-156		600		14.73	
HQJ-01AC-158		800		17.38	

HQJ-02AT、P、C 型铝合金水平弯通桥架
HQJ-02AT、P、C Al alloy horizontal bend

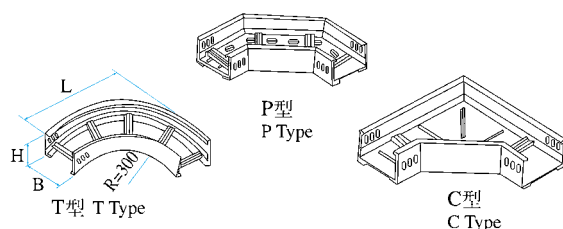


型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg) Weight		
				T 型Type	P 型Type	C 型Type
T P C 型	60	200	600	5.51	5.72	6.36
		300	700	6.78	8.48	9.96
		400	800	7.95	11.24	13.25
		500	900	8.90	14.20	17.60
		600	1000	11.45	20.35	23.64
		800	1200	14.73	24.49	29.79
T P C 型	100	200	700	6.47	6.47	7.95
		300	800	7.74	9.33	11.45
		400	900	9.01	12.08	14.73
		500	1000	10.18	15.26	18.02
		600	1100	12.93	20.25	22.58
		800	1300	17.28	25.76	28.73
T P C 型	150	200	700	8.27	8.69	10.81
		300	800	9.75	11.98	14.31
		400	900	11.13	15.05	17.81
		500	1000	12.51	18.34	21.31
		600	1100	15.16	26.39	29.57
		800	1300	17.60	30.00	31.91

HQJ-03AT、P、C 型铝合金水平三通桥架
HQJ-03AT、P、C Al alloy horizontal tee

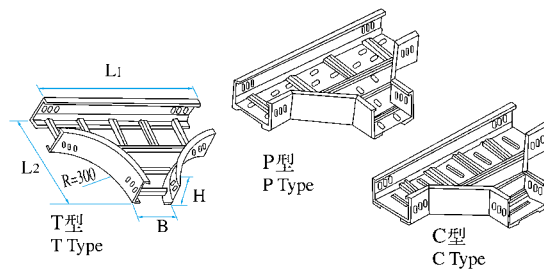


型号 Model	H (mm)	B (mm)	L1 (mm)	L2 (mm)	单件重量 (wkg) Weight	
					T 型Type	P、C 型Type
T P C 型	60	200	1000	600	10.39	11.53
		300	1100	700	12.19	15.26
		400	1200	800	13.78	18.34
		500	1300	900	15.79	21.52
		600	1400	1000	19.08	28.94
		800	1600	1200	21.31	31.91
T P C 型	100	200	1200	700	11.55	13.57
		300	1300	800	13.46	17.49
		400	1400	900	15.26	20.67
		500	1500	1000	16.96	24.17
		600	1600	1100	20.56	31.80
		800	1800	1300	23.64	36.15
T P C 型	150	200	1200	700	14.73	18.87
		300	1300	800	16.54	23.43
		400	1400	900	18.44	27.24
		500	1500	1000	20.25	31.38
		600	1600	1100	23.85	39.86
		800	1800	1300	27.14	46.43

HQJ-04AT、P、C 型铝合金水平四通桥架
HQJ-04AT、P、C Al alloy horizontal cross support

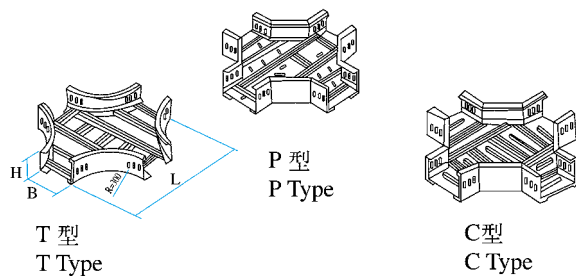


	型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg)		备注 Remarks
					T 型Type	P、C 型Type	
T P C 型	HQJ-04A-62	60	200	1000	14.73	11.77	P、C 型B尺寸在400以上的加用梯级加强节 Ladder rein forcing section is provided for those B with dimension over 400
	HQJ-04A-63		300	1100	17.17	15.69	
	HQJ-04A-64		400	1200	19.40	18.66	
	HQJ-04A-65		500	1300	21.31	21.94	
	HQJ-04A-66		600	1400	25.76	28.94	
	HQJ-04A-68		800	1600	29.79	32.12	
T P C 型	HQJ-04A-102	100	200	1200	16.01	12.83	
	HQJ-04A-103		300	1300	18.34	16.64	
	HQJ-04A-104		400	1400	20.46	19.61	
	HQJ-04A-105		500	1500	22.68	22.90	
	HQJ-04A-106		600	1600	27.03	30.00	
	HQJ-04A-108		800	1800	29.79	31.91	
T P C 型	HQJ-04A-152	150	200	1200	20.25	17.17	
	HQJ-04A-153		300	1300	22.47	21.62	
	HQJ-04A-154		400	1400	24.49	25.02	
	HQJ-04A-155		500	1500	26.82	28.73	
	HQJ-04A-156		600	1600	31.16	36.57	
	HQJ-04A-158		800	1800	34.03	40.49	

HQJ-05AT、P、C 型铝合金垂直下弯通
HQJ-05AT、P、C Al alloy vertical downward bend

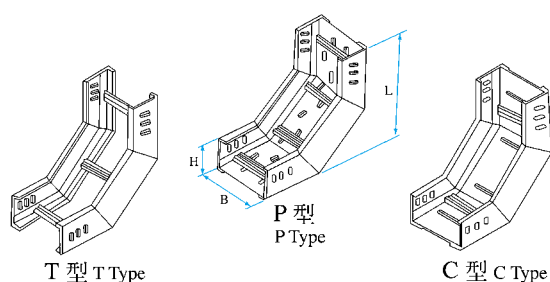


	型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg)		备注 Remarks
					T 型Type	P、C 型Type	
T P C 型	HQJ-05A-62	60	200	360	4.03	4.35	P、C 型B尺寸在400以上的加用梯级加强节 Ladder rein forcing section is provided for those B with dimension over 400
	HQJ-05A-63		300		4.35	5.51	
	HQJ-05A-64		400		5.30	6.68	
	HQJ-05A-65		500		6.57	8.06	
	HQJ-05A-66		600		7.21	9.43	
	HQJ-05A-68		800		8.06	10.71	
T P C 型	HQJ-05A-102	100	200	400	4.35	5.09	
	HQJ-05A-103		300		5.30	6.47	
	HQJ-05A-104		400		6.47	7.42	
	HQJ-05A-105		500		6.78	8.48	
	HQJ-05A-106		600		7.42	10.39	
	HQJ-05A-108		800		8.59	11.87	
T P C 型	HQJ-05A-152	150	200	600	6.36	7.84	
	HQJ-05A-153		300		6.89	9.75	
	HQJ-05A-154		400		7.53	11.02	
	HQJ-05A-155		500		8.16	12.40	
	HQJ-05A-156		600		9.33	15.05	
	HQJ-05A-158		800		10.71	17.38	

HQJ-06AT、P、C 型铝合金垂直上弯通
HQJ-06AT、P、C Al alloy vertical upward bend

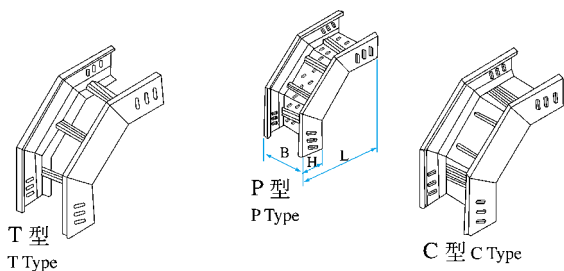


	型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg)		备注 Remarks
					T 型Type	P、C 型Type	
T P C 型	HQJ-06A-62	60	200	360	4.03	4.35	P、C 型B尺寸在400以上的加用梯级加强节 Ladder rein forcing section is provided for those B with dimension over 400
	HQJ-06A-63		300		4.35	5.51	
	HQJ-06A-64		400		5.30	6.68	
	HQJ-06A-65		500		6.57	8.06	
	HQJ-06A-66		600		7.21	9.43	
	HQJ-06A-68		800		8.06	10.71	
T P C 型	HQJ-06A-102	100	200	400	4.35	5.09	
	HQJ-06A-103		300		5.30	6.47	
	HQJ-06A-104		400		6.47	7.42	
	HQJ-06A-105		500		6.78	8.48	
	HQJ-06A-106		600		7.42	10.39	
	HQJ-06A-108		800		8.59	11.87	
T P C 型	HQJ-06A-152	150	200	600	6.36	7.84	
	HQJ-06A-153		300		6.89	9.75	
	HQJ-06A-154		400		7.53	11.02	
	HQJ-06A-155		500		8.16	12.40	
	HQJ-06A-156		600		9.33	15.05	
	HQJ-06A-158		800		10.71	17.38	

HQJ-07AT、P、C 型铝合金转动弯通
HQJ-07AT、P、C Al alloy rotatable bend

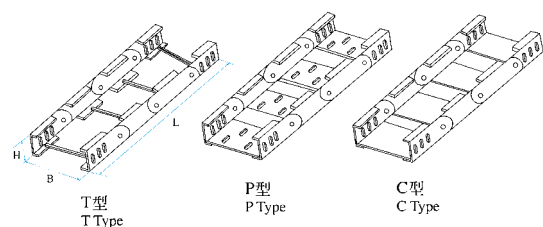


	型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg)		备注 Remarks
					T 型Type	P、C 型Type	
T P C 型	HQJ-07A-62	60	200	600	5.72	6.36	
	HQJ-07A-63		300		6.57	7.63	
	HQJ-07A-64		400		7.31	8.59	
	HQJ-07A-65		500		8.16	10.07	
	HQJ-07A-66		600		9.75	11.74	
	HQJ-07A-68		800		12.19	15.69	
T P C 型	HQJ-07A-102	100	200	800	7.10	7.63	
	HQJ-07A-103		300		7.84	9.75	
	HQJ-07A-104		400		8.69	10.81	
	HQJ-07A-105		500		9.54	12.40	
	HQJ-07A-106		600		11.13	14.63	
	HQJ-07A-108		800		12.83	16.32	
T P C 型	HQJ-07A-152	150	200	1200	9.75	12.30	
	HQJ-07A-153		300		10.60	13.78	
	HQJ-07A-154		400		11.45	14.20	
	HQJ-07A-155		500		12.19	15.90	
	HQJ-07A-156		600		13.78	17.91	
	HQJ-07A-158		800		16.01	20.46	

HQJ-01CT 型铝合金梯级桥架
HQJ-01CT Al alloy ladder type cable support




型号 Model	H (mm)	B (mm)	L (mm)	单重 wkg/m	备注 Remarks
HQJ-01CT-102	112	200	2000	5.94	
HQJ-01CT-103		300	3000	6.78	
HQJ-01CT-104		400	4000	7.63	
HQJ-01CT-105		500	5000	8.48	
HQJ-01CT-106		600	6000	10.07	
HQJ-01CT-108		800	6000	11.66	
HQJ-01CT-152	162	200	2000	7.53	
HQJ-01CT-153		300	3000	8.37	
HQJ-01CT-154		400	4000	9.17	
HQJ-01CT-155		500	5000	9.96	
HQJ-01CT-156		600	5000	11.66	
HQJ-01CT-158		800	6000	13.36	
HQJ-01CT-202	212	200	2000	9.86	
HQJ-01CT-203		300	3000	10.76	
HQJ-01CT-204		400	4000	11.66	
HQJ-01CT-205		500	4000	12.30	
HQJ-01CT-206		600	5000	13.78	
HQJ-01CT-208		800	6000	16.32	

HQJ-01CP 型铝合金托盘桥架
HQJ-01CP Al alloy tray type cable support

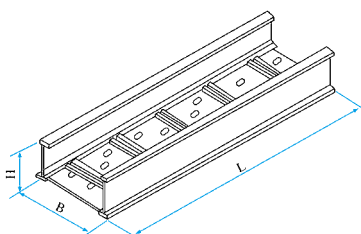


型号 Model	H (mm)	B (mm)	L (mm)	单重 wkg/m	备注 Remarks
HQJ-01CP-102	112	200	2000	6.99	B尺寸在400以上的加用梯级加强节
HQJ-01CP-103		300	3000	9.28	
HQJ-01CP-104		400	4000	10.60	
HQJ-01CP-105		500	5000	11.87	
HQJ-01CP-106		600	6000	14.52	
HQJ-01CP-108		800	6000	17.17	
HQJ-01CP-152	162	200	2000	8.90	Ladder rein forcing section is provided for those B with dimension over 400
HQJ-01CP-153		300	3000	10.81	
HQJ-01CP-154		400	4000	12.08	
HQJ-01CP-155		500	5000	13.41	
HQJ-01CP-156		600	5000	16.01	
HQJ-01CP-158		800	6000	18.66	
HQJ-01CP-202	212	200	2000	11.13	
HQJ-01CP-203		300	3000	13.14	
HQJ-01CP-204		400	4000	14.42	
HQJ-01CP-205		500	4000	15.69	
HQJ-01CP-206		600	5000	18.29	
HQJ-01CP-208		800	6000	20.78	

HQJ-01CC 型铝合金槽式桥架
HQJ-01CC Al alloy Channel type cable support

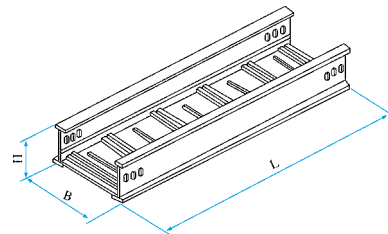


型号 Model	H (mm)	B (mm)	L (mm)	单重 wkg/m	备注 Remarks
HQJ-01CC-102	112	200	2000	6.20	B尺寸在400以上的加用梯级加强节
HQJ-01CC-103		300	3000	7.42	
HQJ-01CC-104		400	4000	9.33	
HQJ-01CC-105		500	5000	11.87	
HQJ-01CC-106		600	5000	14.47	
HQJ-01CC-108		800	6000	17.01	
HQJ-01CC-152	162	200	2000	8.90	Ladder rein forcing section is provided for those B with dimension over 400
HQJ-01CC-153		300	3000	10.81	
HQJ-01CC-154		400	4000	12.08	
HQJ-01CC-155		500	4000	13.36	
HQJ-01CC-156		600	5000	16.01	
HQJ-01CC-158		800	6000	18.66	
HQJ-01CC-202	212	200	2000	11.13	
HQJ-01CC-203		300	3000	13.14	
HQJ-01CC-204		400	4000	14.42	
HQJ-01CC-205		500	4000	15.69	
HQJ-01CC-206		600	5000	18.29	
HQJ-01CC-208		800	6000	22.26	

HQJ-02CT、P、C 型铝合金水平弯通桥架
HQJ-02CT、P、C Al alloy horizontal bend cable support

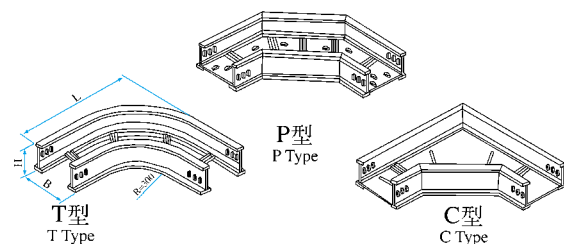


型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg)		
				T 型Type	P 型Type	C 型Type
T P C 型	112	200	600	5.67	7.10	8.26
		300	700	6.63	10.39	11.66
		400	800	7.84	13.25	14.84
		500	900	8.96	15.90	18.55
		600	1000	11.13	24.06	26.39
		800	1200	13.46	30.10	33.13
T P C 型	162	200	700	8.06	10.01	11.40
		300	800	9.28	13.78	15.48
		400	900	10.49	16.96	18.23
		500	1000	11.71	20.56	22.79
		600	1100	14.15	28.83	32.01
		800	1300	16.96	37.52	41.45
T P C 型	212	200	700	10.60	12.19	13.78
		300	800	11.98	16.11	18.23
		400	900	13.36	19.50	22.15
		500	1000	14.73	23.85	27.03
		600	1100	17.60	31.91	35.72
		800	1300	20.99	39.86	44.41

HQJ-03CT、P、C 型铝合金水平三通桥架
HQJ-03CT、P、C Al alloy horizontal tee cable support

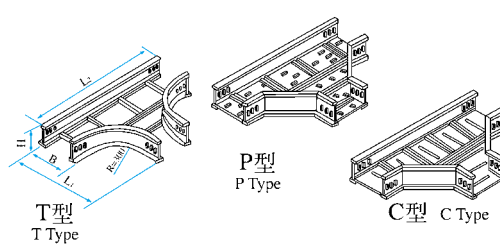


型号 Model	H (mm)	B (mm)	L ₁ (mm)	L ₂ (mm)	单件重量 (wkg)	
					T 型Type	P、C 型Type
T P C 型	112	200	600	1000	10.87	11.40
		300	700	1100	12.46	13.57
		400	800	1200	14.10	15.90
		500	900	1300	15.69	18.87
		600	1000	1400	18.87	25.23
		800	1200	1600	21.31	30.95
T P C 型	162	200	700	1200	14.63	14.00
		300	800	1300	16.32	17.91
		400	900	1400	18.02	20.99
		500	1000	1500	19.72	24.27
		600	1100	1600	23.06	31.48
		800	1300	1800	26.29	37.52
T P C 型	212	200	700	1200	16.01	16.96
		300	800	1300	18.14	20.88
		400	900	1400	20.67	24.17
		500	1000	1500	23.53	27.45
		600	1100	1600	27.14	34.98
		800	1300	1800	30.74	42.51

HQJ-04CT、P、C 型铝合金水平四通桥架
HQJ-04CT、P、C Al alloy horizontal cross cable support

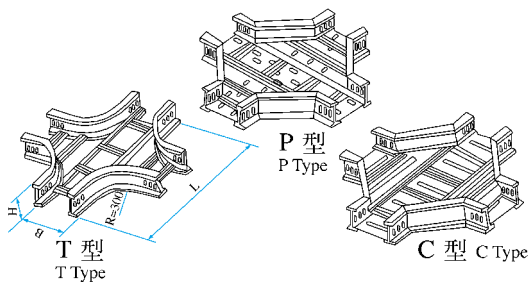


型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg)		备注 Remarks
				T 型Type	P、C 型Type	
T P C 型	112	200	1000	15.37	19.82	P、C 型B尺 寸在 400以 上的加 用梯级 加强节 Ladder rein forcing section is provided for those B with dimension over 400
		300	1100	17.38	23.11	
		400	1200	19.40	30.10	
		500	1300	21.47	33.50	
		600	1400	25.55	36.25	
		800	1600	28.89	39.11	
T P C 型	162	200	1200	18.23	22.47	
		300	1300	22.37	25.86	
		400	1400	24.38	29.50	
		500	1500	26.39	37.52	
		600	1600	30.53	41.45	
		800	1800	34.87	46.38	
T P C 型	212	200	1200	24.27	25.86	
		300	1300	26.29	29.57	
		400	1400	28.30	37.52	
		500	1500	30.37	41.45	
		600	1600	34.45	45.32	
		800	1800	39.11	51.30	

HQJ-05CT、P、C 型铝合金垂直下弯通
HQJ-05CT、P、C Al alloy vertical downward bend

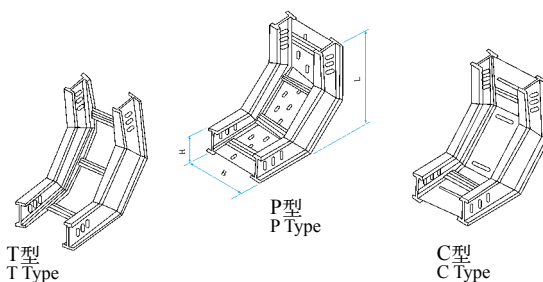


型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg)		备注 Remarks
				T 型Type	P、C 型Type	
T P C 型	112	200	412	4.19	5.41	P、C 型B尺 寸在 400以 上的加 用梯级 加强节 Ladder rein forcing section is provided for those B with dimension over 400
		300		4.82	6.89	
		400		5.46	7.90	
		500		6.04	8.96	
		600		7.26	10.97	
		800		7.95	13.78	
T P C 型	162	200	612	6.68	8.75	
		300		7.21	10.71	
		400		7.90	12.03	
		500		8.53	13.30	
		600		9.70	16.01	
		800		10.81	18.23	
aaT P C 型	212	200	662	9.49	10.71	
		300		10.71	13.94	
		400		11.45	15.37	
		500		12.67	16.80	
		600		13.73	19.61	
		800		14.95	22.68	

HQJ-06CT、P、C 型铝合金垂直上弯通
HQJ-06CT、P、C Al alloy vertical upward bend

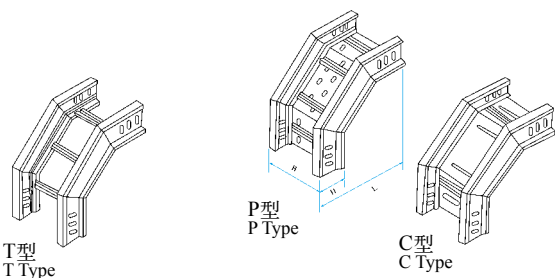


型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg)		备注 Remarks
				T 型Type	P、C 型Type	
T P C 型	112	200	400	4.19	4.93	P、C 型B尺 寸在 400以 上的加 用梯级 加强节 Ladder rein forcing section is provided for those B with dimension over 400
		300		4.82	5.90	
		400		5.46	6.94	
		500		6.04	7.74	
		600		7.26	9.38	
		800		7.95	10.81	
T P C 型	162	200	600	6.68	7.74	
		300		7.21	9.65	
		400		7.90	10.60	
		500		8.53	11.66	
		600		9.70	13.78	
		800		10.81	16.11	
T P C 型	212	200	650	9.49	10.92	
		300		10.07	12.46	
		400		10.71	13.46	
		500		11.29	14.47	
		600		12.51	16.59	
		800		13.73	19.50	

HQJ-07CT、P、C 型铝合金转动弯通
HQJ-07CT、P、C Al alloy rotatable bend

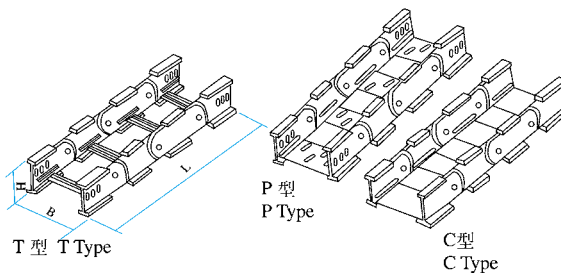


型号 Model	H (mm)	B (mm)	L (mm)	单件重量 (wkg)		备注 Remarks
				T 型Type	P、C 型Type	
T P C 型	112	200	600	6.52	7.63	
		300		7.31	8.69	
		400		8.16	9.65	
		500		8.96	12.56	
		600		10.60	11.98	
		800		12.83	15.05	
T P C 型	162	200	800	10.07	11.08	
		300		10.92	12.51	
		400		12.08	13.67	
		500		12.61	14.42	
		600		14.20	16.17	
		800		16.27	18.18	
T P C 型	212	200	1200	14.63	16.22	
		300		15.48	17.97	
		400		16.32	19.03	
		500		17.07	19.50	
		600		18.71	21.36	
		800		20.35	23.43	

LPC-01A 型铝合金配线槽
LPC-01A Al alloy cable duct




型号 Model	A (mm)	B (mm)	重量 w(kg)	备注 Remarks
LPC-01A-1	50	25	4.56	
LPC-01A-2	80	40	5.41	
LPC-01A-3	100	50	6.47	
LPC-01A-4	120	60	7.69	
LPC-01A-5	150	75	9.70	
LPC-01A-6	200	100	11.77	
LPC-01A-7	250	125	14.05	
LPC-01A-8	300	150	16.43	

LPC-02A 型铝合金水平弯通配线槽
LPC-02A Al alloy horizontal bend cable duct

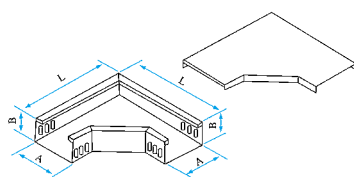


型号 Model	A (mm)	B (mm)	L (mm)	重量 w(kg)
LPC-02A-1	50	25	150	1.33
LPC-02A-2	80	40	280	2.28
LPC-02A-3	100	50	300	2.65
LPC-02A-4	120	60	320	2.97
LPC-02A-5	150	75	350	4.66
LPC-02A-6	200	100	450	6.15
LPC-02A-7	250	125	500	6.68
LPC-02A-8	300	150	650	7.63

LPC-03A 型铝合金水平三通配线槽
LPC-03A Al alloy horizontal tee cable duct

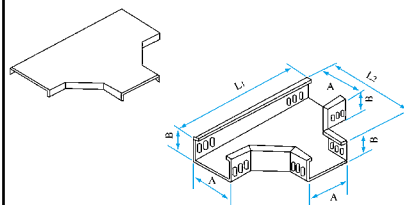


型号 Model	A (mm)	B (mm)	L ₁ (mm)	L ₂ (mm)	重量 w(kg)
LPC-03A-1	50	25	250	150	2.83
LPC-03A-2	80	40	480	280	3.21
LPC-03A-3	100	50	500	300	3.60
LPC-03A-4	120	60	520	320	4.24
LPC-03A-5	150	75	550	350	6.63
LPC-03A-6	200	100	700	450	9.06
LPC-03A-7	250	125	750	500	11.71
LPC-03A-8	300	150	1000	650	14.95

LPC-03B 型铝合金上垂直三通
LPC-03B Al alloy upward vertical tee




型号 Model	A (mm)	B (mm)	L ₁ (mm)	L ₂ (mm)	重量 w(kg)
LPC-03B-1	50	25	225	125	1.95
LPC-03B-2	80	40	440	240	2.33
LPC-03B-3	100	50	450	250	3.02
LPC-03B-4	120	60	460	260	3.50
LPC-03B-5	150	75	475	275	5.57
LPC-03B-6	200	100	600	350	7.74
LPC-03B-7	250	125	625	375	9.96
LPC-03B-8	300	150	850	500	12.30

LPC-03C 型铝合金下垂直三通
LPC-03C Al alloy downward vertical tee




型号 Model	A (mm)	B (mm)	L ₁ (mm)	L ₂ (mm)	重量 w(kg)
LPC-03C-1	50	25	225	125	2.01
LPC-03C-2	80	40	440	240	2.39
LPC-03C-3	100	50	450	250	3.18
LPC-03C-4	120	60	460	260	3.60
LPC-03C-5	150	75	475	275	5.72
LPC-03C-6	200	100	600	350	7.95
LPC-03C-7	250	125	625	375	10.39
LPC-03C-8	300	150	850	500	12.61

LPC-03D 型铝合金上侧垂直三通
LPC-03D Al alloy topside vertical tee




型号 Model	A (mm)	B (mm)	L ₁ (mm)	L ₂ (mm)	重量 w(kg)
LPC-03D-1	50	25	250	125	2.06
LPC-03D-2	80	40	480	240	2.39
LPC-03D-3	100	50	500	250	3.07
LPC-03D-4	120	60	520	260	3.60
LPC-03D-5	150	75	550	275	5.62
LPC-03D-6	200	100	700	350	7.84
LPC-03D-7	250	125	750	375	10.18
LPC-03D-8	300	150	1000	500	12.40

LPC-03E 型铝合金下侧垂直三通
LPC-03E Al alloy bottom side vertical tee

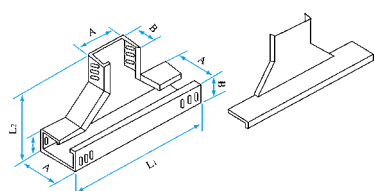


型号 Model	A (mm)	B (mm)	L ₁ (mm)	L ₂ (mm)	重量 w(kg)
LPC-03E-1	50	25	250	125	1.96
LPC-03E-2	80	40	480	240	2.44
LPC-03E-3	100	50	500	250	3.02
LPC-03E-4	120	60	520	260	3.82
LPC-03E-5	150	75	550	275	6.10
LPC-03E-6	200	100	700	350	8.37
LPC-03E-7	250	125	750	375	10.71
LPC-03E-8	300	150	1000	500	14.31

LPC-03F 型铝合金上角垂直三通
LPC-03F Al alloy top angle vertical tee




型号 Model	A (mm)	B (mm)	L ₁ (mm)	L ₂ (mm)	重量 w(kg)
LPC-03F-1	50	25	150	125	2.97
LPC-03F-2	80	40	280	240	3.66
LPC-03F-3	100	50	300	250	4.35
LPC-03F-4	120	60	320	260	5.09
LPC-03F-5	150	75	350	275	8.06
LPC-03F-6	200	100	450	350	11.02
LPC-03F-7	250	125	500	375	14.10
LPC-03F-8	300	150	650	500	17.17

LPC-03G 型铝合金下角垂直三通
LPC-03G Al alloy bottom angle tee




型号 Model	A (mm)	B (mm)	L ₁ (mm)	L ₂ (mm)	重量 w(kg)
LPC-03G-1	50	25	150	125	2.44
LPC-03G-2	80	40	280	240	2.97
LPC-03G-3	100	50	300	250	3.50
LPC-03G-4	120	60	320	260	4.03
LPC-03G-5	150	75	350	275	6.36
LPC-03G-6	200	100	450	350	8.80
LPC-03G-7	250	125	500	375	11.34
LPC-03G-8	300	150	650	500	13.89

LPC-04A 型铝合金水平四通配线槽
LPC-04A Al alloy horizontal cross cable duct




型号 Model	A (mm)	B (mm)	L (mm)	重量 w(kg)
LPC-04A-1	50	25	250	4.13
LPC-04A-2	80	40	480	4.56
LPC-04A-3	100	50	500	5.04
LPC-04A-4	120	60	520	5.72
LPC-04A-5	150	75	550	8.90
LPC-04A-6	200	100	700	12.14
LPC-04A-7	250	125	750	15.48
LPC-04A-8	300	150	1000	18.23

LPC-04B 型铝合金上垂直四通
LPC-04B Al alloy upward vertical cross

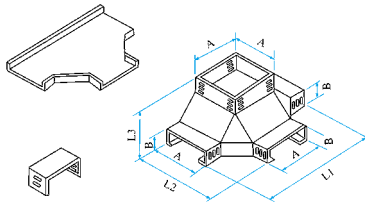


型号 Model	A × B (mm)	L1 (mm)	L2 (mm)	L3 (mm)	重量 w(kg)
LPC-04B-1	50 × 25	250	150	125	1.33
LPC-04B-2	80 × 40	480	280	240	3.92
LPC-04B-3	100 × 50	500	300	250	5.30
LPC-04B-4	120 × 60	520	320	260	6.36
LPC-04B-5	150 × 75	550	350	275	9.91
LPC-04B-6	200 × 100	700	450	350	13.78
LPC-04B-7	250 × 125	750	500	375	17.28
LPC-04B-8	300 × 150	1000	650	500	20.78

LPC-05A 型铝合金垂直上弯通
LPC-05A Al alloy vertical top bend




型号 Model	A (mm)	B (mm)	L (mm)	重量 w(kg)
LPC-05A-1	50	25	125	1.38
LPC-05A-2	80	40	240	1.70
LPC-05A-3	100	50	250	2.01
LPC-05A-4	120	60	260	2.44
LPC-05A-5	150	75	275	3.60
LPC-05A-6	200	100	350	4.77
LPC-05A-7	250	125	375	6.04
LPC-05A-8	300	150	500	6.89

LPC-05B 型铝合金垂直下弯通
LPC-05B Al alloy vertical bottom bend




型号 Model	A (mm)	B (mm)	L (mm)	重量 w(kg)
LPC-05B-1	50	25	125	1.70
LPC-05B-2	80	40	240	1.91
LPC-05B-3	100	50	250	2.33
LPC-05B-4	120	60	260	2.81
LPC-05B-5	150	75	275	4.03
LPC-05B-6	200	100	350	5.19
LPC-05B-7	250	125	375	6.52
LPC-05B-8	300	150	500	7.84

LPC-05C 型铝合金垂直左上弯通
LPC-05C Al alloy vertical left top bend




型号 Model	A (mm)	B (mm)	L1 (mm)	L2 (mm)	重量 w(kg)
LPC-05C-1	50	25	150	100	1.17
LPC-05C-2	80	40	280	180	1.59
LPC-05C-3	100	50	300	200	2.12
LPC-05C-4	120	60	320	220	2.76
LPC-05C-5	150	75	350	250	4.08
LPC-05C-6	200	100	450	300	5.46
LPC-05C-7	250	125	500	350	7.21
LPC-05C-8	300	150	650	500	8.69

LPC-05D 型铝合金垂直左下弯通
LPC-05D Al alloy vertical left bottom bend




型号 Model	A (mm)	B (mm)	L1 (mm)	L2 (mm)	重量 w(kg)
LPC-05D-1	50	25	150	125	1.48
LPC-05D-2	80	40	280	240	1.80
LPC-05D-3	100	50	300	250	2.33
LPC-05D-4	120	60	320	260	2.86
LPC-05D-5	150	75	350	275	4.24
LPC-05D-6	200	100	450	350	5.83
LPC-05D-7	250	125	500	375	7.63
LPC-05D-8	300	150	650	500	9.96

LPC-05E 型铝合金垂直右上弯通
LPC-05E Al alloy vertical right top bend




型号 Model	A (mm)	B (mm)	L1 (mm)	L2 (mm)	重量 w(kg)
LPC-05E-1	50	25	150	100	1.17
LPC-05E-2	80	40	280	180	1.54
LPC-05E-3	100	50	300	200	2.12
LPC-05E-4	120	60	320	220	2.76
LPC-05E-5	150	75	350	250	4.08
LPC-05E-6	200	100	450	300	6.04
LPC-05E-7	250	125	500	360	8.06
LPC-05E-8	300	150	600	500	10.07

LPC-05F 型铝合金垂直右下弯通
LPC-05F Al alloy vertical right bottom bend




型号 Model	A (mm)	B (mm)	L1 (mm)	L2 (mm)	重量 w(kg)
LPC-05F-1	50	25	150	125	1.48
LPC-05F-2	80	40	280	240	1.80
LPC-05F-3	100	50	300	250	2.33
LPC-05F-4	120	60	320	260	3.07
LPC-05F-5	150	75	350	275	4.24
LPC-05F-6	200	100	450	350	6.15
LPC-05F-7	250	125	500	375	8.16
LPC-05F-8	300	150	650	500	10.28

LPC-06A 型铝合金异径接头
LPC-06A Al alloy reducer connector




型号 Model	A1 × B1 (mm)	A2 × B2 (mm)	L (mm)	重量 w(kg)
LPC-06A-1	50 × 25	100 × 50	300	1.48
LPC-06A-2	80 × 40	150 × 75	300	2.23
LPC-06A-3	80 × 40	200 × 100	300	2.60
LPC-06A-4	100 × 50	200 × 100	350	4.03
LPC-06A-5	100 × 50	300 × 150	450	4.35
LPC-06A-6	200 × 100	250 × 125	350	4.66
LPC-06A-7	250 × 100	300 × 150	450	5.41
LPC-06A-8	250 × 125	300 × 150	450	5.72

LPC-06B 型铝合金异径接头
LPC-06B Al alloy reducer connector




型号 Model	$A_1 \times B_1$ (mm)	$A_2 \times B_2$ (mm)	L (mm)	重量 w(kg)
LPC-06B-1	50 × 25	100 × 50	300	1.48
LPC-06B-2	80 × 40	150 × 75	300	2.23
LPC-06B-3	80 × 40	200 × 100	300	2.60
LPC-06B-4	100 × 50	200 × 100	350	4.03
LPC-06B-5	100 × 50	300 × 150	450	4.35
LPC-06B-6	200 × 100	250 × 125	350	4.66
LPC-06B-7	200 × 100	300 × 150	450	5.41
LPC-06B-8	250 × 125	300 × 150	450	5.72

LPC-01B 型铝合金配线槽封头
LPC-01B Al alloy cable duct head




型号 Model	A (mm)	B (mm)	$A_1 \times B_1$ (mm)	重量 w(kg)
LPC-01B-1	50	25	46 × 21	0.11
LPC-01B-2	80	40	76 × 36	0.16
LPC-01B-3	100	50	96 × 46	0.21
LPC-01B-4	120	60	116 × 56	0.34
LPC-01B-5	150	75	145 × 70	0.48
LPC-01B-6	200	100	195 × 95	0.64
LPC-01B-7	250	125	245 × 120	0.72
LPC-01B-8	300	150	295 × 145	0.76

LFZ-01 型铝合金直通护罩
LFZ-01 Al alloy straight cover




型号 Model	B (mm)	重量 w(kg)	备注 Remarks
LFZ-01-2	200	5.41	
LFZ-01-3	300	7.74	
LFZ-01-4	400	11.02	
LFZ-01-5	500	13.36	
LFZ-01-6	600	16.38	
LFZ-01-8	800	19.93	
LFZ-01-9	900	21.31	
LFZ-01-10	1000	24.65	

LFZ-02 型铝合金水平弯通护罩
LFZ-02 Al alloy horizontal bend cover

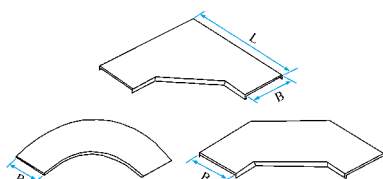


型号 Model	B (mm)	L(mm)		重量 w(kg)
		I	II	
LFZ-02-2	200	600	700	4.51
LFZ-02-3	300	700	800	6.57
LFZ-02-4	400	800	900	8.69
LFZ-02-5	500	900	1000	11.02
LFZ-02-6	600	1000	1100	16.22
LFZ-02-8	800	1200	1300	18.87
LFZ-02-9	900	1300	1400	22.58
LFZ-02-10	1000	1400	1500	25.86

LFZ-03 型铝合金水平三通护罩
LFZ-03 Al alloy horizontal tee cover

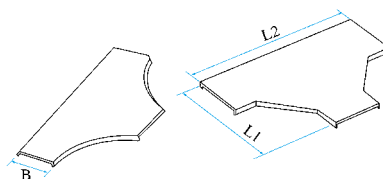


型号 Model	B (mm)	L ₁ (mm)	L ₂ (mm)	重量 w(kg)
LFZ-03-2	200	700	1200	8.80
LFZ-03-3	300	800	1300	12.72
LFZ-03-4	400	900	1400	15.11
LFZ-03-5	500	1000	1500	17.70
LFZ-03-6	600	1100	1600	23.43
LFZ-03-8	800	1300	1800	26.29
LFZ-03-9	900	1400	1900	29.95
LFZ-03-10	1000	1500	2000	32.97

LFZ-04 型铝合金水平四通护罩
LFZ-04 Al alloy horizontal cross cover




型号 Model	B (mm)	L(mm)		重量 w(kg)
		I	II	
LFZ-04-2	200	1000	1200	13.78
LFZ-04-3	300	1100	1300	19.19
LFZ-04-4	400	1200	1400	22.05
LFZ-04-5	500	1300	1500	25.07
LFZ-04-6	600	1400	1600	31.75
LFZ-04-8	800	1600	1800	35.25
LFZ-04-9	900	1700	1900	39.22
LFZ-04-10	1000	1800	2000	43.67

LFZ-05 型铝合金垂直下弯通护罩
LFZ-05 Al alloy vertical bottom bend cover




型号 Model	B (mm)	L(mm)			重量 w(kg)
		I	II	III	
LFZ-05-2	200	300	450	500	2.12
LFZ-05-3	300				3.29
LFZ-05-4	400				4.03
LFZ-05-5	500				4.82
LFZ-05-6	600				6.31
LFZ-05-8	800				6.63
LFZ-05-9	900				7.79
LFZ-05-10	1000				9.12

LFZ-06 型铝合金垂直上弯通护罩
LFZ-06 Al alloy vertical top bend cover






型号 Model	B (mm)	L(mm)			重量 w(kg)
		I	II	III	
LFZ-06-2	200	400	550	600	3.16
LFZ-06-3	300				4.08
LFZ-06-4	400				4.98
LFZ-06-5	500				5.94
LFZ-06-6	600				7.79
LFZ-06-8	800				8.75
LFZ-06-9	900				9.65
LFZ-06-10	1000				10.81


LFZ-07 型铝合金转动弯通护罩
LFZ-07 Al alloy rotatable bend cover

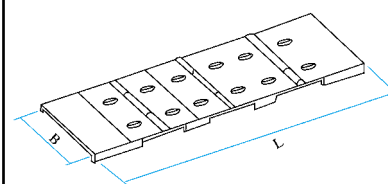



型号 Model	B (mm)	L(mm)			重量 w(kg)
		I	II	III	
LFZ-07-2	200	600	800	1200	3.18
LFZ-07-3	300				4.93
LFZ-07-4	400				6.04
LFZ-07-5	500				7.21
LFZ-07-6	600				9.43
LFZ-07-8	800				10.60
LFZ-07-9	900				11.98
LFZ-07-10	1000				13.36

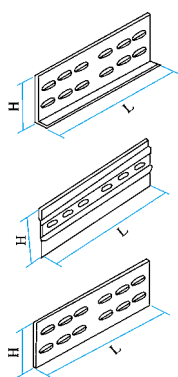
产品外形 Shape	型号 Model		H (mm)	L (mm)	重量 w(kg)		安装图例 Schematic diagram
HQJ-LF-01 型直接片 HQJ-LF-01 direct connection piece 	A 型	HQJ-LF-01A-25	25	220	25	0.11	 LF-01A 型直接片 Type LF-01A direct connection piece 注：“A型”直接片 用于AT、AP、AC型桥架和LPC型配线槽；“B型”直接片 用于BT、BP、BC型桥架。“C型”直接片 用于CT、CP、CC型桥架。 Note: Type A for AT, AP, AC, LPC, Type B for BT, BP BC, Type C for CT, CP, CC
		HQJ-LF-01A-40		220	40	0.17	
		HQJ-LF-01A-50			50	0.19	
		HQJ-LF-01A-60			60	0.23	
		HQJ-LF-01A-75			75	0.31	
		HQJ-LF-01A-100			100	0.48	
		HQJ-LF-01A-125			125	1.01	
		HQJ-LF-01A-150			150	1.33	
	HQJ-LF-01A-200	175	200	1.48			
	B 型	HQJ-LF-01A-100	70	220	100	0.64	
		HQJ-LF-01A-150	120	220	150	0.95	
		HQJ-LF-01A-200	170		200	1.42	
	C 型	HQJ-LF-01A-100	70	220	100	0.53	
		HQJ-LF-01A-150	112		150	0.95	
		HQJ-LF-01A-200	162		200	1.33	

HQJ-LF-02 型调高片 HQJ-LF-02 Height adjusting piece 	型号 Model	H ₁ (mm)	H ₂ (mm)	L (mm)	重量 w(kg)
	HQJ-LF-02-75/100	50	75	220	0.42
	HQJ-LF-02-75/150	50	125	220	0.85
	HQJ-LF-02-75/200	50	175		1.27
	HQJ-LF-02-75/150	75	125		0.85
	HQJ-LF-02-75/200	75	175	1.17	
	HQJ-LF-02-75/200	125	175	220	1.59

HQJ-LF-03 型弯接片 HQJ-LF-03 Bended connection piece 	型号 Model	H (mm)	L ₁ (mm)	L ₂ (mm)	重量 w(kg)
	HQJ-LF-03-50	25	110	200	0.32
	HQJ-LF-03-75	50			0.53
	HQJ-LF-03-100	75			1.27
	HQJ-LF-03-150	125	110	300	1.80
	HQJ-LF-03-200	175			2.01

HQJ-LF-04 型调角片 HQJ-LF-04 Angle adjusting piece 	型号 Model	H (mm)	H ₁ (mm)	L ₂ (mm)	重量 w(kg)
	HQJ-LF-04-75	75	50	170	0.74
	HQJ-LF-04-100	100	75	195	1.38
	HQJ-LF-04-150	150	125	245	2.12
	HQJ-LF-04-200	200	175	295	3.07

HQJ-LF-05 型调宽片 HQJ-LF-05 Wide adjusting piece 	型号 Model	H ₁ (mm)	H ₂ (mm)	L (mm)	重量 w(kg)
	HQJ-LF-05-100	75	50	100	0.82
	HQJ-LF-05-150			150	1.27
	HQJ-LF-05-200			200	1.70
	HQJ-LF-05-300			300	2.17
	HQJ-LF-05-400			400	2.76
	HQJ-LF-05-500			500	3.29


HQJ-LF-06 型铝合金桥架终端封头 HQJ-LF-06 End piece 	型号 Model	H (mm)	B (mm)	H ₁ (mm)	B ₁ (mm)	重量 w(kg)
	HQJ-LF-06-100	75	100	50	95	0.95
	HQJ-LF-06-150		150		145	1.38
	HQJ-LF-06-200		200		195	1.80
	HQJ-LF-06-250		250		245	2.28
	HQJ-LF-06-300		300		295	2.86
	HQJ-LF-06-400		400		395	3.39
	HQJ-LF-06-500		500		495	3.82
	HQJ-LF-06-600		600		595	4.13
	HQJ-LF-06-800		800		795	4.45
	HQJ-LF-06-1000		1000		995	4.88

NDCH-A耐火桥架（防火桥架）

NDCH-A系列（耐火桥架）防火桥架是本公司按GA479-2004标准要求自制的一种防火、阻燃性能极高的新型产品，已通过国家级耐火试验，其耐火为性能高达I级即耐火维持工作时间≥60min。由于其结构轻、承载力大、安全可靠、安装方便等优点，能广泛应用于化工、石油、冶金等有消防要求的环境中，给用户带来显著的经济效益。

The NDCH-A series fire resistance cable tray is made by our company by GA479-2004 standard. It has proper fireproof, anti-inflammable updating products and its fireproof level can up to I level, that means it can work ≥60min. Light weight, Bearing strong load, Convenience to install, Safety and reliable. It can be widely used to chemical, Petroleum, metallurgy, all above enterprise have requiring fire protection environment. The obviously Economic benefit will be brought to customer.

NDCH-A-K (X P) 直通
Straight

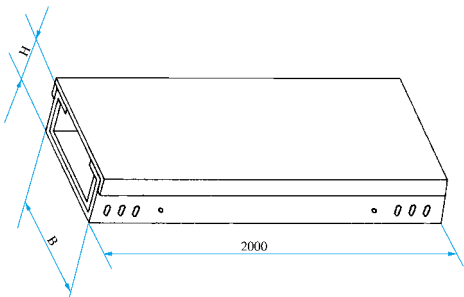

注：K为空腹式
X为夹芯式
P为普通型

序号 No.	型号 Model	外形尺寸 Outer dimensions		L (mm)	备注 Remarks
		槽宽 Width	边高 Height		
1	NDCH-A-K (X P)-1510	150	100	2000-6000	
2	NDCH-A-K (X P)-2010	200	100		
3	NDCH-A-K (X P)-3010	300	100		
4	NDCH-A-K (X P)-4010	400	100		
5	NDCH-A-K (X P)-2015	200	150		
6	NDCH-A-K(X P)-3015	300	150		
7	NDCH-A-K (X P)-4015	400	150		
8	NDCH-A-K (X P)-5015	500	150		
9	NDCH-A-K (X P)-3020	300	200		
10	NDCH-A-K (X P)-4020	400	200		
11	NDCH-A-K (X P)-5020	500	200		
12	NDCH-A-K (X P)-6020	600	200		
13	NDCH-A-K (X P)-4025	400	250		
14	NDCH-A-K (X P)-5025	500	250		
15	NDCH-A-K (X P)-6025	600	250		
16	NDCH-A-K (X P)-8025	800	250		
17	NDCH-A-K (X P)-5030	500	300		
18	NDCH-A-K (X P)-6030	600	300		

(耐火桥架)防火桥架
Fire Prevention Bracket


NDCH-B玻璃钢防腐桥架

NDCH-B型玻璃钢防腐桥架由玻璃纤维增强塑料和阻燃剂及其它材料组成，通过复合模压而成。由于其所选材料具有较低的导热系数及阻燃剂的加入使产品不仅具有耐火隔热性、自熄性，而且具有很高的耐腐蚀性，同时还具有结构轻、耐老化、安全可靠等优点，可方便的与金属桥架配套使用，在化工、冶金、石油等强腐蚀环境得到使用。

NDCH-B Fiberglass cable tray is reinforced by fiberglass, plastics, flame-retardant agent and other materials. It is also composed of compound pressure materials and stainless steel net. It has low thermal conductivity due to its materials and flame-retardant agent make it fire proof. It has many advantages such as high anti-corrosion performance, light weight, long life and dependable. It can be used together with metal cable trays. It can apply to strong corrosive environment such as chemical, metallurgy and petroleum.

NDCH-B-C-01A 玻璃钢槽式直通


Fire retarding channel straight

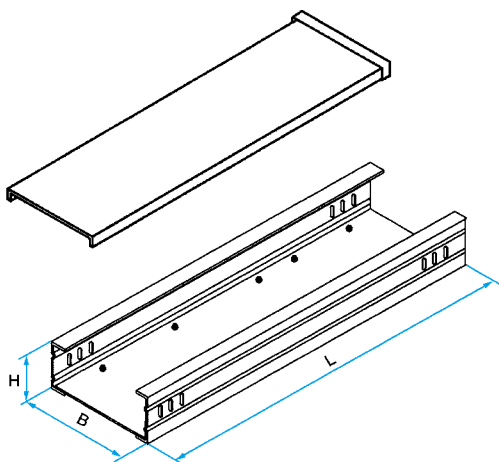

型号 Model		H (mm)	B (mm)	L (mm)	备注 Remarks
T P C 型	NDCH-B-C-01A-2010	100	200	2000-6000	宽度超过500的桥架采用加强截面 Reinforcing section is provided for those with dimension B over 500
	NDCH-B-C-01A-3010		300		
	NDCH-B-C-01A-4010		400		
	NDCH-B-01A-5010		500		
	NDCH-B-01A-6010		600		
	NDCH-B-01A-8010		800		
T P C 型	NDCH-B-01A-2015	150	200		
	NDCH-B-01A-3015		300		
	NDCH-B-01A-4015		400		
	NDCH-B-01A-5015		500		
	NDCH-B-01A-6015		600		
	NDCH-B-01A-8015		800		
T P C 型	NDCH-B-01A-2020	200	200		
	NDCH-B-01A-3020		300		
	NDCH-B-01A-4020		400		
	NDCH-B-01A-5020		500		
	NDCH-B-01A-6020		600		
	NDCH-B-01A-8020		800		

XQJ-SJ-电缆竖井

XQJ-SJ电缆竖井适用于各种井道垂直引上，引下电缆敷设装置。
XQJ-SJ Cable shafts are suitable for vertical cable laying in various shafts

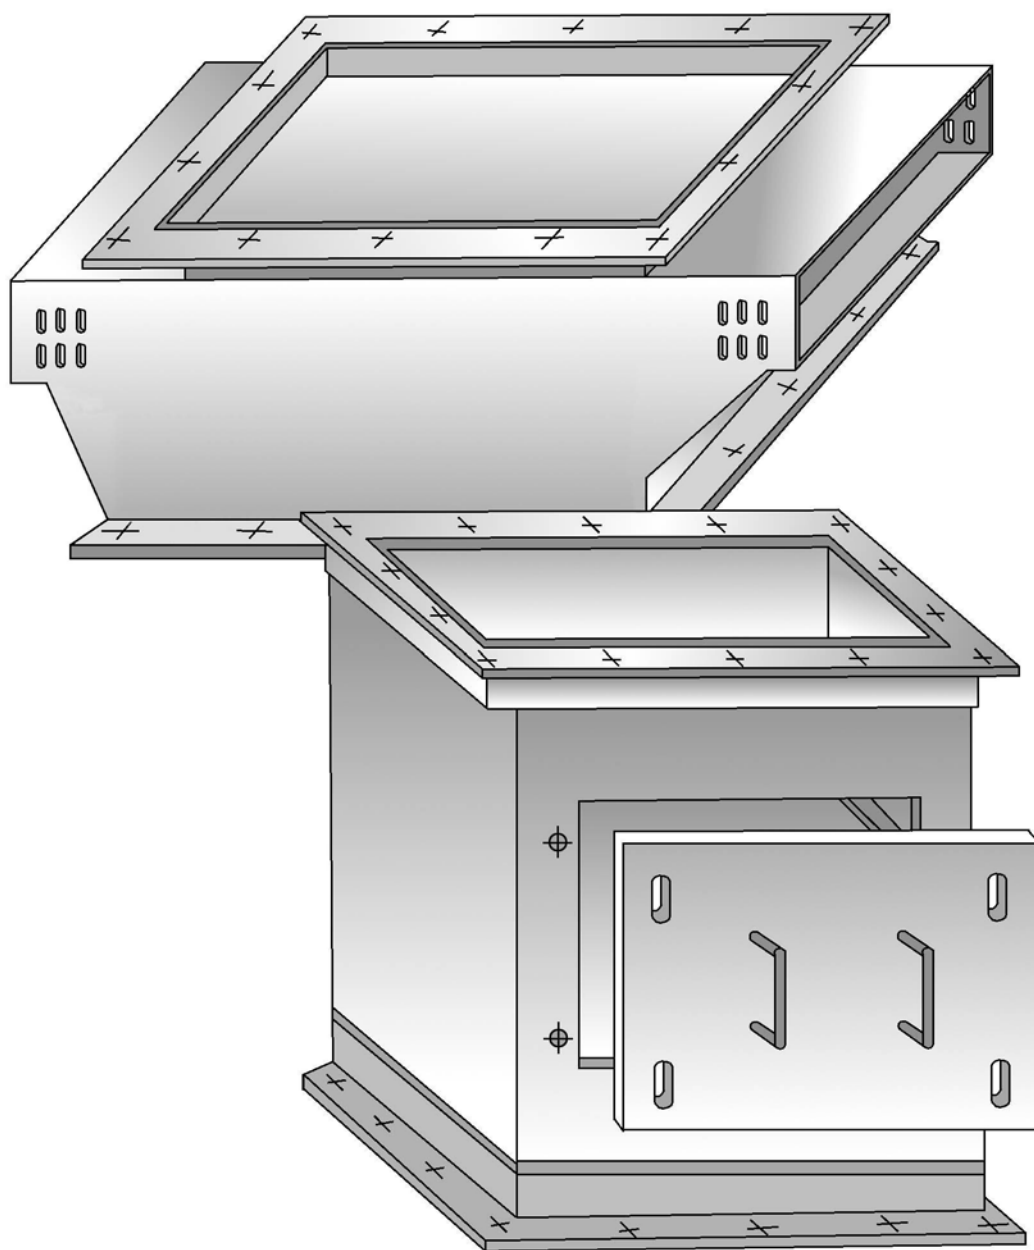


竖

井

Shafts

XQJ-SJ-01 电缆竖井


Cable shaft

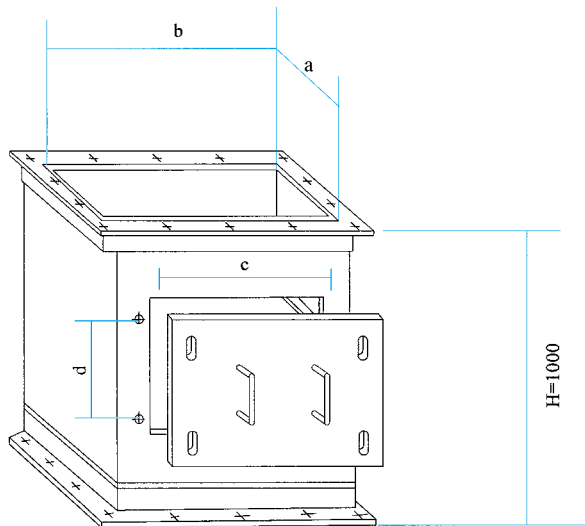

型号 Model	b	a	d × c	kg	
XQJ-SJ-01-4 × 3	400	300	600 × 240	84.10	
XQJ-SJ-01-4 × 6		600		108.83	
XQJ-SJ-01-5 × 3	500	300	600 × 340	92.35	
XQJ-SJ-01-5 × 6		600		116.97	
XQJ-SJ-01-6 × 3	600	300	600 × 440	100.56	
XQJ-SJ-01-6 × 6		600		125.19	
XQJ-SJ-01-8 × 3	800	300	600 × 600	10.97	
XQJ-SJ-01-8 × 6		600		161.04	
XQJ-SJ-01-10 × 3	1000	300	600 × 800	151.44	
XQJ-SJ-01-10 × 6		600		180.22	
XQJ-SJ-01-12 × 3	1200	300	600 × 1000	170.63	
XQJ-SJ-01-12 × 6		600		199.43	

XQJ-SJ-02 竖井盖板


Shaft covering board

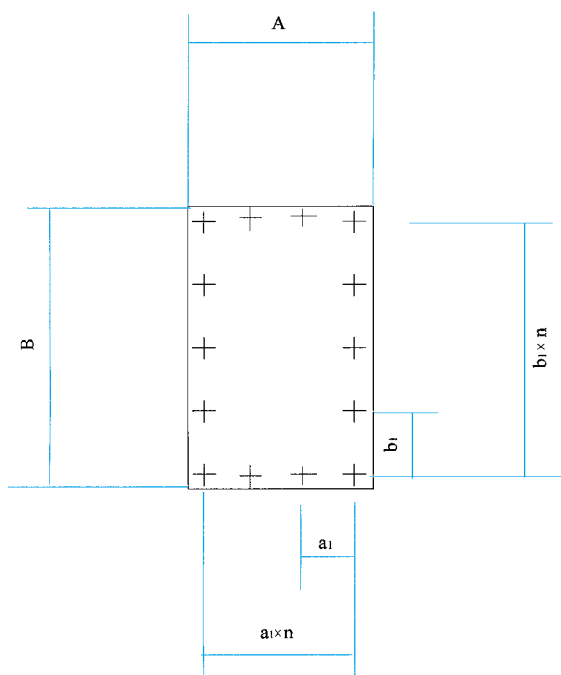

型号 Model	b	a	b ₁ × n	a ₁ × n	wkg
XQJ-SJ-02-4 × 3	500	400	110 × 4	85 × 4	5.55
XQJ-SJ-02-4 × 6		700		128 × 5	9.71
XQJ-SJ-02-5 × 3	600	400	135 × 4	85 × 4	6.66
XQJ-SJ-02-5 × 6		700		128 × 5	11.65
XQJ-SJ-02-6 × 3	700	400	128 × 5	85 × 4	7.77
XQJ-SJ-02-6 × 6		700		128 × 5	13.60
XQJ-SJ-02-8 × 3	900	400	142 × 6	88 × 4	9.99
XQJ-SJ-02-8 × 6		700		130 × 5	17.48
XQJ-SJ-02-10 × 3	1100	400	105 × 10	88 × 4	12.21
XQJ-SJ-02-10 × 6		700		130 × 5	21.36
XQJ-SJ-02-12 × 3	1300	400	125 × 10	88 × 4	14.43
XQJ-SJ-02-12 × 6		700		130 × 5	25.25

XQJ-SJ-03 竖井接头 (双侧)

Shaft connection (double sided)

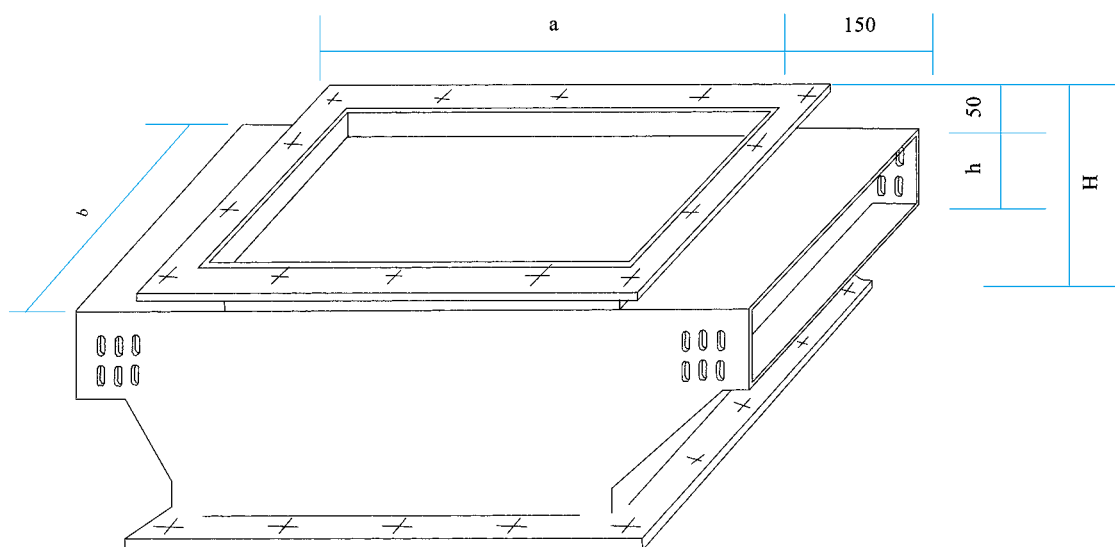


型号 Model	h	H	b	a	wkg	wkg
XQJ-SJ-04-T ₁ -4 × □ × 6	100	300	400	300/600	29.02	37.56
XQJ-SJ-04-T ₁ -5 × □ × 6			500		31.80	40.36
XQJ-SJ-04-T ₁ -6 × □ × 6			600		34.70	43.20
XQJ-SJ-04-T ₁ -8 × □ × 6			800		40.36	55.57
XQJ-SJ-04-T ₁ -4 × □ × 10	150	350	400	300/600	33.86	43.81
XQJ-SJ-04-T ₁ -5 × □ × 10			500		37.17	47.09
XQJ-SJ-04-T ₁ -6 × □ × 10			600		40.48	50.39
XQJ-SJ-04-T ₁ -8 × □ × 10			800		47.09	64.82
XQJ-SJ-04-T ₁ -10 × □ × 10	200	400	1000	300/600	60.96	72.55
XQJ-SJ-04-T ₁ -4 × □ × 15			400		38.69	50.06
XQJ-SJ-04-T ₁ -5 × □ × 15			500		42.41	53.82
XQJ-SJ-04-T ₁ -6 × □ × 15			600		46.27	57.59
XQJ-SJ-04-T ₁ -8 × □ × 15			800		53.82	74.08
XQJ-SJ-04-T ₁ -10 × □ × 15			1000		69.67	82.90
XQJ-SJ-04-T ₁ -12 × □ × 15			1200		78.49	91.74

注：法兰螺孔见同型号竖井盖板

Note: For flange bolt holes see shaft cover with the same size.

XQJ-SJ-04 竖井接头 (单侧)

Shaft connection (single sided)

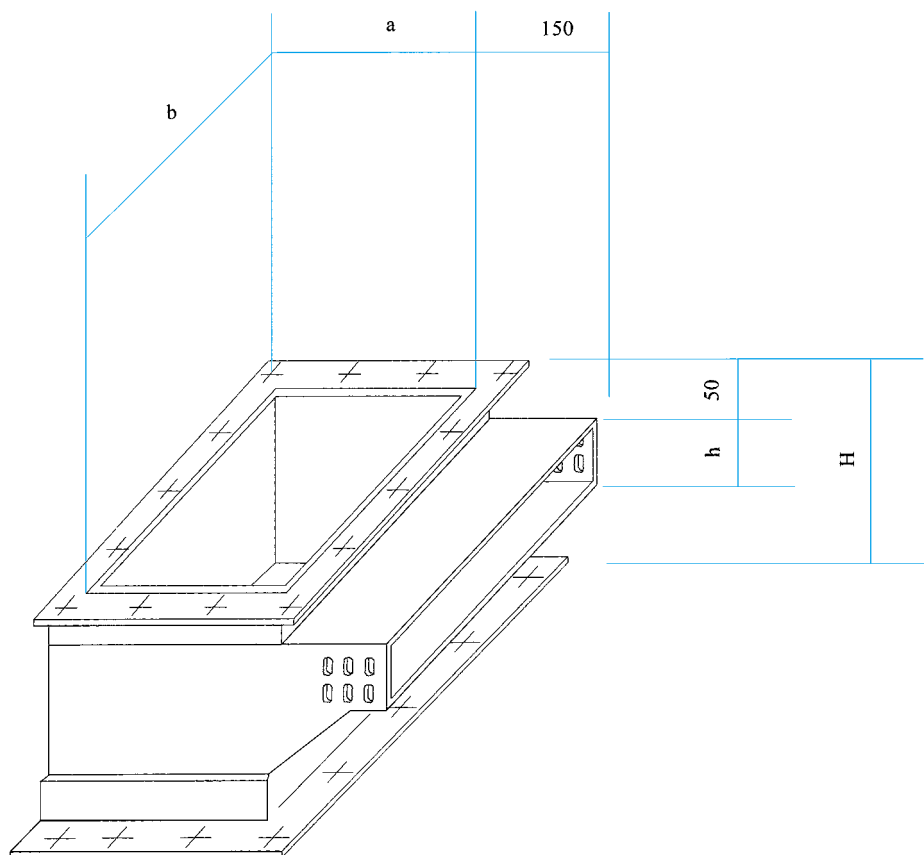


型号 Model	h	H	b	a	wkg	wkg
XQJ-SJ-04-T ₁ -4 × □ × 6	100	300	400	300/600	29.02	37.56
XQJ-SJ-04-T ₁ -5 × □ × 6			500		31.80	40.36
XQJ-SJ-04-T ₁ -6 × □ × 6			600		34.70	43.20
XQJ-SJ-04-T ₁ -8 × □ × 6			800		40.36	55.57
XQJ-SJ-04-T ₁ -4 × □ × 10	150	350	400	300/600	33.86	43.81
XQJ-SJ-04-T ₁ -5 × □ × 10			500		37.17	47.09
XQJ-SJ-04-T ₁ -6 × □ × 10			600		40.48	50.39
XQJ-SJ-04-T ₁ -8 × □ × 10			800		47.09	64.82
XQJ-SJ-04-T ₁ -10 × □ × 10	200	400	1000	300/600	60.96	72.55
XQJ-SJ-04-T ₁ -4 × □ × 15			400		38.69	50.06
XQJ-SJ-04-T ₁ -5 × □ × 15			500		42.41	53.82
XQJ-SJ-04-T ₁ -6 × □ × 15			600		46.27	57.59
XQJ-SJ-04-T ₁ -8 × □ × 15			800		53.82	74.08
XQJ-SJ-04-T ₁ -10 × □ × 15			1000		69.67	82.90
XQJ-SJ-04-T ₁ -12 × □ × 15			1200		78.49	91.74

注：法兰螺孔见同型号竖井盖板

Note: For flange bolt holes see shaft cover with the same size.

电缆竖井安装示意图

Schematic diagram of mounting for shafts

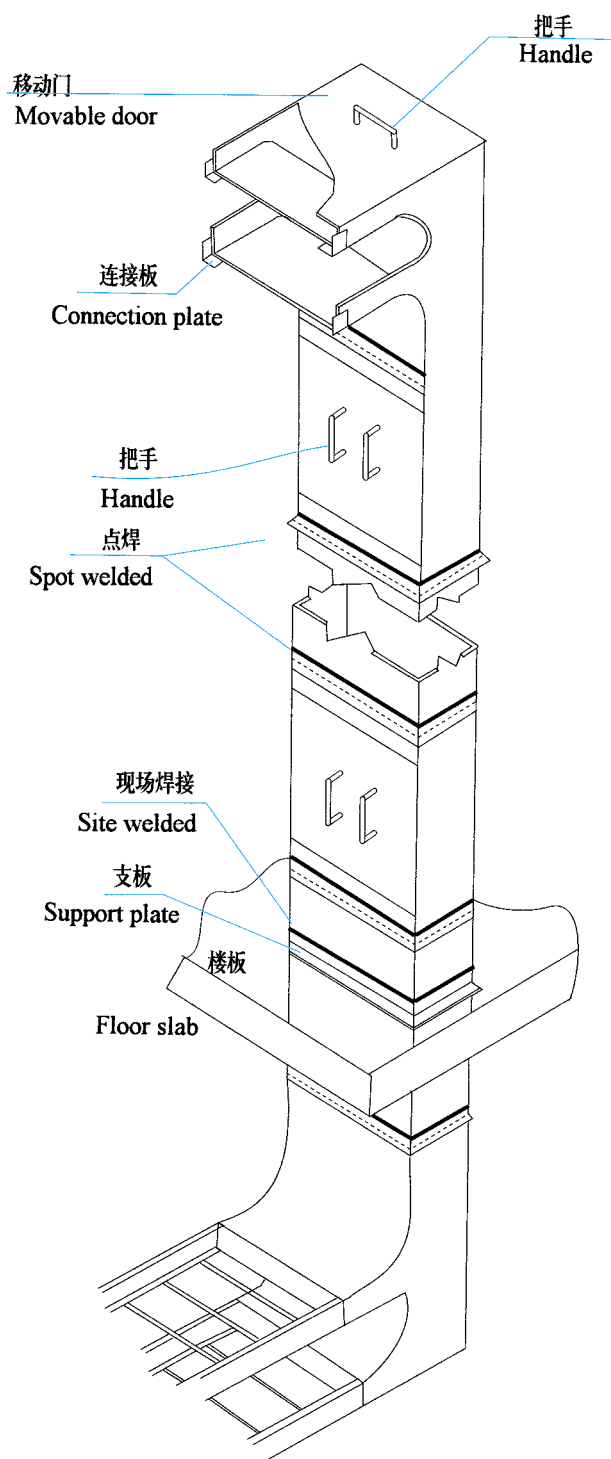


ZJ-安装支架

ZJ-安装支架是支撑电缆桥架和电缆的主要部件。它由立柱、立柱底座、托臂等组成、它具有结构简单、重量轻、强度大、造型美、安装灵活、可满足不同环境条件（工艺管道下、楼板下、墙壁上、电缆沟内）和不同形式（悬吊式、直立式、侧立式、单边、双边和多层等）的安装。

ZJ-Support is the main component of the cable supports system. It consists of the upright column, column support and bracket. It features simple structure, small weight, great strength, nice shape and flexible installation. It can satisfy different environmental conditions (process piping racks, under floor, in walls or in cable ducts) and requirements for different erection forms (suspension type, upright type, offset type, single-side, double-side or multi layer).

工字钢立柱 XQJ-H-01A
I-steel column

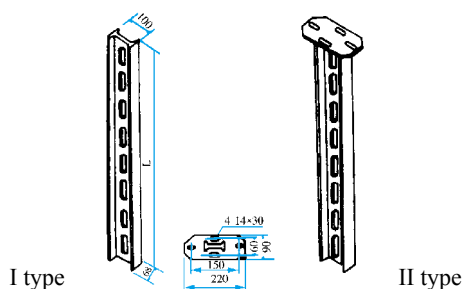


序号 No.	型号 Model	规格L Standard	重量kg Weight	备注 Remark
1	H-01A-3	300	4.52	II 型每件加 3.05kg Add 3.05kg per one for II type
2	H-01A-5	500	7.53	
3	H-01A-8	800	12.04	
4	H-01A-10	1000	15.05	
5	H-01A-15	1500	22.58	
6	H-01A-20	2000	30.10	
7	H-01A-25	2500	37.63	
8	H-01A-30	3000	45.16	

H-01A工字钢立柱是支撑电缆桥架的主要部件，它适用于电缆多、载荷重、桥架跨度大的场合，它可以根据需要安装成悬吊式、直立式、倾臂式悬吊式、直立式均可用双边多层安装。其长度需要选择。配套托臂为TB-01A。

H-01A model I-steel columns are the main components holding cable bridge. They apply to the conditions: multiple cables, heavy load and big span of bridges. They include pendent, vertical and lateral erection. The former two apply to both-side and multi-layer installation. The length can be decided in compliance with requirements, fitted with TB-01A model bracket arms.

丁字钢立柱 XQJ-H-01B
丁-steel column

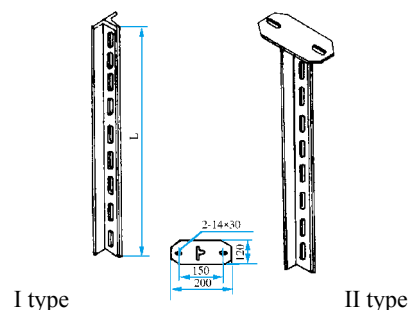


序号 No.	型号 Model	规格L Standard	重量kg Weight	备注 Remark
1	H-01B-3	300	2.24	II 型每件加 3.52kg Add 3.52kg per one for II type
2	H-01B-5	500	3.73	
3	H-01B-8	800	5.97	
4	H-01B-10	1000	7.45	
5	H-01B-15	1500	11.18	
6	H-01B-20	2000	14.90	

H-01B丁字钢立柱可在载荷轻时作单边吊装，配套托臂为TB-01A安装方法工字钢相同。

Pendent side-mounting for H-01B 丁-steel columns with light load, fitted with TB-01A model bracket arms as the installation of I-steel.

槽钢立柱 XQJ-H-01C
Channel steel column XQJ-H-01C




序号 No.	型号 Model	规格L Standard	重量kg Weight B=80 B=100	备注 Remark
1	H-01C-3	300	3.50 4.38	II 型每件加 2.86kg Add 2.86kg per one for II type
2	H-01C-5	500	5.83 7.29	
3	H-01C-8	800	9.33 11.66	
4	H-01C-10	1000	11.66 14.05	
5	H-01C-15	1500	17.49 21.87	
6	H-01C-20	2000	23.32 29.15	

H-01C槽型立柱可作垂直引下，引上或与TB-03托臂配套作吊装立柱。

Lead-up and lead-down, or as pendent columns with TB-03 mode bracket arms.

角钢立柱 XQJ-H-01D
Angle steel column XQJ-H-01D




序号 No.	型号 Model	规格L Standard	重量kg Weight	备注 Remark
1	H-01D-3	300	1.56	II 型每件加 2.86kg Add 2.86kg per one for II type
2	H-01D-5	500	2.61	
3	H-01D-8	800	4.17	
4	H-01D-10	1000	5.20	
5	H-01D-15	1500	7.81	
6	H-01D-20	2000	10.41	

H-01D角钢立柱可用作轻载荷单边吊装立柱，配套托臂为TB-03。

Used as pendent side-installation of light load, fitted with TB-03 model bracket arms.

异型立柱 XQJ-H-01E Sketch column XQJ-H-01E




序号 No.	型号 Model	规格L Standard	重量kg Weight	备注 Remark
1	H-01E-3	3000	1.87	II 型每件加2.86kg
2	H-01E-5	500	3.11	
3	H-01E-8	800	4.97	
4	H-01E-10	1000	6.21	
5	H-01E-15	1500	9.33	
6	H-01E-20	2000	12.42	

H-01E异型立柱可作为单边吊装桥架的立柱，配套托臂为TB-03C底座连接螺栓M12。

Used as the column of single-side pendent installed bridge, fitted with TB-03C model bracket arms and M12 bolts connecting it to the backseat.

工字钢立柱底座 XQJ-H-02A I-steel column backseat XQJ-H-02A

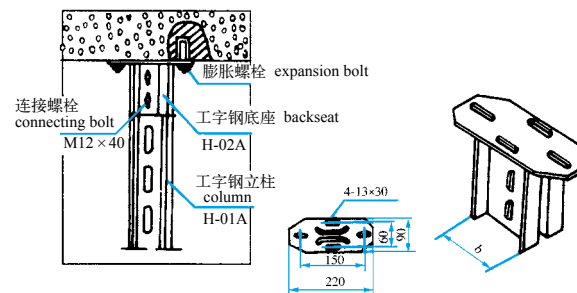


序号 No.	型号 Model	规格b Standard	重量kg Weight	备注 Remark
1	H-02A-8*	80	5.83	配8*工字钢 Fitted with 8*
2	H-02A-10*	100	6.15	配10*工字钢 Fitted with 10*

H-02A工字钢立柱底座，用于悬挂式直立工字钢立柱的支承连接，安装时先用M12膨胀螺栓或预埋螺栓固定好底座(如与钢件连接可采用焊接，焊好后涂漆)，然后用M12×40连接螺栓固定工字钢。

Used for supporting connection of the pendent and vertical I-steel column. firstly, the backseat must be fixed with M 12 expansion bolts or advance buried bolts (welded if connected with steel details, then painted), then I-steel must be fixed with M 12 × 40 connecting bolts.

槽钢立柱底座 XQJ-H-02C Channel steel column backseat XQJ-H-02C

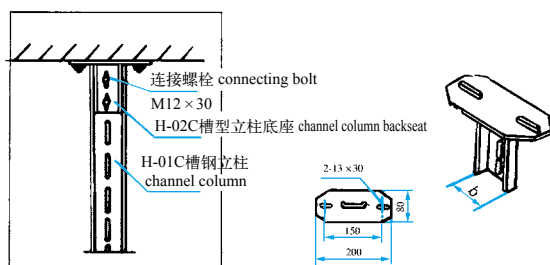


序号 No.	型号 Model	规格b Standard	重量kg Weight	备注 Remark
1	H-02C-8*	80	5.09	配H-01C、H-01E立柱 Fitted with H-01C, H-01E model column
2	H-02C-10*	100	5.62	

H-02C槽钢立柱底座可与H-01C槽钢立柱、H-01E异型立柱配套、可作吊装电缆或垂直引上、引下用。

Fitted with H-01C model channel steel column and H-01E model sketch column, used to mount cables pendently or vertically lead-up and lead-down.


角钢立柱底座 XQJ-H-02D Angle steel column backseat XQJ-H-02D

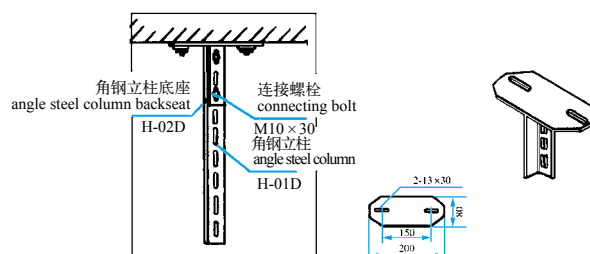

H-02D角钢立柱底座与H-01B丁字钢立柱、H-01D角钢立柱配套作吊装桥架用，连接螺栓M10×30，每件重量3.8kg

H-02D model column backseat is fitted with H-01B model T-steel column and H-01D model angle column to install bridge pendently. M10 × 30 connecting bolt and weight 3.8kg per one.

工字钢倾斜底座 XQJ-H-03A
I-steel inclined backseat XQJ-H-03A

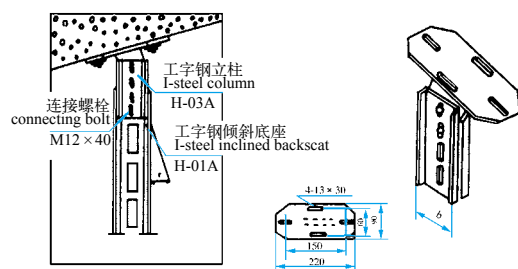


序号 No.	型号 Model	规格b Standard	重量kg Weight	备注 Remark
1	H-03A-8*	80	7.00	配8*工字钢 Fitted with 8*
2	H-03A-10*	100	7.95	配10*工字钢 Fitted with 10* I-steel

H-03A倾斜底座与H-01A型工字钢立柱配套，适用于倾斜过梁安装，也可紧固在墙壁作倾斜支撑用。

Fitted with H-01A model I-steel column and applies to inclined lintel, also fastend to wall as slope holder.

槽钢倾斜底座 XQJ-H-03C
Channel steel inclined backseat XQJ-H-03C

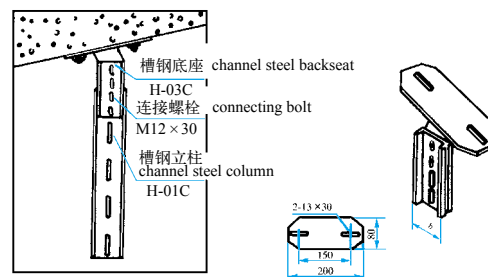


序号 No.	型号 Model	规格b Standard	重量kg Weight	备注 Remark
1	H-03C-8*	80	5.51	配8*工字钢 Fitted with 8*
2	H-03C-10*	100	6.15	配10*工字钢 Fitted with 10* I-steel

H-03C型槽钢倾斜底座可与H-01C型槽钢立柱、H-01E异型立柱套。


H-03C model channel steel inclined backseat is fitted with H-01C model channel steel column and H-01E model sketch column.

角钢倾斜底座 XQJ-H-03D
Angle steel inclined backseat XQJ-H-03D

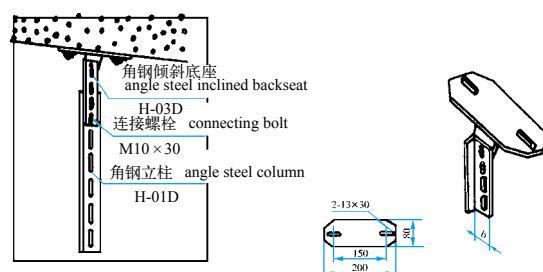

序号 No.	型号 Model	规格b Standard	重量kg Weight	备注 Remark
1	H-03D	40	4.77	配H-01D、H-01B 立柱 Fitted with H-01D and H-01B model column

托臂 XQJ-TB-01A
Bracket arm XQJ-TB-01A

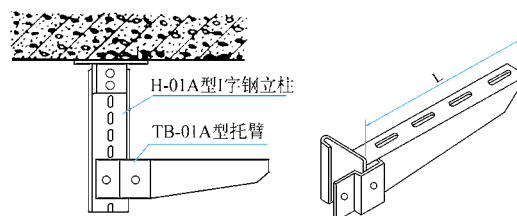


序号 No.	型号 model	规格L format	重量kg weight	备注 remark
1	TB-01A-150	150	1.75	螺栓，压板配套 供给。按件计价 Bolts and press-plates will supply in units. It will be paid by piece.
2	TB-01A-200	200	2.18	
3	TB-01A-300	300	2.90	
4	TB-01A-400	400	3.43	
4	TB-01A-500	500	4.16	
6	TB-01A-600	600	4.93	
7	TB-01A-700	700	5.64	
8	TB-01A-800	800	6.39	

TB-01A托臂为H-01A工字钢及H-01B丁字钢型立柱配套使用，它可以自由升降，配合时可以双边或单边敷设。

Fitted with H-01A model I-steel and H-01B model T-steel columns, may rise and fall freely, layed on the one side or the both sides.


托臂 XQJ-TB-01B Bracket arm XQJ-TB-01B

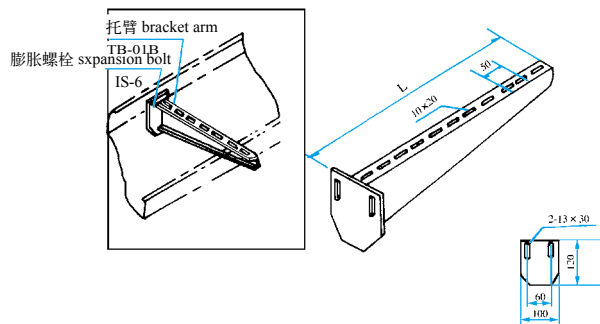

序号 No.	型号 model	规格L format	重量kg weight	备注 remark
1	TB-01B-150	150	2.06	
2	TB-01B-200	200	2.47	
3	TB-01B-300	300	3.10	
4	TB-01B-400	400	3.71	
4	TB-01B-500	500	4.35	
6	TB-01B-600	600	5.62	
7	TB-01B-700	700	6.47	
8	TB-01B-800	800	7.11	

TB-01B托臂一般用膨胀螺栓与墙壁等直接安装或钢件焊接。
Connected to wall with expansion bolts directly or welded with steel details.


托臂 XQJ-TB-03C Bracket arm XQJ-TB-03C

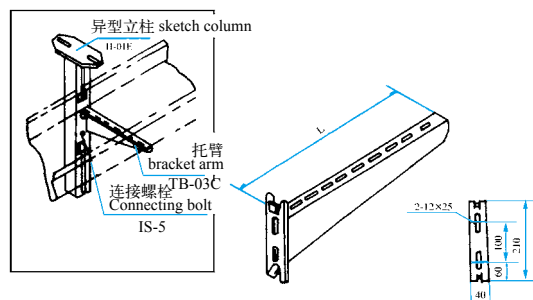

序号 No.	型号 model	规格b format	重量kg weight	备注 remark
1	TB-03C-150	150	1.39	
2	TB-03C-200	200	1.87	
3	TB-03C-300	300	2.54	
4	TB-03C-400	400	3.24	
4	TB-03C-500	500	3.92	
6	TB-03C-600	600	4.64	
7	TB-03C-700	700	5.30	
8	TB-03C-800	800	6.01	

TB-03C型托臂主要同H-01E异型立柱配套安装, IS-5连接螺栓配套供应。
Fitted with H-01E model ketch column, provided with IS-5 model connecting bolts in series.


托臂 XQJ-TB-03 Bracket arm XQJ-TB-03

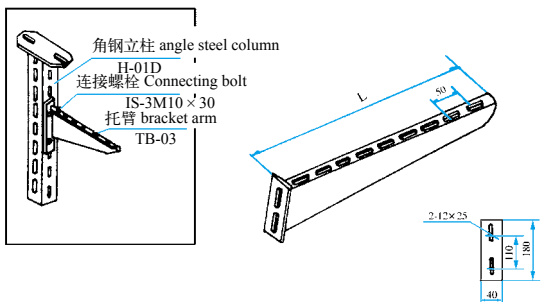

序号 No.	型号 model	规格L format	重量kg weight	备注 remark
1	TB-03-50	100	1.84	
2	TB-03-100	150	2.09	
3	TB-03-200	200	2.23	
4	TB-03-300	300	2.85	
4	TB-03-400	400	3.48	
6	TB-03-500	500	4.13	
7	TB-03-600	600	5.41	
8	TB-03-700	700	6.15	
9	TB-03-800	800	6.89	

TB-03托臂可与H-01D型角钢立柱、H-01C型钢槽立柱配套安装。
Fitted with H-01D model angle steel column and H-01C model channel column.

托臂 XQJ-TB-04 Bracket arm XQJ-TB-04

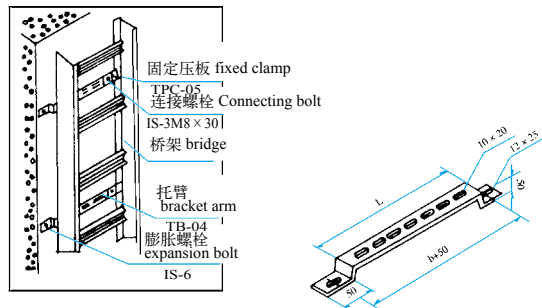


序号 No.	型号 model	规格L format	重量kg weight	备注 remark
1	TB-04-150	150	1.08	
2	TB-04-200	200	1.38	
3	TB-04-300	300	1.67	
4	TB-04-400	400	1.95	
4	TB-04-500	500	3.04	
6	TB-04-600	600	3.83	
7	TB-04-700	700	4.31	
8	TB-04-800	800	4.79	

TB-04托臂适用于各种形式桥架在垂直引上、引下或过梁时固定用。
Applying to all bridge and used for vertical leadup, lead-down and lintel.

XQJ-ZO-10 吊杆


Hanger rod



型号 Model	L	重量(kg) weight	备注 Remarks
XQJ-ZO-10-5	500	0.63	螺圈垫体 配套供应 Supplied with washers
XQJ-ZO-10-8	800	1.01	
XQJ-ZO-10-10	1000	1.26	
XQJ-ZO-10-12	1200	1.49	
XQJ-ZO-10-15	1500	2.00	
XQJ-ZO-10-20	2000	2.54	

XQJ-ZO-11 吊杆


Hanger rod



型号 Model	L	重量(kg) weight	备注 Remarks
XQJ-ZO-11-5	500	2.34	螺栓配套 供应 Supplied with bolts
XQJ-ZO-11-8	800	3.05	
XQJ-ZO-11-10	1000	3.24	
XQJ-ZO-11-12	1200	3.49	
XQJ-ZO-11-15	1500	3.99	
XQJ-ZO-11-20	2000	4.65	

XQJ-ZO-12 角钢横梁


Angle steel beam



型号 Model	L	重量(kg) weight	备注 Remarks
XQJ-ZO-12-100	200	1.49	螺栓配套 供应 Supplied with bolts
XQJ-ZO-12-200	300	2.22	
XQJ-ZO-12-300	400	3.01	
XQJ-ZO-12-400	500	3.75	
XQJ-ZO-12-500	600	4.41	
XQJ-ZO-12-600	700	4.98	
XQJ-ZO-12-800	800	6.73	

XQJ-ZO-13 底座


Base

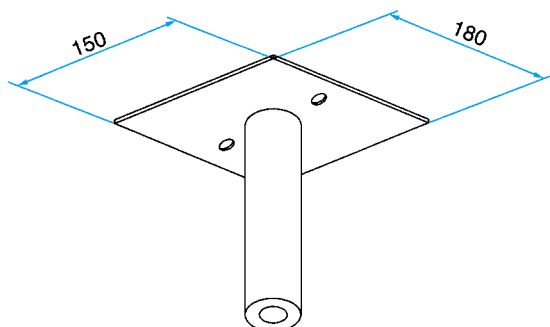

型号 Model	重量(kg) weight
XQJ-ZO-13	6.95

电缆桥架在电缆沟内安装(一)

Cable tray mounted in cable trench (I)

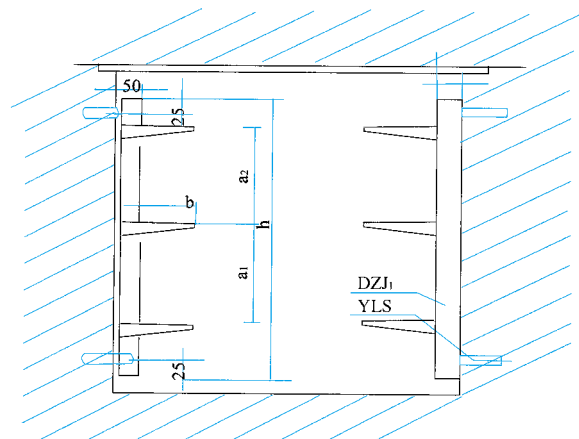

型 号 Model	名 称 Description
DZJ1 Cable support	电缆支架
YLS Embedded bolt	预埋螺栓

电缆支架间距：电力电缆：1000mm 控制电缆：800mm
Spacing between supports: 1000mm for power cables and 800mm for control cables


n 为悬臂个数

n: number of brackets

型 号 Model	n个	amm	bmm	hmm	单重(kg) Unit weight
DZJ1-22	2	a2=240	210	390	3.60
DZJ1-23			310		4.24
DZJ1-24			410		5.41
DZJ1-25			510		6.68
DZJ1-26			610		7.84
DZJ1-32	3	a1=180 a2=240	210	570	5.19
DZJ1-33			310		6.25
DZJ1-34			410		8.06
DZJ1-35			510		9.96
DZJ1-36			610		11.55
DZJ1-42	4	a1=180 a2=240 × 2	210	810	7.31
DZJ1-43			310		8.59
DZJ1-44			410		11.02
DZJ1-45			510		13.36
DZJ1-46			610		15.69
DZJ1-52	5	a1=180 × 2 a2=240 × 2	210	990	8.90
DZJ1-53			310		10.71
DZJ1-54			410		12.72
DZJ1-55			510		16.75
DZJ1-56			610		19.50

电缆桥架在电缆沟内安装(二)

Cable tray mounted in cable trench (II)

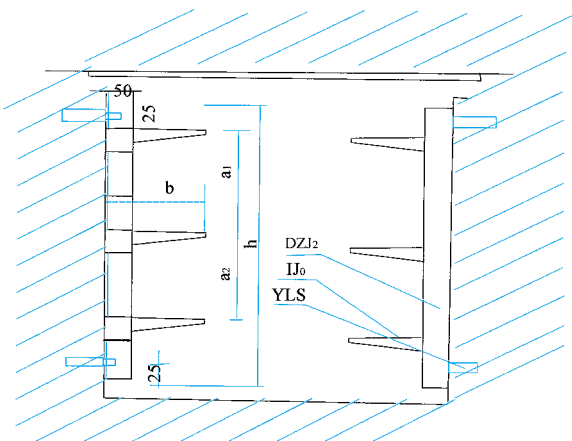

型 号 Model	名 称 Description
DZJ2 Cable support	电缆支架
YLS Embedded bolt	预埋螺栓

电缆支架间距：电力电缆：1500mm
Spacing between supports: 1500mm for power cables


n 为悬臂个数

n: number of brackets

型 号 Model	n个	amm	bmm	hmm	单重(kg) Unit weight
DZJ2-22	2	a2=280	210	430	4.45
DZJ2-23			310		5.41
DZJ2-24			410		6.78
DZJ2-25			510		8.06
DZJ2-26			610		9.33
DZJ2-32	3	a1=230 a2=280	210	660	7.00
DZJ2-33			310		8.27
DZJ2-34			410		10.18
DZJ2-35			510		12.19
DZJ2-36			610		13.89
DZJ2-42	4	a1=230 a2=280 × 2	210	940	9.54
DZJ2-43			310		11.13
DZJ2-44			410		24.38
DZJ2-45			510		16.54
DZJ2-46			610		19.61
DZJ2-52	5	a1=230 × 2 a2=280 × 2	210	1107	12.08
DZJ2-53			310		14.20
DZJ2-54			410		17.38
DZJ2-55			510		20.78
DZJ2-56			610		23.85

电缆桥架在电缆隧道安装(一)

Cable tray mounted in cable culvert (I)

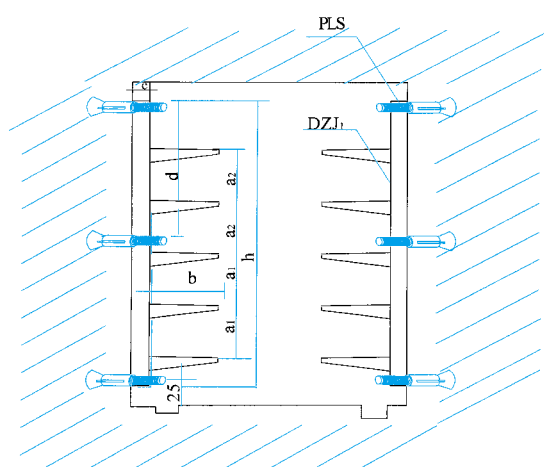

型 号 Model	名 称 Description
DZJ ₁	Cable support 电缆支架
PLS	Embedded bolt 膨胀螺栓


电缆支架间距: 电力电缆: 1000mm 控制电缆: 800mm
Spacing between supports: 1000mm for power cables and 800mm for control cables

n 为悬臂个数
n: number of brackets

型 号 Model	n 个	amm	bmm	dmm	emm	hmm	单重(kg) Unit weight
DZJ ₁ -62	6	a2=240	210	385	50 ($\angle 50 \times 5$)	1230	11.55
DZJ ₁ -63			310				13.25
DZJ ₁ -64			410				16.32
DZJ ₁ -65			510				19.40
DZJ ₁ -66			610				22.15
DZJ ₁ -72	7	a1=180 a2=240	210	625	63 ($\angle 63 \times 6$)	1470	17.07
DZJ ₁ -73			310				19.50
DZJ ₁ -74			410				23.11
DZJ ₁ -75			510				26.82
DZJ ₁ -76			610				30.10
DZJ ₁ -82	8	a1=180 a2=240 × 2	210	625	40 ([6.3])	1710	23.43
DZJ ₁ -83			310				26.08
DZJ ₁ -84			410				30.85
DZJ ₁ -85			510				35.83
DZJ ₁ -86			610				103.99
DZJ ₁ -92	9	a1=180 × 2 a2=240 × 2	210	625	40 ([6.3])	1890	25.44
DZJ ₁ -93			310				28.20
DZJ ₁ -94			410				32.97
DZJ ₁ -95			510				38.27
DZJ ₁ -96			610				42.51

电缆桥架在电缆隧道安装(二)

Cable tray mounted in cable culvert (II)

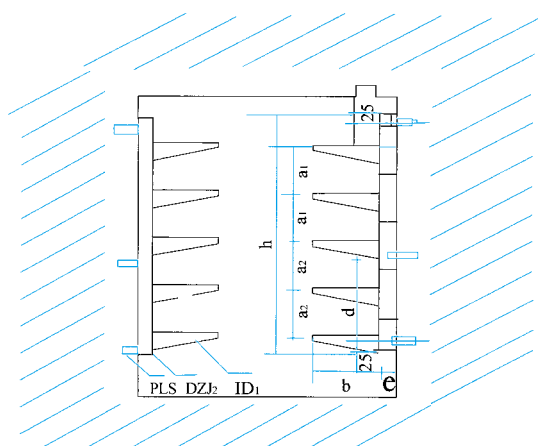

型 号 Model	名 称 Description
DZJ ₂	Cable support 电缆支架
PLS	Embedded bolt 膨胀螺栓

电缆支架间距: 电力电缆: 1500mm
Spacing between supports: 1500mm for power cables

n 为悬臂个数
n: number of brackets

型 号 Model	n 个	amm	bmm	dmm	emm	hmm	单重(kg) Unit weight
DZJ ₂ -62	6	a1=230 × 2 a2=280 × 3	210	470	50 ($\angle 50 \times 5$)	1230	14.10
DZJ ₂ -63			310				16.32
DZJ ₂ -64			410				16.54
DZJ ₂ -65			510				23.64
DZJ ₂ -66			610				27.03
DZJ ₂ -72	7	a1=230 × 2 a2=280 × 4	210	750	63 ($\angle 63 \times 6$)	1470	20.99
DZJ ₂ -73			310				23.64
DZJ ₂ -74			410				27.88
DZJ ₂ -75			510				32.22
DZJ ₂ -76			610				36.15
DZJ ₂ -82	8	a1=230 × 2 a2=280 × 5	210	750	40 ([6.3])	1710	27.67
DZJ ₂ -83			310				30.32
DZJ ₂ -84			410				35.09
DZJ ₂ -85			510				40.07
DZJ ₂ -86			610				44.94
DZJ ₂ -92	9	a1=230 × 2 a2=280 × 5	210	750	40 ([6.3])	1890	29.68
DZJ ₂ -93			310				34.45
DZJ ₂ -94			410				101.76
DZJ ₂ -95			510				43.57
DZJ ₂ -96			610				38.05

TPC

本部分主要是各种型号电缆桥架的通用附件。它是在电缆桥架安装中变宽、变高、连接、转向和分隔等必需的配件。


This group are mostly common accessories for all types of cable supports system. They are necessary parts for widening, heightening, connecting, turning and separating of cable supports system during erection.

附

件


Accessories

TPC-01 直接片
Straight connection piece

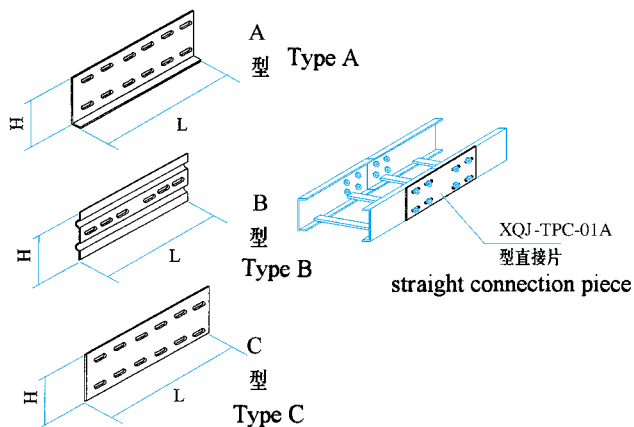


型 号 Model	配套高度 Matching height	L (mm)	H (mm)	单 重 (kg)
A 型	TPC-01A-5	50	35	0.90
	TPC-01A-6	60	45	1.00
	TPC-01A-8	80	55	1.49
	TPC-01A-10	100	75	1.70
	TPC-01A-15	150	125	2.13
	TPC-01A-20	200	175	3.55
	TPC-01A-30	300	275	5.33
B 型	TPC-01B-10	100	75	1.53
	TPC-01B-15	150	125	1.93
	TPC-01B-20	200	175	3.23
C 型	TPC-01C-10	100	75	1.31
	TPC-01C-15	150	125	1.72
	TPC-01C-20	200	175	3.02

TPC-02 内接片
Inner connectio piece

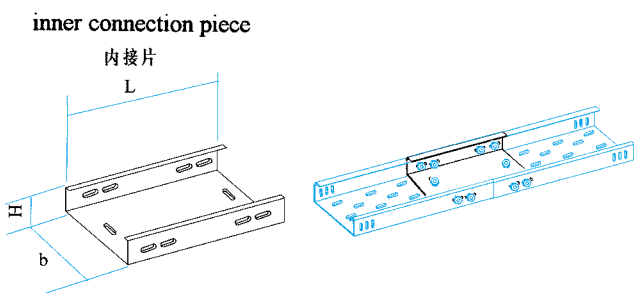


型 号 Model	配套高度 Matching height	H (mm)	b (mm)	L (mm)	单 重 (kg)
TPC-02-5	50	45	95	240	0.95
TPC-02-6	60	55	115		1.18
TPC-02-8	75	65	145		1.80
TPC-02-10	100	90	195		2.78
TPC-02-15	150	140	295		4.49

TPC-03 弯接片
Bend connection piece

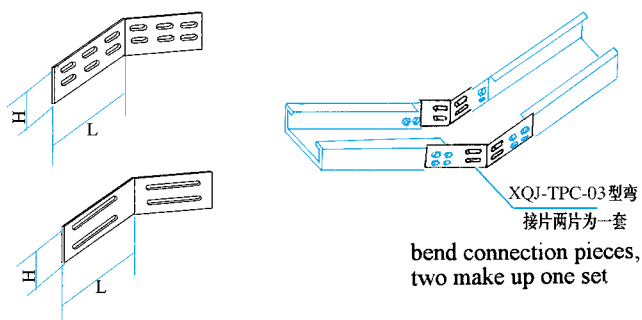


型 号 Model	配套高度 Matching height	H (mm)	L (mm)	单 重 (kg)
TPC-03-5	50, 60	35	120	0.86
TPC-03-8	85	55		1.09
TPC-03-10	100	75		1.88
TPC-03-15	150	125		2.36
TPC-03-20	200	175		3.61
TPC-03-30	300	275		5.41

TPC-04A 型调角片
Angle adjusting piece

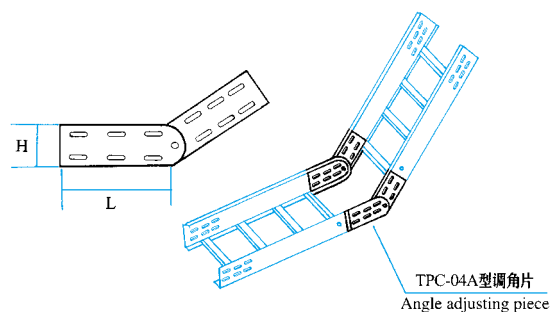


型号 Model	配套高度 Matching height	H (mm)	L (mm)	单重 (kg)
TPC-04A-6	60	55	200	0.65
TPC-04A-10	100	95		1.19
TPC-04A-15	150	145		2.14
TPC-04A-20	200	195		3.16
TPC-04A-30	300	295		5.00

TPC-04B 型调高片
Height adjusting piece

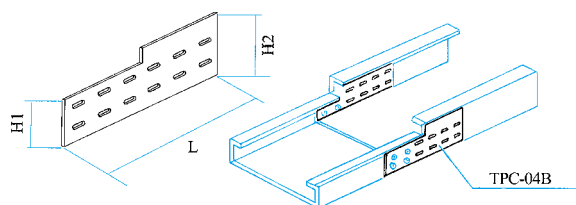

型号 Model	H ₁ (mm)	H ₂ (mm)	L (mm)	单重 (kg)
TPC-04B-60/100	55	95	240	1.00
TPC-04B-60/150	55	145		1.72
TPC-04B-100/150	95	145		1.72
TPC-04B-100/200	95	195		1.72
TPC-04B-150/200	145	195		2.23
TPC-04B-200/400	195	395		2.23


TPC-04C 型调宽片
Width adjusting piece

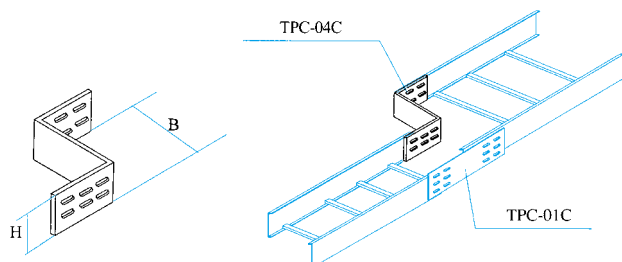

型号 Model	配套高度 Matching height	H ₂ (mm)	宽度 B Width B	L (mm)	单重 (kg)
TPC-04C-6-1	60	55	100	240	1.03
TPC-04C-6-2			200		1.30
TPC-04C-6-3			300		1.55
TPC-04C-6-4			400		1.72
TPC-04C-10-1	100	95	100		1.84
TPC-04C-10-2			200		2.05
TPC-04C-10-3			300		2.62
TPC-04C-10-4			400		3.12
TPC-04C-15-1	150	145	100		1.99
TPC-04C-15-2			200		2.83
TPC-04C-15-3			300		3.51
TPC-04C-15-4			400		4.30
TPC-04C-20-1	200	195	100		3.43
TPC-04C-20-2			200		4.14
TPC-04C-20-3			300		4.97
TPC-04C-20-4			400		5.87

TPC-05A压板

Holddown plate

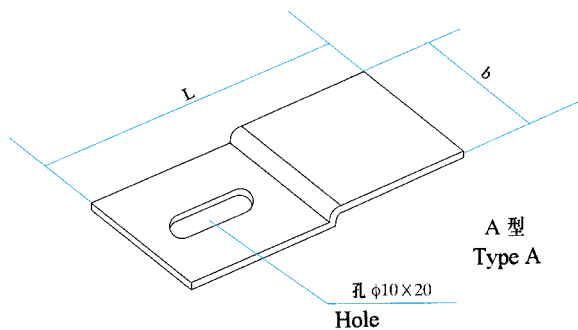


序号 No.	型 号 Model	规 格 Size	
		L	b
1	TPC-05A-7	70	30
2	TPC-05A-8	80	40
3	TPC-05A-10	100	50

注：用于梯级式桥架

Note: Suitable for ladder type support material S4

TPC-05B压板

Holddown plate

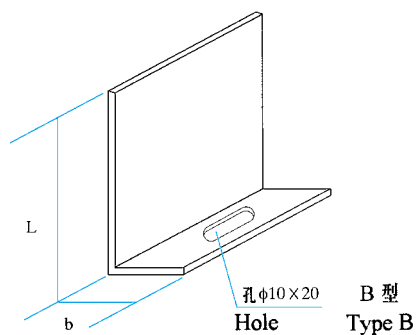


序号 No.	型 号 Model	规 格 Size	
		L	b
1	TPC-05B-5	53	50
2	TPC-05B-6	63	50
3	TPC-05B-8	83	50
4	TPC-05B-10	103	50
5	TPC-05B-15	153	50
6	TPC-05B-20	203	50
7	TPC-05B-30	303	50
8	TPC-05B-40	403	50

注：用于槽式桥架

Note: Suitable for channel type support material S4

TPC-07隔板

Partition plate

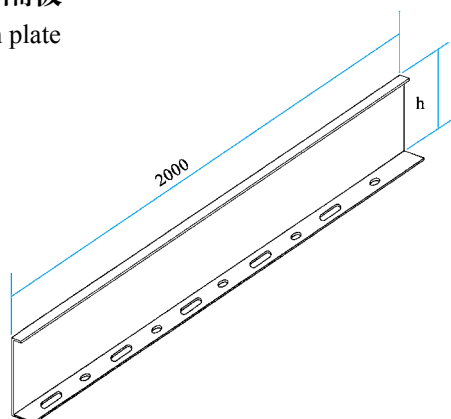


Note: A partition plate is used to separate power cables from control cables in the same support tray. h1 is used for ladder type and h2 for tray and channel type.

序号 No.	型 号 Model	配套高度 Matching height	h1	h2	重量(kg) Weight	
					h1	h2
1	TPC-07-5	50.60	35	40	2.99	3.22
2	TPC-07-6	70		65		4.37
3	TPC-07-8	100	75	90	4.45	5.49
4	TPC-07-10	125		115		8.32
5	TPC-07-15	150	125	140	8.88	9.75
6	TPC-07-20	200		190		15.64
7	TPC-07-30	300		290		22.12
8	TPC-07-40	400		390		28.63

注：隔板适用于在同一电缆桥架内将动力电缆与控制电缆隔开。h1用于梯级式桥架，h2用托盘式和槽式桥架。

TPC-08直通护罩


Straihght cover



序号 No.	型 号 Model	宽度 Width B	重量 (kg) Weight
1	TPC-08-20	200	9.06
2	TPC-08-30	300	13.04
3	TPC-08-40	400	21.09
4	TPC-08-50	500	26.01
5	TPC-08-60	600	33.60
6	TPC-08-80	800	52.47
7	TPC-08-100	1000	65.53

TPC-09弯通护罩


Bend cover

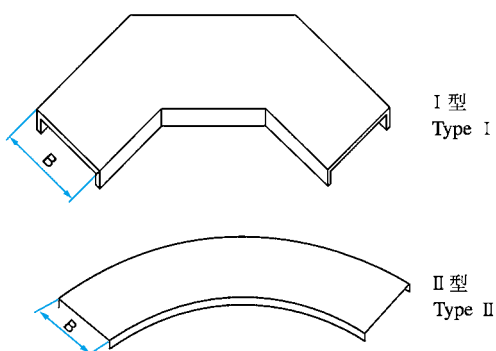

序号 No.	型 号 Model	宽度 Width B	重量 (kg) Weight	
			I 型	II 型
1	TPC-09-20	200	3.60	4.96
2	TPC-09-30	300	5.58	7.69
3	TPC-09-40	400	10.45	14.37
4	TPC-09-50	500	13.88	19.12
5	TPC-09-60	600	19.88	27.39
6	TPC-09-80	800	29.27	41.02
7	TPC-09-100	1000	46.36	63.89

TPC-10三通护罩

Tee cover

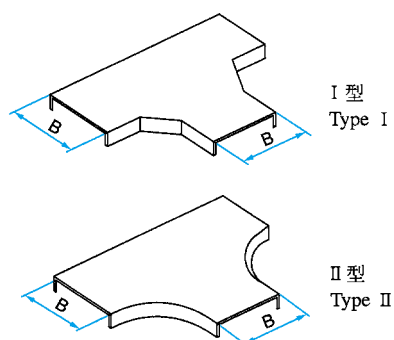

序号 No.	型 号 Model	宽度 Width B	重量 (kg) Weight	
			I 型	II 型
1	TPC-10-20	200	6.44	8.87
2	TPC-10-30	300	9.40	12.95
3	TPC-10-40	400	17.76	24.48
4	TPC-10-50	500	22.19	30.16
5	TPC-10-60	600	30.61	42.18
6	TPC-10-80	800	40.00	55.16
7	TPC-10-100	1000	54.50	75.10


附

件

Accessories

TPC-11四通护罩


Cross cover

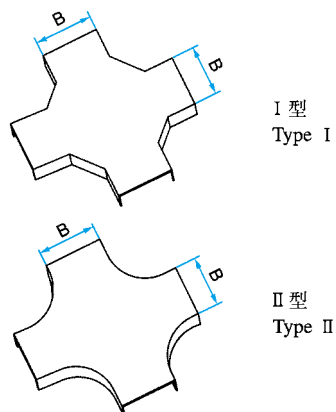

序号 No.	型号 Model	宽度 Width B	重量 (kg) Weight	
			I 型	II 型
1	TPC-11-20	200	9.91	12.88
2	TPC-11-30	300	13.08	19.94
3	TPC-11-40	400	23.03	29.94
4	TPC-11-50	500	29.39	38.15
5	TPC-11-60	600	32.53	42.28
6	TPC-11-80	800	51.08	66.20
7	TPC-11-100	1000	66.18	86.03

TPC-12A垂直凹弯通护罩


Vertical concave bend cover

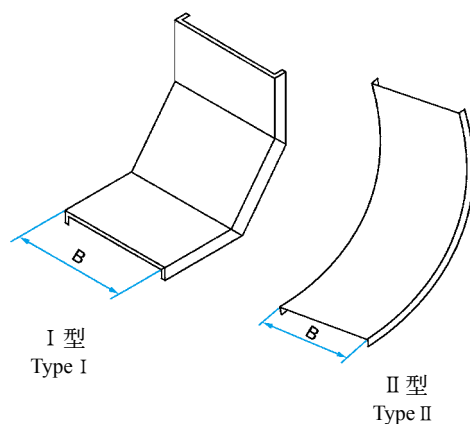

序号 No.	型号 Model	宽度 Width B	重量 (kg) Weight	
			I 型	II 型
1	TPC-12A-20	200	3.06	3.77
2	TPC-12A-30	300	4.32	5.62
3	TPC-12A-40	400	7.47	9.72
4	TPC-12A-50	500	9.18	11.94
5	TPC-12A-60	600	10.99	14.29
6	TPC-12A-80	800	14.25	18.52
7	TPC-12A-100	1000	19.35	24.62

TPC-12B垂直凸弯通护罩


Vertical convex bend cover

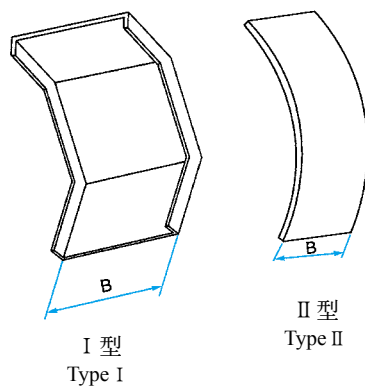

序号 No.	型号 Model	宽度 Width B	重量 (kg) Weight	
			I 型	II 型
1	TPC-12B-20	200	3.81	4.95
2	TPC-12B-30	300	6.15	7.00
3	TPC-12B-40	400	9.31	12.09
4	TPC-12B-50	500	11.43	14.85
5	TPC-12B-60	600	13.01	16.91
6	TPC-12B-80	800	17.67	22.97
7	TPC-12B-100	1000	25.12	32.66

TPC-13管接头


Pipe connector

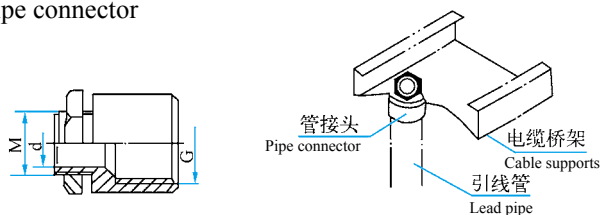

型号 Type	G	M	d
TPC-13-1/2"	1/2"	M22 × 1	18
TPC-13-3/4"	3/4"	M27 × 1.5	22
TPC-13-1"	1"	M33 × 1.5	28
TPC-13-1 1/2"	1 1/2"	M48 × 2	38
TPC-13-2"	2"	M56 × 2	48

GH管接头


Pipe connector



序号 No.	配管 Pipe G	尺寸 Size	
		L	H
1	G1/2"	122	74
2	G3/4"		
61	G1"		
4	G1 1/2"		
5	G2"		

GG管件


Pipe piece

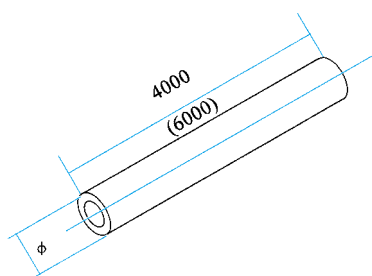

序号 No.	型 号 Model	Φ (mm)	重量 (kg) Weight	备 注 Remarks
1	GG-20	20	2.97	可按用户需要供货 Can be supplied to order
2	GG-25	25	4.45	
3	GG-40	40	6.25	
4	GG-60	60	7.53	

GZ管座


Pipe seat



序号 No.	型 号 Model	Φ (mm)	备 注 Remarks
1	GZ-20	20	可按用户需要供货 Can be supplied to order
2	GZ-25	25	
3	GZ-40	40	
4	GZ-60	60	

KGZ开关底座


Switch base



序号 No.	型 号 Model	L (mm)	备 注 Remarks
1	KGZ-20	200	可按用户需要供货 Can be supplied to order
2	KGZ-25	300	
3	KGZ-40	400	

GTF管接头


Pipe connector



序号 No.	型 号 Model	Φ (mm)	备 注 Remarks
1	GTF-20	20	可按用户需要供货 Can be supplied to order
2	GTF-25	25	
3	GTF-40	40	
4	GTF-60	60	

DGF吊板


Hanger piece



序号 No.	型号 Model	Φ (mm)	备注 Remarks
1	DGF-5	500	可按用户需要供货 Can be supplied to order
2	DGF-10	1000	
3	DGF-15	1500	
4	DGF-20	2000	

GDJ固定支架


Fixed support

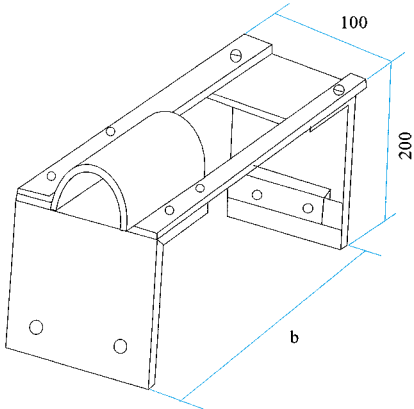

序号 No.	型号 Model	B (mm)	重量 (kg) Weight	备注 Remarks
1	GDJ-20	208	2.64	可按用户需要供货 Can be supplied to order
2	GDJ-25	308	2.72	
3	GDJ-40	408	2.82	
4	GDJ-50	508	2.94	
5	GDJ-60	608	3.03	



引下装置安装示意图

Schematic diagram of mounting for downward leading device

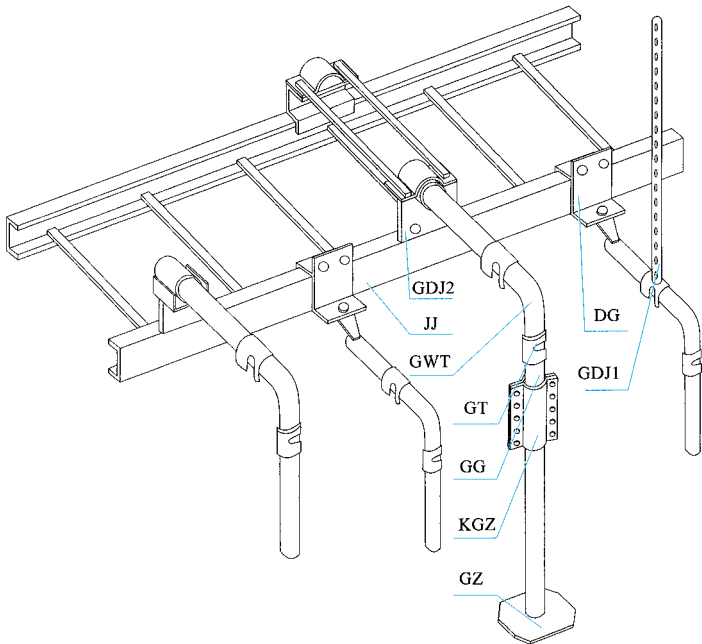

FJ-01吊板



Hanger piece



序号 No.	型号 Model	规格 Size	备注 Remarks
1	FJ-01	40 × 50	安装螺栓 Bolt: M8

FJ-02吊夹



Hanger clamp



序号 No.	型号 Model	重量 (kg) Weight	备注 Remarks
1	FJ-02/50	53	用于 50 × 50 配线槽 For 50 × 50 Cable duct
2	FJ-02/100	106	用于 100 × 50 配线槽 For 100 × 50 Cable duct

FJ-03吊框



Hanger Frame



序号 No.	型号 Model	重量 (kg) Weight	备注 Remarks
1	FJ-03/80	53	用于 50 × 50 配线槽 For 50 × 50 Cable duct
2	FJ-03/130	106	用于 100 × 50 配线槽 For 100 × 50 Cable duct

FJ-04吊板


Hanger piece



序号 No.	型号 Model	规格 Size	备注 Remarks
1	FJ-04	30 × 50	

FJ-05钢丝绳


Wire



序号 No.	型号 Model	规格 Size	备注 Remarks
1	FJ-05	φ3	长度按米计算 Length in m

FJ-06钢丝绳扎头



Wire clip



序号 No.	型号 Model	规格 Size	备注 Remarks
1	FJ-06	φ3	

FJ-07槽板



Channel plate



序号 No.	型号 Model	规格 Size	重量 (kg) Weight	备注 Remarks
1	FJ-07/200	200	0.25	用于电缆卡座和仪表基座 For cable holder and instrument bases
2	FJ-07/400	400	0.52	
3	FJ-07/600	600	0.77	
4	FJ-07/800	800	1.03	
5	FJ-07/1000	1000	1.29	

FJ-08异形槽板



Reducing Channel plate



序号 No.	型号 Model	规格 Size	重量 (kg) Weight	备注 Remarks
1	FJ-08/600	600	0.77	用于电缆卡座和仪表基座 For cable holder and instrument bases
2	FJ-08/1000	1000	1.29	
3	FJ-08/1500	1500	1.93	
4	FJ-08/2000	2000	2.58	

FJ-09花盘角铁



Angle with long holes



序号 No.	型号 Model	规格 Size	重量 (kg) Weight	备注 Remarks
1	FJ-09/200	200	0.80	用于电缆卡座和仪表基座 For cable holder and instrument bases
2	FJ-09/600	600	2.30	
3	FJ-09/1000	1000	3.82	
4	FJ-09/1500	1500	5.87	
5	FJ-09/2000	2000	7.74	

K-01单面电缆卡



Single sided cable clamp



序号 No.	型号 Model	规格 Size	备注 Remarks
1	K-01/13	13	φ10-13
2	K-01/17	17	φ14-17
3	K-01/21	21	φ22-25
4	K-01/25	25	φ25-29
5	K-01/29	29	配用电缆直径According to cable diameter

K-02双面单根电缆卡


Double single clamp for single cable



序号 No.	型号 Model	规格 Size	备注 Remarks
1	K-02/13	13	φ10-13
2	K-02/17	17	φ14-17
3	K-02/21	21	φ22-25
4	K-02/25	25	φ25-29
5	K-02/29	29	配用电缆直径According to cable diameter

K-03双根电缆卡


Double cable clamp




序号 No.	型号 Model	规格 Size	备注 Remarks
1	K-03/13	13	φ10-13
2	K-03/17	17	φ14-17
3	K-03/21	21	φ22-25
4	K-03/25	25	φ25-29
5	K-03/29	29	配用电缆直径According to cable diameter

K-04管缆卡

Pipe cable clamp





Hold down bolt



序号 No.	型号 Model	规格 Size	备注 Remarks
1	K-04/8	φ8	在少量管缆敷设时作 定位用 For fixing small number of pipe cable
2	K-04/10	φ10	
3	K-04/12	φ12	
4	K-04/14	φ14	
5	K-04/16	φ16	
6	K-04/18	φ18	
7	K-04/20	φ20	
8	K-04/22	φ22	

K-05多根电缆卡


Clamp for multicables



序号 No.	型号 Model	规格 Size H × B	备注 Remarks
1	K-05/50	30 × 50	用于电缆直径小 量多固定 For fixing large number of small-diameter cables
2	K-05/47	97 × 47	
3	K-05/87	97 × 87	

K-06电缆卡带



Cable clamp strip



序号 No.	型号 Model	规格 Size B × H	备注 Remarks
1	K-06/120	120 × 9	作捆扎电缆用 For binding cables
2	K-06/160	160 × 9	
3	K-06/260	260 × 9	

K-07电缆卡子


Cable clamp



序号 No.	型号 Model	规格 Size B × H	配电 Cable	备注 Remarks
1	K-07/30	30 × 50	φ15-30	配FJ-07槽板 With FJ-07 channel plate
2	K-07/50	50 × 75	φ30-50	
3	K-07/75	75 × 100	φ50-70	



K-08电缆卡子

Cable clamp





序号 No.	型号 Model	规格 Size B × H	配电 Cable	备注 Remarks
1	K-08/30	30 × 50	φ15-30	配FJ-09槽板 With FJ-09 channel plate
2	K-08/50	50 × 75	φ30-50	
3	K-08/75	75 × 100	φ50-70	

方颈螺栓 Square neck bolt





序号 No.	型 号 Model	规格 Size M × L	备 注 Remarks
1	IS-01/6	M6 × 16	用于各种桥架连接紧固 For connection and tightening of various supports
2	IS-01/81	M8 × 20	
3	IS-01/82	M8 × 25	

半圆螺栓 Semi-rounded bolt





序号 No.	型 号 Model	规格 Size M × L	备 注 Remarks
1	IS-02/6	M6 × 16	用于电缆卡子和其它连接 For cable clamps and other connections
2	IS-02/81	M8 × 20	
3	IS-02/82	M8 × 25	

六角螺栓 Hexagon bolt





序号 No.	型 号 Model	规格 Size M × L	备 注 Remarks
1	IS-03/10	M10 × 30	用于立柱底座托臂和其它连接 For column bases, brackets and other connections
2	IS-03/12	M12 × 40	

T形螺栓(一) T-bolt I




序号 No.	型 号 Model	规格 Size M × L	备 注 Remarks
1	IS-04/8	M6 × 16	配FJ-07槽板 With FJ-07 channel plate
2	IS-04/10	M8 × 25	

T形螺栓(二) T-bolt II




序号 No.	型 号 Model	规格 Size M × L	备 注 Remarks
1	IS-05/10	M10 × 35	配FJ-08异径槽板 With FJ-08 channel plate

膨胀螺栓 Expansion bolt



序号 No.	型 号 Model	规格 Size M × L	备 注 Remarks
1	IS-06/6	M6 × 65	用于立柱底座与墙的连接 For column bases wall connections
2		M6 × 80	
3	IS-06/8	M8 × 80	
4	IS-06/10	M10 × 95	
5		M10 × 110	
6		M10 × 125	
7	IS-06/12	M12 × 95	
8		M12 × 110	

内膨胀螺栓 Inner expansion bolt



序号 No.	型 号 Model	规格 Size M × L	备 注 Remarks
1	IS-07/10	M10 × 35	用于通丝吊杆 (XQJ-20-10吊杆)直接与 楼板固定 For hanger (XQJ-20-10 hanger) floor directly connection
2	IS-07/12	M12 × 35	
3	IS-07/16	M16 × 40	

喷塑颜色色板

Spaying Colors Palette




桔纹灰 (726)
DZ-S01
Orange gray



浅驼灰
DZ-S02
Light camel gray



桔红
DZ-S03
Orange red



象牙白
DZ-S04
Ivory white



果绿
DZ-S05
Fruit green



银灰
DZ-S06
Silver gray



此色样仅供参考，可按客户要求订制。

These color samples are only for reference, we could customize as required.

诚/信/如/鼎 品/质/为/圣



鼎圣集团有限公司
DINGSHENG GROUP CO.,LTD.

地址：江苏省扬中市三茅街道城北科技产业园裕兴路988号

Add:No.988 Yuxing Road, Chengbei Industry

Zone, Yangzhong City JiangSu Province.

电话(Tel): 0511-88431800

传真(Fax): 0511-88431200

邮编(P.C): 212213

E-mail:dingshenggroup1@163.com

Http://www.Dingshenggroup.net